

SUSTAINABLE CONSTRUCTIVE SOLUTIONS


WATERPROOFING / UNCOUPLING / DRAINAGE / SHOWERS



revestech®




1	I+D+i NEW ECODRY LINE.....	04
2	SUMMARY OF PRODUCTS.....	14
3	WATERPROOFING ECODRY120 ECODRY80 ECODRY50 SINGULAR POINTS.....	26 28 34 42 48
4	UNCOUPLING..... DY50	54 54
5	MULTIFUNCTION..... ACU200	62 62
6	DRAINAGE..... SWIMMING POOLS / DECKS / TERRACES WELLNESS CENTERS / SPAS_ WALKLEVEL CONCEALED DRAINAGE OUTDRAIN LEVEL SYSTEM.....	68 70 84
7	SPECIAL SOLUTIONS..... JOINT STRIPS FOR ARTIFICIAL GRASS_ JOINT & JOINT S SUBWATER	86 88 91
8	SHOWERS..... TYPES OF DRAINS..... LEVEL SYSTEMS..... DRY50 SYSTEMS..... BASIC LINE SYSTEMS..... TRENDY STANDS COLLECTION	92 96 100 124 146 152
9	REVESTTECH UNIVERSE..... HISTORY..... TRAINING..... R+D+i..... R+D+i PROJECTS..... CERTIFICATIONS..... DIGITAL PRESENCE..... REFERENCE PROJECTS..... EXHIBITIONS..... COMPANY.....	156 158 160 162 163 164 165 166 174 176

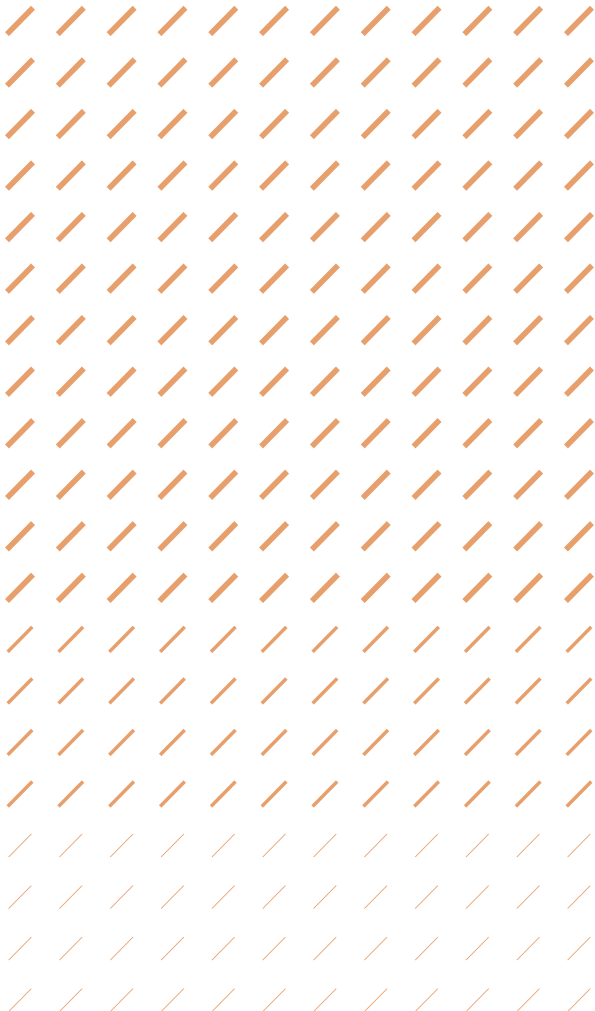


Leaders in responsible waterproofing.

In **REVESTECH SOLUTIONS S.L.** we offer solutions in the field of sustainable waterproofing for different sectors and particular projects. Thanks to a constant commitment to innovation, today we are specialists and manufacturers of revolutionary construction systems for waterproofing and water draining of all types of surfaces such as terraces, roofs, balconies, decks, showers, etc.

revestech®

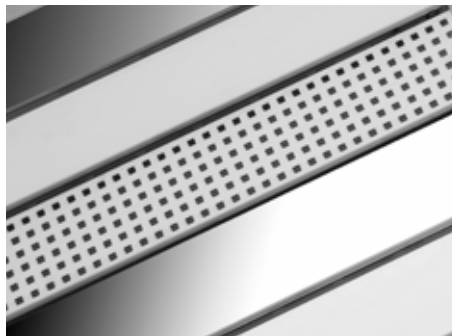

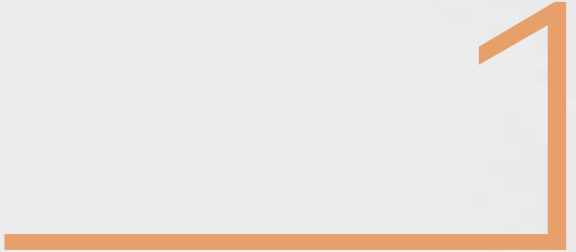

|+D+i



It is not incompatible to use environmentally friendly materials and optimize production processes to the maximum, with developing products as responsible as they are effective.

revestech®

NEW **ECODRY**® LINE

A membrane designed today and thought out for the future.


Our new line of **ECODRY** membranes achieve excellence in waterproofing, with a total commitment to the environment and advantages that make them as innovative as effective.

It is an eco-responsible membrane composed of a polymeric membrane of high-performance thermoplastic polyolefins CPE (EVA-based Circular Polymer), resulting from the transformation and treatment of raw materials of circular economy, and extruded on polyester or polypropylene fibres.

In addition, they have the EPD sustainability certification and the CE marking according to EN 13956:2012.



EN 13956:2012



We do not recycle; we transform into new raw material.

We have managed to develop a product with ideal performance through compounding and reactive extrusion, transforming circular economy materials into high performance polymers. In fact, today, we can say that our new membrane opens a new path toward sustainability.

Research and development



ECODRY®




Technical characteristics ECDRY®

	ECODRY50	ECODRY80	ECODRY120
Weight	335g/m ²	625g/m ²	525g/m ²
Thickness	0,52 mm	0,8 mm	1,25 mm
Tensile strength	L = 450 N/50 mm T = 150 N/50 mm	L = 800 N/50 mm T = 300 N/50 mm	L = 650 N/50 mm T = 500 N/50 mm
Elongation	L = 25% T = 200%	L = 27% T = 230%	L = 39% T = 70%
Resistance of overlaps (shear)	600 N/50 mm	770 N/50 mm	420 N/50 mm
Resistance to impact	200 mm	200 mm	200 mm
Resistance to static load	20 kg	20 kg	20 kg
Folding at low temperature	-40°C	-40°C	-40°C
Reaction to fire	E	E	E
Length	5 m / 30 m	5 m / 10 m / 20 m / 30 m	5 m / 10 m / 20 m / 30 m
Width	1 m / 1,2 m / 1,5 m	1,5 m	1,5 m
Straightness	50 mm	50 mm	50 mm
Flatness	10 mm	10 mm	10 mm
Dimensional stability	L = -0,2% T = -0,7%	L = -0,2% T = -0,5%	L = -0,4% T = -0,3%


ECODRY® VERSUS OTHER SYSTEMS

Waterproofing of substrates

As they are placed as the final and top component of the structure, they keep the entire substrate dry, avoiding its degradation mainly by the evaporation cycles of the moisture deposited in it.

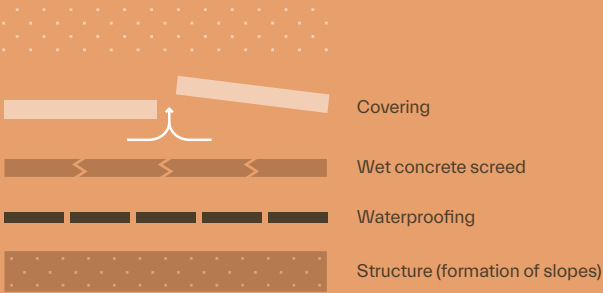


TRADITIONAL WATERPROOFING

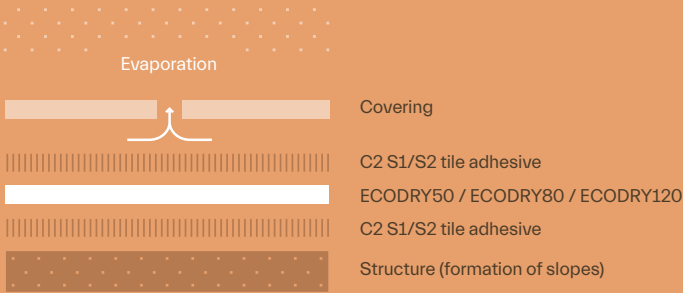


WATERPROOFING WITH
ECODRY50 / ECODRY80 / ECODRY120 MEMBRANES

Uncoupling effect

Since they are composed of a layer of polyolefins, they collaborate in the non-transmission of the movements between the compression layer and the covering, helping to avoid possible cracks in the joints and the future detachment of the finishing covering itself.

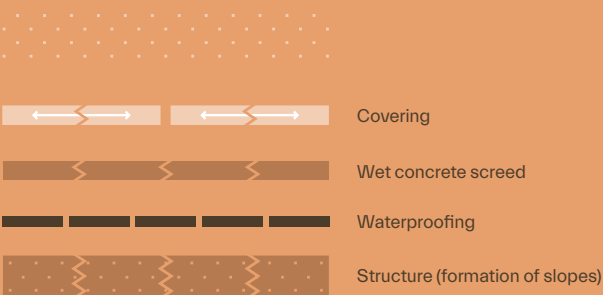


TRADITIONAL WATERPROOFING

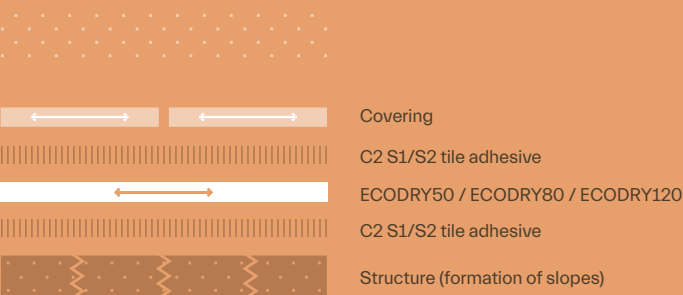


WATERPROOFING WITH
ECODRY50 / ECODRY80 / ECODRY120 MEMBRANES

Vapour pressure of the structure

The special geotextile of its rear face allows the circulation of air between the substrate and the membrane, evacuating the molecules of water vapour, avoiding the appearance of bubbles and keeping the structure dry, allowing its installation on structures with residual moisture of up to 5%.

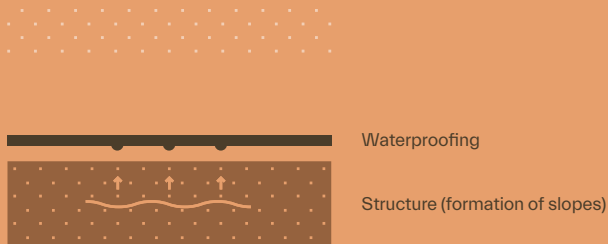


TRADITIONAL WATERPROOFING / LIQUID

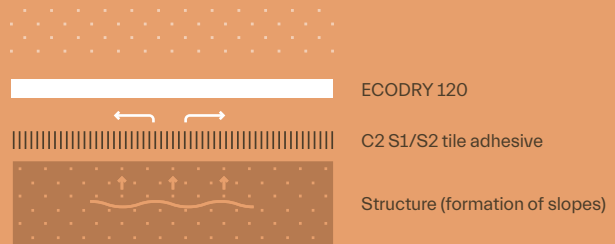


WATERPROOFING WITH ECODRY120 MEMBRANE

Resistance to alkalis and acids

Our membranes are totally resistant to the alkaline medium, as well as the acidic medium, not suffering any degradation with the passing of time and thus guaranteeing the perfect watertightness.

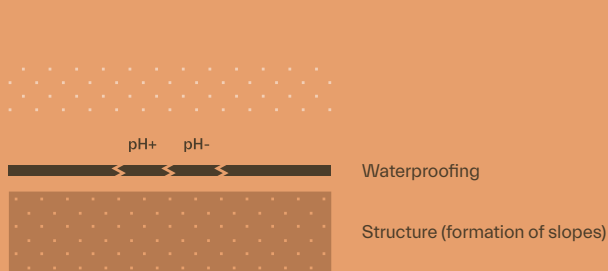

TRADITIONAL WATERPROOFING / LIQUID

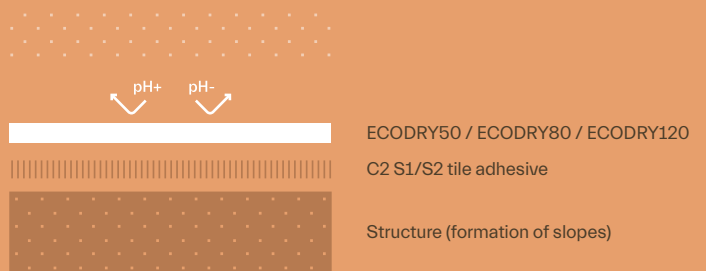

WATERPROOFING WITH
ECODRY50 / ECODRY80 / ECODRY120 MEMBRANES

TECHNICAL IMPROVEMENTS ECODRY® MEMBRANES

Greater thermal stability and durability.



It increases the memory of the membrane and improves its waterproofing capacity up to 80%.



Extraordinary plasticity and malleability.



Improves traction (↑ 60%), maximum resistance (↑ 66%) and maximum resistance deformation (↑ 70%).



It is more resistant to impact and static load than other waterproofing membranes.



Greater resistance to environmental external agents and chemical agents.



Total stability in alkaline and acid media.



Achieves better dimensional stability.




100 % recyclable.



2

SUMMARY OF PRODUCTS

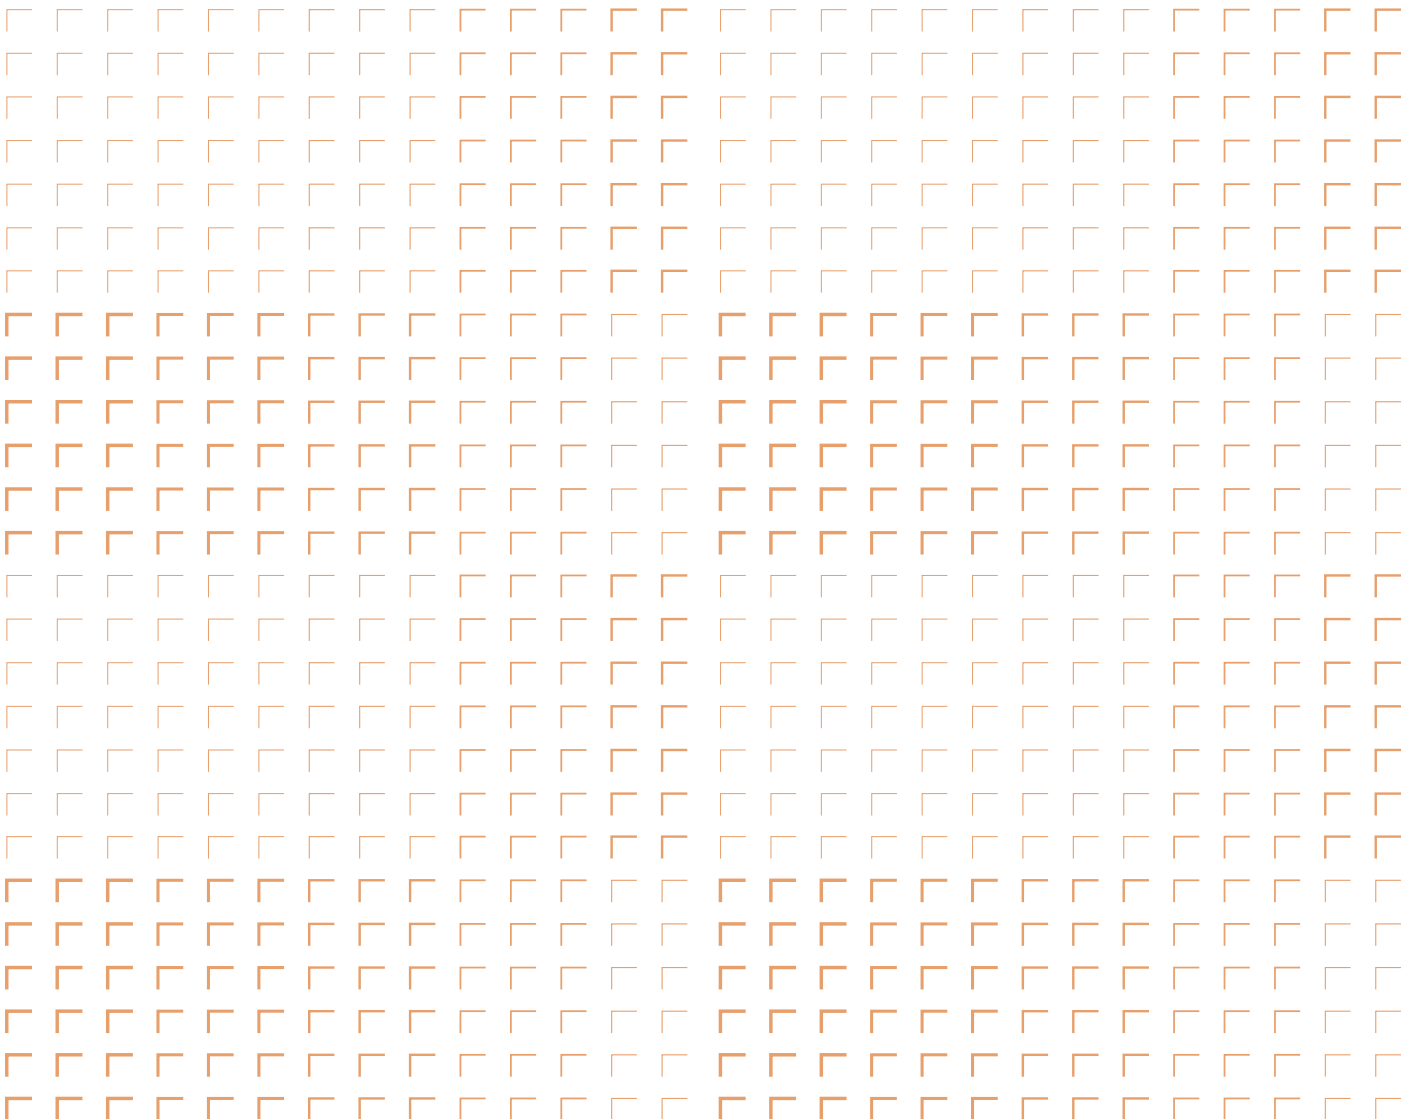

We present you this list so that you can easily see all our products. In the following pages, we develop what we really sell: system solutions for waterproofing and drainage.

MEMBRANES

WATERPROOFING AND UNCOUPLING

	596351714	ECODRY120 30	Roll of 1,5 m x 30 m · 45 m²	· ROOFS/ ROOF GARDENS · TERRACES · ROOFTOPS · BALCONIES · YARDS
	596351721	ECODRY120 20	Roll of 1,5 m x 20 m · 30 m²	
	596351738	ECODRY120 10	Roll of 1,5 m x 10 m · 15 m²	
	596351745	ECODRY120 5	Roll of 1,5 m x 5 m · 7,5 m²	
	596351875	ECODRY80 30	Roll of 1,5 m x 30 m · 45 m²	· ROOFS · TERRACES · ROOFTOPS · BALCONIES · YARDS · ROOF GARDENS
	596351882	ECODRY80 20	Roll of 1,5 m x 20 m · 30 m²	
	596351899	ECODRY80 10	Roll of 1,5 m x 10 m · 15 m²	
	596351905	ECODRY80 5	Roll of 1,5 m x 5 m · 7,5 m²	
	596351752	ECODRY50 450	Roll of 1,5 m x 30 m · 45 m²	· INTERIORS · WET AREAS · EXTERIOR AREAS (UP TO A 50 m ²) · WINDOWSILLS, CORNICES, BALCONIES
	596351851	ECODRY50 30	Roll of 1,2 m x 30 m · 36 m²	
	596351769	ECODRY50 75	Roll of 1,5 m x 5 m · 7,5 m²	
	596351868	ECODRY50 5	Roll of 1,2 m x 5 m · 6 m²	
	544010069	DRY120 30	Roll of 1,5 m x 30 m · 45 m²	· ROOFS · TERRACES · ROOFTOPS · BALCONIES · YARDS
	544010052	DRY120 20	Roll of 1,5 m x 20 m · 30 m²	
	544010045	DRY120 10	Roll of 1,5 m x 10 m · 15 m²	
	544010038	DRY120 5	Roll of 1,5 m x 5 m · 7,5 m²	
	544010243	DRY80 30	Roll of 1,5 m x 30 m · 45 m²	· ROOFS · TERRACES · ROOFTOPS · BALCONIES · YARDS · ROOF GARDENS
	544010236	DRY80 20	Roll of 1,5 m x 20 m · 30 m²	
	544010250	DRY80 10	Roll of 1,5 m x 10 m · 15 m²	
	544010267	DRY80 5	Roll of 1,5 m x 5 m · 7,5 m²	
	544010106	DRY50 450	Roll of 1,5 m x 30 m · 45 m²	· INTERIORS · WET AREAS · EXTERIOR UP TO 15 m ² · WINDOWSILLS, CORNICES, BALCONIES
	544010090	DRY50 30	Roll of 1,2 m x 30 m · 36 m²	
	544010083	DRY50 75	Roll of 1,5 m x 5 m · 7,5 m²	
	544010076	DRY50 5	Roll of 1,2 m x 5 m · 6 m²	
	544010618	DRY40 450	Roll of 1,5 m x 30 m · 45 m²	· INTERIORS · WET AREAS · EXTERIOR UP TO 7 m ²
	544010625	DRY40 75	Roll of 1,5 m x 5 m · 7,5 m²	
	544017365	PACK 10 DRY50 · 240	Pack of 10 units of membrane DRY50 of 2,4 m ² (1,2 x 2m)	· INTERIORS · EXTERIORS

MULTIFUNCTION _ WATERPROOFING / UNCOUPLING / SOUNDPROOFING / COMPENSATION OF VAPOUR

	544010229	ACU200 20	Roll of 1,5 m x 20 m · 30 m²	· EXTERIORS · INTERIORS · ROOFS · TERRACES · BALCONIES
	544010212	ACU200 10	Roll of 1,5 m x 10 m · 15 m²	
	544010205	ACU200 5	Roll of 1,5 m x 5 m · 7,5 m²	

ANTI-CRACKING _ EXTREME UNCOUPLING

	544017778	DYSO 30	Roll of 1,5 m x 20 m · 30 m²	· INTERIORS · EXTERIORS · UNDERFLOOR HEATING
	544016405	DYSO 15	Roll of 1,5 m x 10 m · 15 m²	
	544017761	DYSO 7,5	Roll of 1,5 m x 5 m · 7,5 m²	

REVESTECH® membranes are
GUARANTEED for 10 years
from the date the invoice is
issued. For more details of our
guarantees, you can contact our
commercial department.

WARRANTY
10 years


WATERPROOFING OF SWIMMING POOLS - EXCLUSIVE SYSTEM FOR INSTALLERS TRAINED AND APPROVED BY REVESTECH

SUBWATER KIT

  	596352360	KIT SUBWATER	WATERPROOFING MEMBRANE ECODRY120 20 Roll of 1,5 m x 20 m · 30 m ²	FOR EXTERIOR SURFACES UP TO 30 m ²
			SEALING BAND FOR JOINTS AND PERIMETER ECODRY BAND 13X30 Roll of 12,7 cm x 30 m (1ud.)	
			KIT POOL: SPECIAL FOR SEALING JOINTS AND EDGES: 1. ADHESIVE: TOPPLUS 6 2. PRIMER: PRIMERPOOL	

ACCESORY PARTS

WATERPROOFING REINFORCEMENTS

	596351912	ECODRY CORNERIN	2 units per bag	INTERIOR AND EXTERIOR ANGLES
	596351929		2 units per bag	
	544010793	DRY CORNERIN	2 units per bag	INTERIOR AND EXTERIOR ANGLES
	544010809		2 units per bag	
	596351936	ECODRY TUB 50	1 unit per bag	REINFORCEMENT FOR PIPES
	596351943		1 unit per bag	
	596351950		1 unit per bag	
	596352001		1 unit per bag	
	544010816	DRY TUB 20	2 units per bag	REINFORCEMENT FOR PIPES
	544015415		1 unit per bag	
	544015453		1 unit per bag	
	544015460		1 unit per bag	
	544016177		1 unit per bag	
	544016184		1 unit per bag	
	596352018	ECO CORNER BAND	Roll of 30 m x 12,7 cm (1u.)	SEALLING STRIP FOR ENCOUNTERS AT 90°
	544018133	CORNER BAND	Roll of 30 m x 12,7 cm (1u.)	SEALLING STRIP FOR ENCOUNTERS AT 90°

STRIPS

	596351776	ECODRY BAND 13X30	Roll of 12,7 cm x 30 m (1 unit)	SEALLING STRIP FOR JOINTS AND PERIMETER
	596352896		Roll of 12,7 cm x 5 m (1 unit)	
	596351783		Roll of 30 cm x 30 m (1 unit)	
	596352902		Roll of 30 cm x 5 m (1 unit)	
	544010113	DRY BAND 13X30	Roll of 12,7 cm x 30 m (1 unit)	SEALLING STRIP FOR JOINTS AND PERIMETER
	544010120		Roll of 12,7 cm x 5 m (1 unit)	
	544010144		Roll of 30 cm x 30 m (1 unit)	
	544010137		Roll of 30 cm x 5 m (1 unit)	
	544010755	ACU BAND	Roll of 48 mm x 20 m (1 unit)	SELF-ADHESIVE PERIMETER STRIP TO AVOID ACOUSTIC BRIDGES
	544011363	JOINT	Roll of 30 cm x 100 m	SEALLING STRIP FOR ARTIFICIAL GRASS
	544011370	JOINT-S	Roll of 30 cm x 100 m	

ACCESSORY PARTS

DRAINS WITH HEAT-SEALED REINFORCEMENT MEMBRANE



596352025	ECODRY SUMI56 100 V	Outlet Ø 32–40 vertical grid 10×10 cm	Box 1 unit Membrane 75 cm x 75 cm
596352032	ECODRY SUMI56 100 H	Outlet Ø 32–40 horizontal grid 10×10 cm	Box 1 unit Membrane 75 cm x 75 cm
596352049	ECODRY SUMI56 150 V	Outlet Ø 40–50 vertical grid 15×15 cm	Box 1 unit Membrane 75 cm x 75 cm
596352056	ECODRY SUMI56 200 V	Outlet Ø 90–110 vertical grid 20×20 cm	Box 1 unit Membrane 75 cm x 75 cm
596352063	ECODRY SUMI56 200 H	Outlet Ø 90 horizontal grid 20×20 cm	Box 1 unit Membrane 75 cm x 75 cm
596352070	ECODRY SUMI56 250 V	Outlet Ø 90–110 vertical grid 25×25 cm	Box 1 unit Membrane 75 cm x 75 cm
596352087	ECODRY SUMI56 300 V	Outlet Ø 90–110 vertical grid 30×30 cm	Box 1 unit Membrane 75 cm x 75 cm

DRAINS WITH
HEAT-SEALED
MEMBRANE




544011493	DRY SUMI56 100 V	Outlet Ø 32–40 vertical grid 10×10 cm	Box 1 unit Membrane 75 cm x 75 cm
544015392	DRY SUMI56 100 H	Outlet Ø 32–40 horizontal grid 10×10 cm	Box 1 unit Membrane 75 cm x 75 cm
544010687	DRY SUMI56 150 V	Outlet Ø 40–50 vertical grid 15×15 cm	Box 1 unit Membrane 75 cm x 75 cm
544010694	DRY SUMI56 200 V	Outlet Ø 90–110 vertical grid 20×20 cm	Box 1 unit Membrane 75 cm x 75 cm
544015385	DRY SUMI56 200 H	Outlet Ø 90 horizontal grid 20×20 cm	Box 1 unit Membrane 75 cm x 75 cm
544010700	DRY SUMI56 250 V	Outlet Ø 90–110 vertical grid 25×25 cm	Box 1 unit Membrane 75 cm x 75 cm
544010717	DRY SUMI56 300 V	Outlet Ø 90–110 vertical grid 30×30 cm	Box 1 unit Membrane 75 cm x 75 cm

DRAINS WITH
HEAT-SEALED
MEMBRANE



596353145	OUTDRAIN LEVEL 20	Horizontal outlet Ø 50 Drain 20×20 cm	Box 1 unit Membrane 53,8 cm x 53,8 cm
-----------	--------------------------	--	---

TILEABLE DRAIN
FOR TERRACES AND
BALCONIES
WITH HEAT-SEALED
MEMBRANE



STEEL GRID FOR ECODRY SUMI56 V DRAIN



596353299	STEEL GRID SUMI56 150	15×15 cm
-----------	------------------------------	----------

596353312	STEEL GRID SUMI56 200	20×20 cm
-----------	------------------------------	----------

316 STAINLESS STEEL
FRAME AND GRID KIT FOR
COVERING THE DRAIN
ECODRY SUMI56

Fixing with two
screws included in
ECODRY SUMI56 150 V





Screw fixing
included in
ECODRY SUMI56 200 V



ACCESSORY PARTS

RAIN SPOUTS & CHIMNEYS

	596351967	ECODRY RAIN SPOUT 50	Box 1 unit. Membrane 50 x 50 cm	COUPLING FOR HORIZONTAL EVACUATION
	596351974	ECODRY RAIN SPOUT 75	Box 1 unit. Membrane 50 x 50 cm	
	596351981	ECODRY RAIN SPOUT 90	Box 1 unit. Membrane 50 x 50 cm	
	596351998	ECODRY RAIN SPOUT 110	Box 1 unit. Membrane 50 x 50 cm	
	544010748	DRY RAIN SPOUT 50	Box 1 unit. Membrane 50 x 50 cm	COUPLING FOR HORIZONTAL EVACUATION
	544015187	DRY RAIN SPOUT 75	Box 1 unit. Membrane 50 x 50 cm	
	544015613	DRY RAIN SPOUT 90	Box 1 unit. Membrane 50 x 50 cm	
	544015897	DRY RAIN SPOUT 110	Box 1 unit. Membrane 50 x 50 cm	
	596352278	ECODRY CHIMNEY	Box 1 unit. Membrane 50 x 50 cm	VENTILATION CHIMNEY FOR ROOFS
	544010731	DRY CHIMNEY	Box 1 unit. Membrane 50 x 50 cm	VENTILATION CHIMNEY FOR ROOFS

ADHESIVES

	544010670	SEALPLUS 6	6 kg pot	SPECIAL ADHESIVE FOR OVERLAPS AND JOINTS
	544012858	SEALPLUS 0600	600 ml blister	SPECIAL ADHESIVE FOR OVERLAPS AND JOINTS
	596353343	TOPPLUS 6	6 kg pot	SPECIAL ADHESIVE FOR OVERLAPS AND JOINTS
	544015323	REVESTCHFLEX	300 ml cartridge	SPECIAL ADHESIVE FOR JOINTS

SPECIAL FOR SWIMMING POOLS

	544018065	PRIMERPOOL	2 kg pot	SPECIAL PRIMER FOR SEALING JOINTS AND EDGES
	544018072	KIT POOL	Box 1 unit	KIT POOL: SPECIAL FOR SEALING JOINTS AND EDGES: 1. ADHESIVE: TOPPLUS 6 2. PRIMER: PRIMERPOOL


DRAINAGE TERRACES AND POOLS **WALK LEVEL**

WATERPROOFING AND HIDDEN DRAIN

	544019680	WALK LEVEL CHANNEL 15 cm	Channel 95 cm long for ceramic tiles 15 cm wide.
	544019826	WALK LEVEL CHANNEL 30 cm	Channel 95 cm long for ceramic tiles 30 cm wide.
	544019772	WALK LEVEL DRAIN 15 cm	Evacuation drain of 1.38 l/s and outlet 63 mm male, 15 cm pieces.
	544019918	WALK LEVEL DRAIN 30 cm	Evacuation drain of 1.38 l/s and outlet 63 mm male, 30 cm pieces.
	544019697	WALK LEVEL ADJUSTMENT 85 X 15 CM	Adjustment piece of different lengths for 15 cm and 30 cm ceramic tiles: 15, 25, 35, 45, 55, 65, 75 and 85 cm.
	544019833	WALK LEVEL ADJUSTMENT 85 X 30 CM	
	544019703	WALK LEVEL ADJUSTMENT 75 X 15 CM	
	544019840	WALK LEVEL ADJUSTMENT 75 X 30 CM	
	544019710	WALK LEVEL ADJUSTMENT 65 X 15 CM	
	544019857	WALK LEVEL ADJUSTMENT 65 X 30 CM	
	544019727	WALK LEVEL ADJUSTMENT 55 X 15 CM	
	544019864	WALK LEVEL ADJUSTMENT 55 X 30 CM	
	544019734	WALK LEVEL ADJUSTMENT 45 X 15 CM	
	544019871	WALK LEVEL ADJUSTMENT 45 X 30 CM	
	544019741	WALK LEVEL ADJUSTMENT 35 X 15 CM	
	544019888	WALK LEVEL ADJUSTMENT 35 X 30 CM	
	544019758	WALK LEVEL ADJUSTMENT 25 X 15 CM	
	544019895	WALK LEVEL ADJUSTMENT 25 X 30 CM	
	596350168	WALK LEVEL LATERAL DRAIN 15 cm	Evacuation drain of 0.68 l/s and lateral outlet 50 mm male, 15 cm pieces.
	596350175	WALK LEVEL LATERAL DRAIN 30 cm	Evacuation drain of 0.68 l/s and lateral outlet 50 mm male, 30 cm pieces.
	544019789	WALK LEVEL CORNER 15 cm	Corner piece for 15 cm ceramic tiles.
	544019925	WALK LEVEL CORNER 30 cm	Corner piece for 30 cm ceramic tiles.
	596350441	WALK LEVEL OUTSIDE CORNER 15 cm	Corner piece for 15 cm ceramic tiles.
	596350458	WALK LEVEL OUTSIDE CORNER 30 cm	Corner piece for 30 cm ceramic tiles.
	544019796	WALK LEVEL CORNER DRAIN 15 cm	Corner evacuation drain of 1.38 l/s and outlet 63 mm male, 15 cm pieces.
	544019932	WALK LEVEL CORNER DRAIN 30 cm	Corner evacuation drain of 1.38 l/s and outlet 63 mm male, 30 cm pieces.
	544019802	WALK LEVEL SIDE A 15 cm	Channel start terminal for ceramic pieces 15 cm wide.
	544019949	WALK LEVEL SIDE A 30 cm	Channel start terminal for ceramic pieces 30 cm wide.
	544019819	WALK LEVEL SIDE B 15 cm	Channel closing terminal for ceramic pieces 15 cm wide.
	544019956	WALK LEVEL SIDE B 30 cm	Channel closing terminal for ceramic pieces 30 cm wide.

LEVEL SHOWERS

WATERPROOFING AND HIDDEN DRAINS

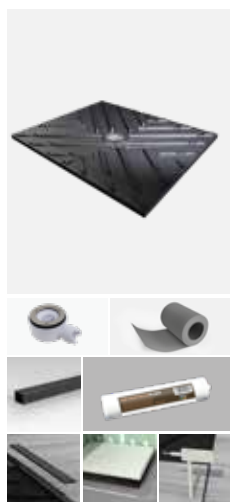

		measurement
544015941	LEVEL SHOWER TRAY 60x100	60 x 100 cm
544015200	LEVEL SHOWER TRAY 70x90	70 x 90 cm
544015958	LEVEL SHOWER TRAY 70x100	70 x 100 cm
544015965	LEVEL SHOWER TRAY 70x120	70 x 120 cm
544015156	LEVEL SHOWER TRAY 80x90	80 x 90 cm
544015224	LEVEL SHOWER TRAY 80x100	80 x 100 cm
544015231	LEVEL SHOWER TRAY 80x120	80 x 120 cm
544015972	LEVEL SHOWER TRAY 80x140	80 x 140 cm
544015248	LEVEL SHOWER TRAY 90x90	90 x 90 cm
544015255	LEVEL SHOWER TRAY 90x100	90 x 100 cm
544015194	LEVEL SHOWER TRAY 90x120	90 x 120 cm
544015989	LEVEL SHOWER TRAY 90x140	90 x 140 cm
544015309	LEVEL SHOWER TRAY 100x100	100 x 100 cm
544015316	LEVEL SHOWER TRAY 100x120	100 x 120 cm
544015996	LEVEL SHOWER TRAY 100x140	100 x 140 cm

PREFABRICATED HIDDEN SHOWER TRAY

INCLUDES: **LEVEL TRAY** Prefabricated tray with horizontal siphonic drain convertible into non-siphonic, perimeter waterproofing strip **ECODRY BAND**, finishing pieces for walls, supports for tiles **REVESTTECHFLEX**, special adhesive, installation protector and key for cleaning.




CUSTOMIZED MANUFACTURING ON REQUEST




		measurement	piece space
544015552	LINEAR LEVEL 10x60	13,8 x 63,8 cm	10 x 60 cm
544015576	LINEAR LEVEL 10x70	13,8 x 73,8 cm	10 x 70 cm
544015583	LINEAR LEVEL 10x80	13,8 x 83,8 cm	10 x 80 cm
544015910	LINEAR LEVEL 10x90	13,8 x 93,8 cm	10 x 90 cm
544015705	LINEAR LEVEL 20x60	23,8 x 63,8 cm	20 x 60 cm
544015712	LINEAR LEVEL 20x70	23,8 x 73,8 cm	20 x 70 cm
544015590	LINEAR LEVEL 20x80	23,8 x 83,8 cm	20 x 80 cm
544015927	LINEAR LEVEL 20x90	23,8 x 93,8 cm	20 x 90 cm

HIDDEN LINEAR DRAIN

INCLUDES: 1. **LINEAR LEVEL** base, with **ECODRY50** heat-sealed membrane, lateral siphonic drain convertible into non-siphonic, 1,5 x 2 m **ECODRY50** waterproofing membrane, **REVESTTECHFLEX** special adhesive and key for cleaning.

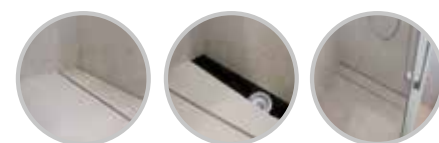

CUSTOMIZED MANUFACTURING ON REQUEST

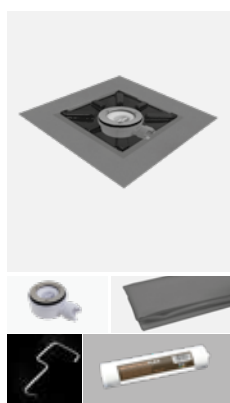

		measurement	piece space
544015361	SUMI LEVEL 20	23,8 x 23,8 cm	20 x 20 cm
544015606	SUMI LEVEL 30	33,8 x 33,8 cm	30 x 30 cm
544015903	SUMI LEVEL 40	43,8 x 43,8 cm	40 x 40 cm

HIDDEN SQUARE DRAIN

INCLUDES: 1. **SUMI LEVEL** base, with **ECODRY50** heat-sealed membrane, lateral siphonic drain convertible into non-siphonic, 1,5 x 1,5 m **ECODRY50** waterproofing membrane, **REVESTTECHFLEX** special adhesive and key for cleaning.

CUSTOMIZED MANUFACTURING ON REQUEST



		measurement	piece space
596354074	SECRET WALL LEVEL 40	43 x 22,5 cm	33 x 7,9 cm
596354067	SECRET WALL LEVEL 60	63 x 22,5 cm	33 x 7,9 cm


CONCEALED SHOWER DRAIN FOR PLASTERBOARD WALLS

INCLUDES:
Drain **SECRET WALL LEVEL** with **ECODRY50** waterproofing membrane adhered around its perimeter, ceramic tileable stainless steel lid, hooks to lift the ceramic piece. Available in two sizes: 40 cm and 60 cm.




DRY50 SHOWER SYSTEMS


WATERPROOFING AND DRAINAGE KITS

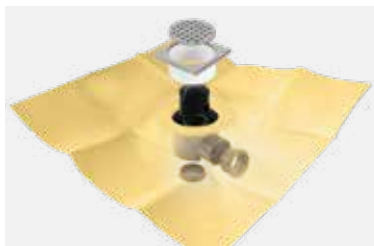


544010380	• DRY50 SUMI LUXE 025	membrane measurement	PREMIER Kit of siphonic drain with 10.7 x 10.7 cm grate to integrate with the tiles and with waterproofing membrane sealed to it, to guarantee the most critical point.
544010397	• DRY50 SUMI LUXE 144	0,5 x 0,5 m	
544010403	• DRY50 SUMI LUXE 225	1,2 x 1,2 m	
544010304	▲ DRY50 SUMI LUXE 240	1,5 x 1,5 m	
544011516	• DRY50 SUMI LUXE 240D	1,2 x 2 m	
544010410	▲ DRY50 SUMI LUXE 300	1,2 x 2 m	Outlets: Horizontal and vertical (40/50H_54 litre/minute).
544011547	• DRY50 SUMI LUXE 300D	1,5 x 2 m	
544010427	▲ DRY50 SUMI LUXE 375	1,5 x 2,5 m	Height: 82 mm.
544011554	• DRY50 SUMI LUXE 375D	1,5 x 2,5 m	

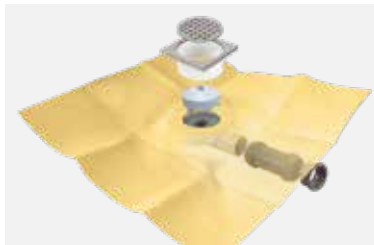

544010373	• DRY50 SUMI FLAT LUXE 025	membrane measurement	FLAT Kit of siphonic drain with 10.7 x 10.7 cm grate to integrate with the tiles and with waterproofing membrane sealed to it, to guarantee the most critical point.
544010328	• DRY50 SUMI FLAT LUXE 144	0,5 x 0,5 m	
544010335	• DRY50 SUMI FLAT LUXE 225	1,2 x 1,2 m	
544010342	▲ DRY50 SUMI FLAT LUXE 240	1,5 x 1,5 m	
544011424	• DRY50 SUMI FLAT LUXE 240D	1,2 x 2 m	
544010359	▲ DRY50 SUMI FLAT LUXE 300	1,2 x 2 m	Outlets: Horizontal and 40/50H_30 litre/minute.
544011561	• DRY50 SUMI FLAT LUXE 300D	1,5 x 2 m	
544010366	▲ DRY50 SUMI FLAT LUXE 375	1,5 x 2,5 m	Height: 65 mm
544011578	• DRY50 SUMI FLAT LUXE 375D	1,5 x 2,5 m	

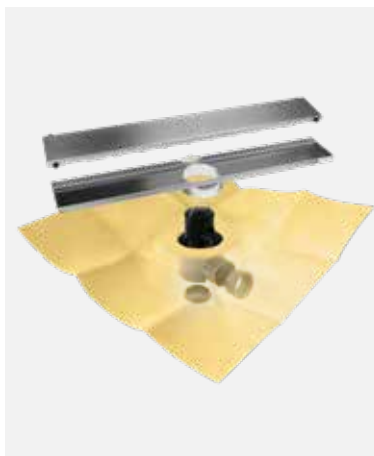

		grate measurement	membrane measurement	
544010908	• DRY50 LINEAR PREMIER 60 steel			
544011011	• DRY50 LINEAR PREMIER 60 chrome	60 cm	1,2 x 2 m	
544010823	• DRY50 LINEAR PREMIER 60 squares			
544010915	• DRY50 LINEAR PREMIER 70 steel			
544010960	• DRY50 LINEAR PREMIER 70 chrome	70 cm	1,5 x 2 m	Drainage kit with linear grate and DRY50 waterproofing membrane heat-sealed to the PREMIER drain.
544010830	• DRY50 LINEAR PREMIER 70 squares			
544010922	• DRY50 LINEAR PREMIER 80 steel			
544010977	• DRY50 LINEAR PREMIER 80 chrome	80 cm	1,5 x 2 m	
544010847	• DRY50 LINEAR PREMIER 80 squares			
544010939	• DRY50 LINEAR PREMIER 90 steel			
544010984	• DRY50 LINEAR PREMIER 90 chrome	90 cm	1,5 x 2 m	Outlets: Horizontal and vertical (40/50H_54 litre/minute).
544010854	• DRY50 LINEAR PREMIER 90 squares			
544010946	* DRY50 LINEAR PREMIER 100 steel			
544010991	* DRY50 LINEAR PREMIER 100 chrome	100 cm	1,5 x 2 m	Height: 82 mm.
544010861	* DRY50 LINEAR PREMIER 100 squares			
544010953	* DRY50 LINEAR PREMIER 120 steel			
544011998	* DRY50 LINEAR PREMIER 120 chrome	120 cm	1,5 x 2 m	
544011004	* DRY50 LINEAR PREMIER 120 squares			

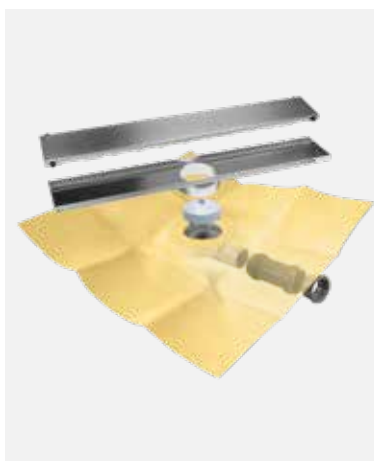

		grate measurement	membrane measurement	
544011028	• DRY50 LINEAR FLAT 60 steel			
544011110	• DRY50 LINEAR FLAT 60 chrome	60 cm	1,2 x 2 m	
544011035	• DRY50 LINEAR FLAT 60 squares			
544011066	• DRY50 LINEAR FLAT 70 steel			
544011165	• DRY50 LINEAR FLAT 70 chrome	70 cm	1,5 x 2 m	Drainage kit with linear grate and DRY50 waterproofing membrane heat-sealed to the FLAT drain.
544011042	• DRY50 LINEAR FLAT 70 squares			
544011073	• DRY50 LINEAR FLAT 80 steel			
544011103	• DRY50 LINEAR FLAT 80 chrome	80 cm	1,5 x 2 m	
544011059	• DRY50 LINEAR FLAT 80 squares			
544011080	• DRY50 LINEAR FLAT 90 steel			
544011172	• DRY50 LINEAR FLAT 90 chrome	90 cm	1,5 x 2 m	Outlets: Horizontal (40/50H_30 litre/minute).
544011141	• DRY50 LINEAR FLAT 90 squares			
544011097	* DRY50 LINEAR FLAT 100 steel			
544011189	* DRY50 LINEAR FLAT 100 chrome	100 cm	1,5 x 2 m	Height: 65 mm.
544011134	* DRY50 LINEAR FLAT 100 squares			
544011127	* DRY50 LINEAR FLAT 120 steel			
544012513	* DRY50 LINEAR FLAT 120 chrome	120 cm	1,5 x 2 m	
544011158	* DRY50 LINEAR FLAT 120 squares			



Steel



Chrome




Squares

Position of the drain in the DRY50 membrane:




LASER CUSTOMIZE OPTION


The linear grate of STEEL and CHROME design can be engraved with the company logo using laser technology. Consult conditions with the Commercial Department.

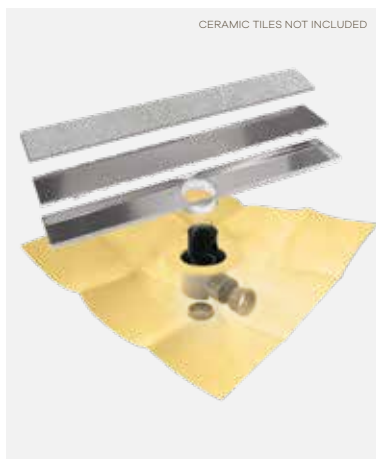

		grate measurement	membrane measurement	
544012209	• DRY50 LINEAR PREMIER 60 tileable	60 cm	1,2 x 2 m	Drainage kit with linear grate prepared to be covered with tiles and DRY50 waterproofing membrane heat-sealed to the PREMIER drain. Outlets: Horizontal and vertical Outlets (40/50H_54 litre/minute). Height: 82 mm.
544012100	• DRY50 LINEAR PREMIER 70 tileable	70 cm	1,5 x 2 m	
544012186	• DRY50 LINEAR PREMIER 80 tileable	80 cm	1,5 x 2 m	
544012254	• DRY50 LINEAR PREMIER 90 tileable	90 cm	1,5 x 2 m	
544011950	* DRY50 LINEAR PREMIER 100 tileable	100 cm	1,5 x 2 m	
544012612	* DRY50 LINEAR PREMIER 120 tileable	120 cm	1,5 x 2 m	

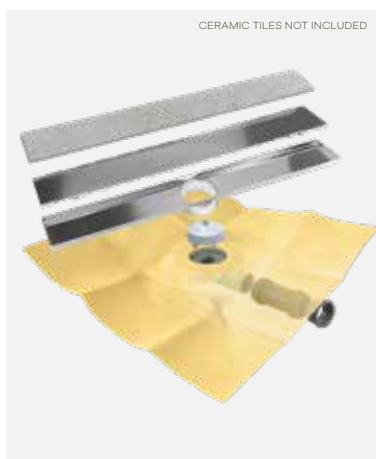


		grate measurement	membrane measurement	
544012124	• DRY50 LINEAR FLAT 60 tileable	60 cm	1,2 x 2 m	Drainage kit with linear grate prepared to be covered with tiles and DRY50 membrane heat-sealed to the FLAT drain. Outlets: Horizontal and vertical (40/50H_30 litre/minute). Height: 65 mm.
544011967	• DRY50 LINEAR FLAT 70 tileable	70 cm	1,5 x 2 m	
544012193	• DRY50 LINEAR FLAT 80 tileable	80 cm	1,5 x 2 m	
544012216	• DRY50 LINEAR FLAT 90 tileable	90 cm	1,5 x 2 m	
544012544	* DRY50 LINEAR FLAT 100 tileable	100 cm	1,5 x 2 m	
544012551	* DRY50 LINEAR FLAT 120 tileable	120 cm	1,5 x 2 m	

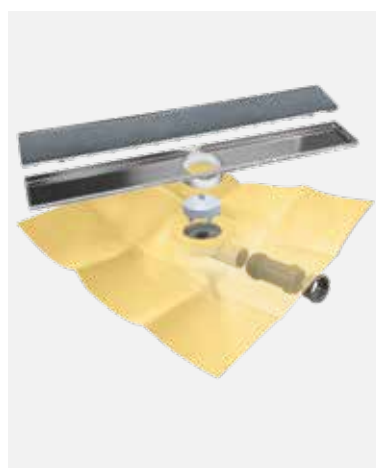

		grate measurement	membrane measurement	
544015767	• DRY50 LINEAR FLAT 60 mc	60 cm	1,2 x 2 m	Drainage kit with linear grate prepared to be filled with microcement and with DRY50 waterproofing membrane heat-sealed to the FLAT drain. Outlets: Horizontal and vertical (40/50H_30 litre/minute). Height: 65 mm.
544015934	• DRY50 LINEAR FLAT 70 mc	70 cm	1,5 x 2 m	
544016252	• DRY50 LINEAR FLAT 80 mc	80 cm	1,5 x 2 m	
544016382	• DRY50 LINEAR FLAT 90 mc	90 cm	1,5 x 2 m	
544016399	* DRY50 LINEAR FLAT 100 mc	100 cm	1,5 x 2 m	
544016269	* DRY50 LINEAR FLAT 120 mc	120 cm	1,5 x 2 m	

contains:
self-adhesive geotextile to place on the top of the grate, for a better grip of the covering.

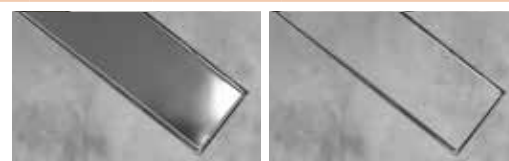


Position of the drain in the **DRY50** membrane:




DRY50 SLIM SHOWER SYSTEMS


WATERPROOFING AND DRAINAGE KITS

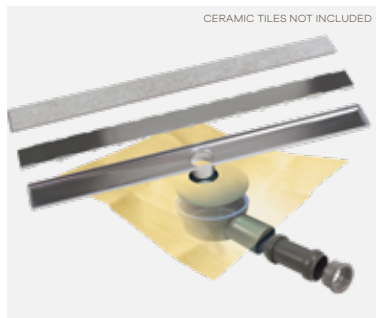


		grate measurement	membrane measurement	
544012957	• DRY50 LINEAR SLIM 60 tileable	60 cm	1,5 x 2 m	Drainage kit with linear grate prepared to be covered with tiles and DRY50 waterproofing membrane heat-sealed to the NOVO drain.
544012995	• DRY50 LINEAR SLIM 70 tileable	70 cm	1,5 x 2 m	Outlets: Horizontal (40/50H_36 litre/minute).
544013039	• DRY50 LINEAR SLIM 90 tileable	90 cm	1,5 x 2 m	Height: 60 mm.

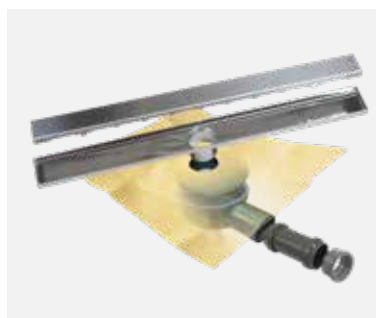

		grate measurement	membrane measurement	
544012933	• DRY50 LINEAR SLIM 60 steel	60 cm	1,5 x 2 m	Drainage kit with linear grate available in two different designs and DRY50 waterproofing membrane heat-sealed to the NOVO drain.
544012926	• DRY50 LINEAR SLIM 60 squares			
544012971	• DRY50 LINEAR SLIM 70 steel	70 cm	1,5 x 2 m	Outlets: Horizontal (40/50H_36 litre/minute).
544012964	• DRY50 LINEAR SLIM 70 squares			
544013015	• DRY50 LINEAR SLIM 90 steel	90 cm	1,5 x 2 m	Height: 60 mm.
544013008	• DRY50 LINEAR SLIM 90 squares			

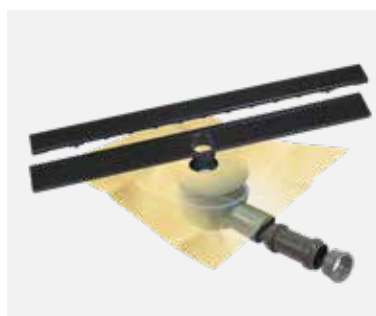

		grate measurement	membrane measurement	
544016344	• DRY50 LINEAR PREMIER 60 black	60 cm	1,5 x 2 m	Drainage kit with linear grate powder coated in black and DRY50 waterproofing membrane heat-sealed to the NOVO drain.
544016351	• DRY50 LINEAR PREMIER 70 black	70 cm	1,5 x 2 m	
544016368	• DRY50 LINEAR PREMIER 90 black	90 cm	1,5 x 2 m	

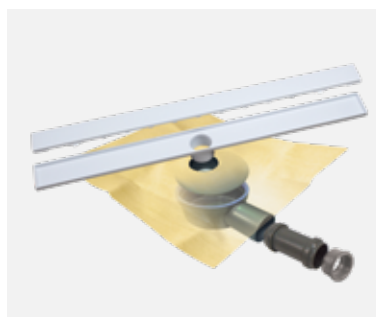

		grate measurement	membrane measurement	
544016313	• DRY50 LINEAR PREMIER 60 white	60 cm	1,5 x 2 m	Drainage kit with linear grate powder coated in white and DRY50 waterproofing membrane heat-sealed to the NOVO drain.
544016337	• DRY50 LINEAR PREMIER 70 white	70 cm	1,5 x 2 m	
544016320	• DRY50 LINEAR PREMIER 90 white	90 cm	1,5 x 2 m	



Position of the drain in the **DRY50** membrane:

•
Off center
Vertical
version






		membrane	description
544018423	SUMI BASIC	25 x 25 cm	BASIC drain kit and 10.5 x 10.5 cm square grate with perforated squares design finish, 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) DRY40 membrane. Total height (drain + grate): 60 mm.



		membrane	description
544018430	LINEAR BASIC SQUARES 50	25 x 25 cm	
544018447	LINEAR BASIC SQUARES 60	25 x 25 cm	
544018454	LINEAR BASIC SQUARES 70	25 x 25 cm	
544018461	LINEAR BASIC SQUARES 80	25 x 25 cm	BASIC drain kit and 6,1 cm wide linear grate with perforated squares design finish, 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) DRY40 membrane.
544018478	LINEAR BASIC SQUARES 90	25 x 25 cm	
544018485	LINEAR BASIC SQUARES 100	25 x 25 cm	Total height (drain + grate): 77,2 mm.
544018492	LINEAR BASIC SQUARES 120	25 x 25 cm	


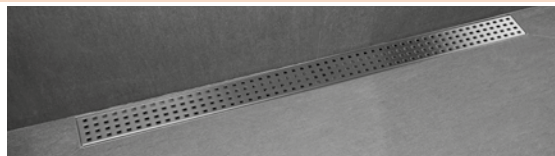


2 SOLUTIONS IN 1

tileable or steel




Reference	description	membrane	description
544018348	LINEAR BASIC DUO 50	25 x 25 cm	
544018362	LINEAR BASIC DUO 60	25 x 25 cm	
544018379	LINEAR BASIC DUO 70	25 x 25 cm	
544018386	LINEAR BASIC DUO 80	25 x 25 cm	BASIC drain kit and 6,1 cm wide linear grate with two design finishes: tileable on one side and steel on the other, with 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) DRY40 membrane.
544018393	LINEAR BASIC DUO 90	25 x 25 cm	Total height (drain + grate): 77,2 mm.
544018409	LINEAR BASIC DUO 100	25 x 25 cm	
544018416	LINEAR BASIC DUO 120	25 x 25 cm	

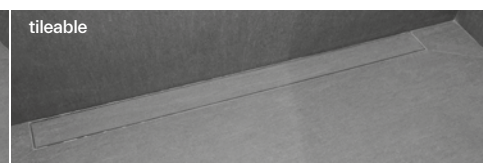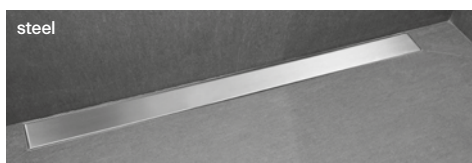


SHOWER STANDS COLLECTION

STANDS

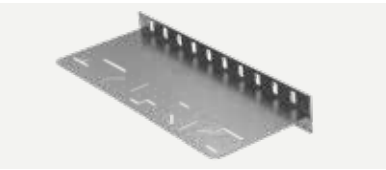
	reference	product	
	596353381	CLIP STAND	
	596353428	MINIMAL STAND	
	596353404	DUNES STAND	
	596353442	TETRIS STAND	
	596353398	BAMBOO STAND	
			

CORNER STANDS

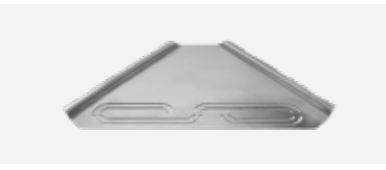	reference	product	
	596352995	CLIP CORNER STAND	
	596353459	MINIMAL CORNER STAND	
	596353015	DUNES CORNER STAND	
	596353039	TETRIS CORNER STAND	
	596353008	BAMBOO CORNER STAND	
			

3

WATERPROOFING

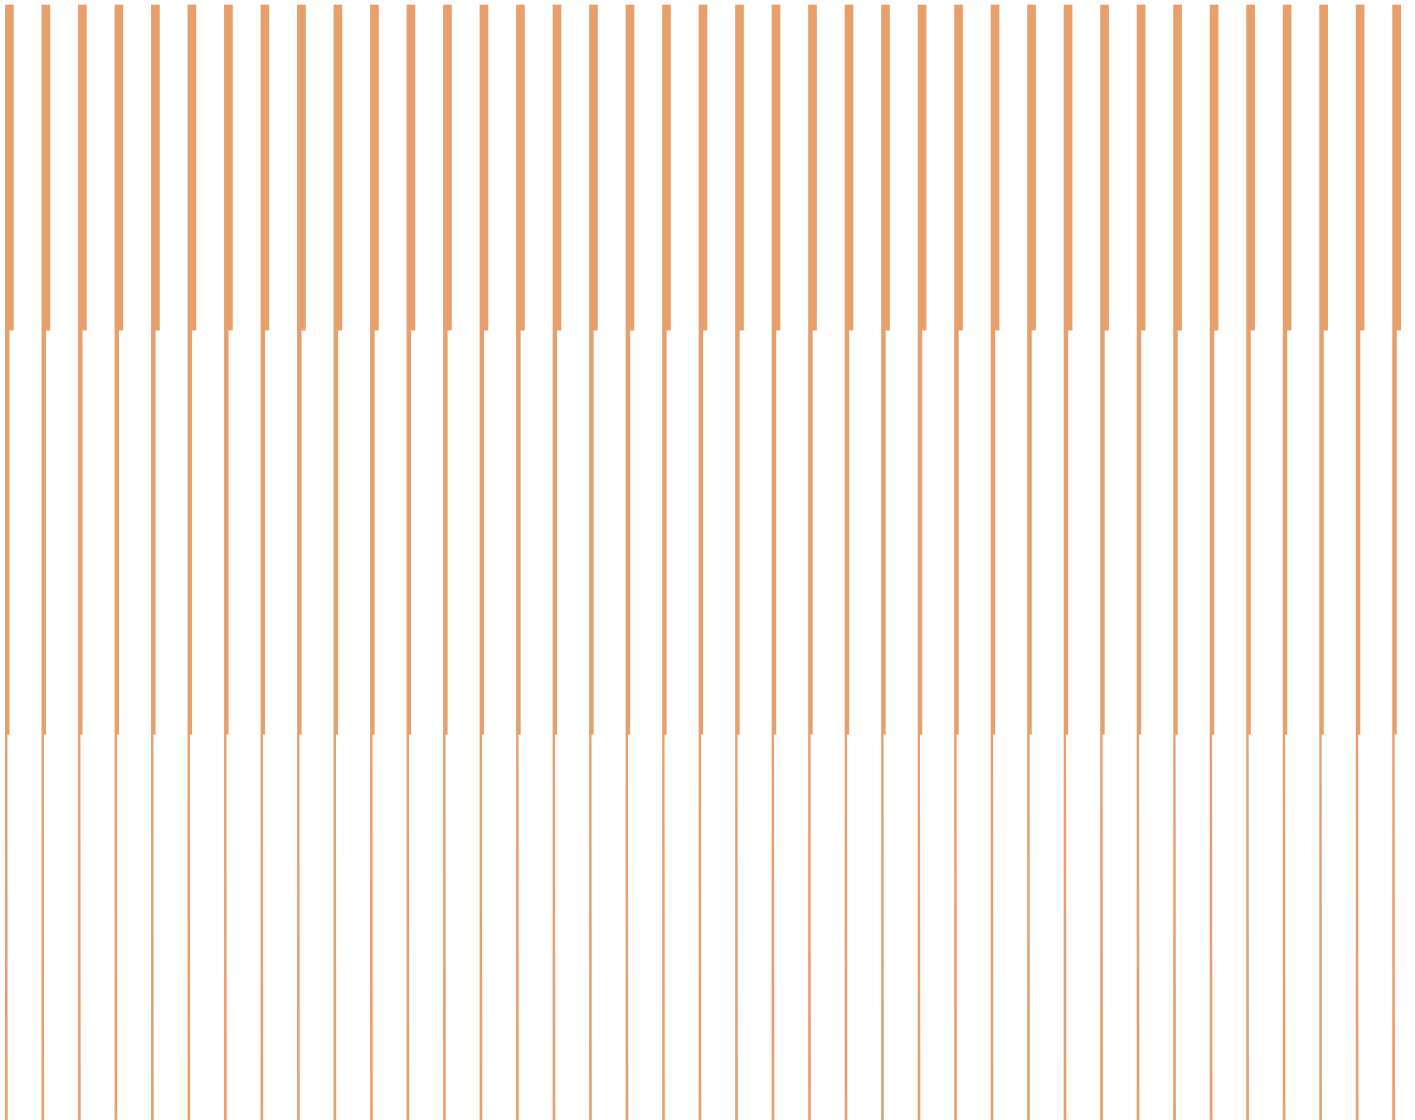

Spaces well waterproofed for life.
Projects with materials easy to install, low cost and
maximum quality. That's what we offer with our solutions.

FOR A LIFETIME



ECODRY120

WATERPROOFING AND
UNCOUPLING OF
ROOFS
TERRACES
ROOFTOPS
BALCONIES
YARDS
ROOF GARDENS


Eco-responsible multilayer membrane for the waterproofing and uncoupling under flooring of exterior spaces and walkable and non-walkable flat areas such as terraces, rooftops, balconies and yards. Ideal for vapour compensation on areas with a residual moisture $\leq 5\%$.

It is composed of a polymeric membrane of high-performance thermoplastic polyolefins CPE (EVA-based Circular Polymer), resulting from the transformation and treatment of raw materials of circular economy, and extruded on polyester fibres.

PRODUCT

Code	Product	Roll	m ² /Roll
596351714	ECODRY120 30	Roll of 1,5 m x 30 m	45 m²
596351721	ECODRY120 20	Roll of 1,5 m x 20 m	30 m²
596351738	ECODRY120 10	Roll of 1,5 m x 10 m	15 m²
596351745	ECODRY120 5	Roll of 1,5 m x 5 m	7,5 m²

FORMATS

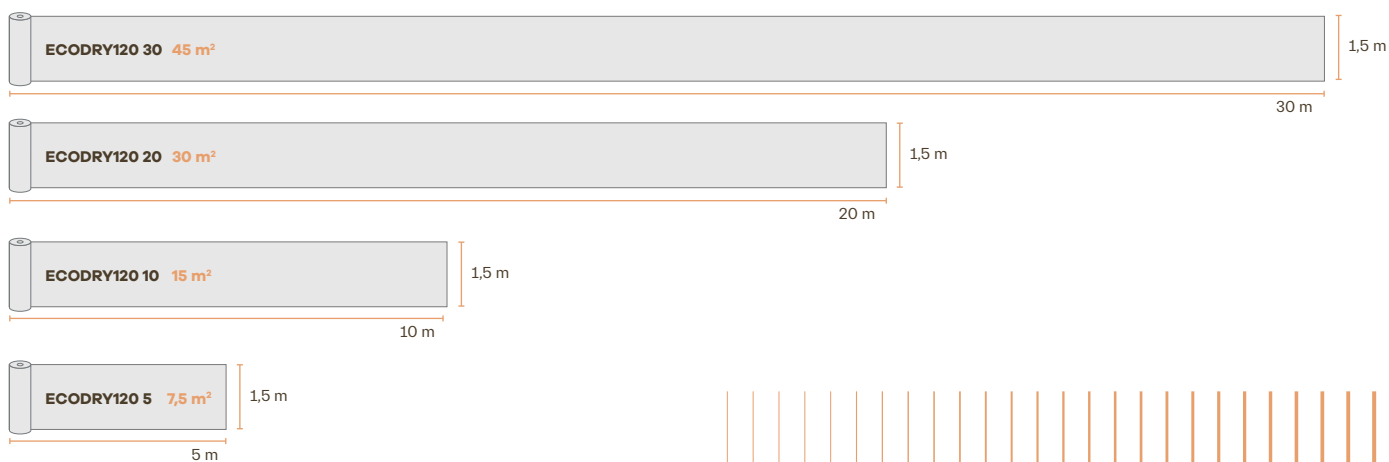

CHARACTERISTICS

Polyester fibres

CPE
(EVA-based
Circular Polymer)

Polypropylene fibres



WARRANTY
10 years




UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301



EN 13956:2012


INSTALLATION

WALKABLE AREAS with covering

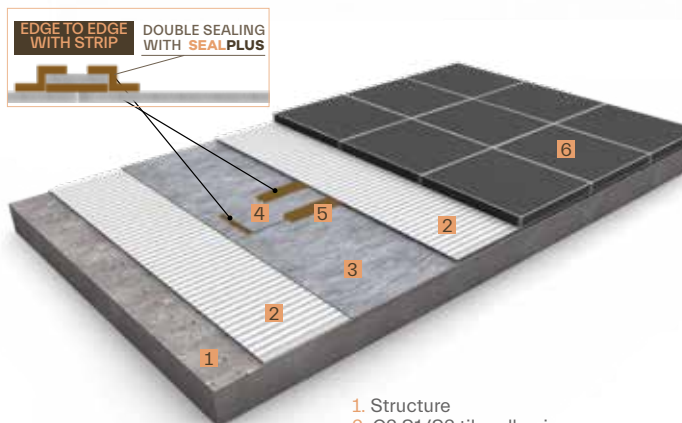

1. Structure
2. C2 S1/S2 tile adhesive
3. **ECODRY120** or **DRY120** membrane
4. **ECODRY BAND** strip for joints
5. **SEALPLUS** adhesive
6. Covering

NON WALKABLE AREAS with gravel

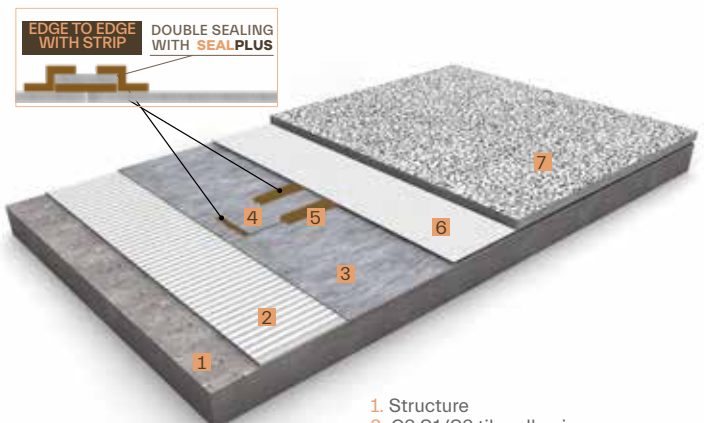

1. Structure
2. C2 S1/S2 tile adhesive
3. **ECODRY120** or **DRY120** membrane
4. **ECODRY BAND** strip for joints
5. **SEALPLUS** adhesive
6. Geotextile for protection
7. Gravel



INSTALLATION VIDEO

* System valid for





TECHNICAL DATA SHEET

Characteristics	Test	Unit	Tolerance	Value
Weight	EN 1849-2	g/m ²	MDV: -5% and + 10%	525
Thickness	EN 1849-2	mm	MDV: -5% and + 10%	1,25
Watertightness	EN 1928 Meth. B			PASS
Tensile strength	EN 12311-2 Meth. A	N/50 mm	MLV L ≥ 650 MLV T ≥ 500	L = 650 T = 500
Elongation	EN 12311-2 Meth. A	%	MLV L ≥ 39 MLV T ≥ 70	L = 39 T = 70
Resistance of overlaps (shear)	EN 12317-2	N/50 mm	MLV ≥ 420	420
Resistance to impact	EN 12691 Meth.A	mm	MLV ≤ 200	200
Resistance to static load	EN 12730 Meth.C	Kg	MLV ≥ 20	20
Folding at low temperature	EN 495-5	°C	MLV ≥ -40	-40
Reaction to fire	EN 13501-1	Euroclases		E
Length	EN 1848-2	m	MDV: -0% and +5%	5, 10, 20 and 30
Width	EN 1848-2	m	MDV: -0,5% and +1%	1,5
Visible defects	EN 1850-2	mm		PASS
Straightness	EN 1848-2	mm	MLV g ≤ 50	50
Flatness	EN 1848-2	mm	MLV p ≤ 10	10
Dimensional stability	EN 1107-2	%	MLV L ≤ -0,4 MLV T ≤ -0,3	L = -0,4 T = -0,3

MLV: Values established by manufacturer (during test).

MDV: Declared values by manufacturer (accompanied by tolerance).



BECAUSE IT IS VERY EASY TO INSTALL.

- ADHERED DIRECTLY TO THE STRUCTURE WITH TILE ADHESIVE.
- NO NEED TO REMOVE THE EXISTING OLD COVERING.
- DOES NOT REQUIRE COMPRESSION OR SEPARATION LAYER.
- DOES NOT REQUIRE ANY SPECIAL TOOLS.
- DURING INSTALLATION, WEATHER CONDITIONS DO NOT DETERIORATE THE PRODUCT.
- EASY EVEN FOR THE MOST CRITICAL POINTS.

BECAUSE IT DOES NOT INCREASE THE HEIGHT IN THE WORK.

- SINCE IT HAS THE MINIMUM THICKNESS: 1,25 MM.
- DOES NOT NEED A COMPRESSION LAYER.

BECAUSE IT IS A HIGH-PERFORMANCE MEMBRANE.

- VERY HIGH ADHESION CAPACITY TO THE SUBSTRATE.
- IT IS A VAPOR BARRIER GUARANTEEING ABSOLUTE WATERTIGHTNESS AGAINST WATER AND WATER VAPOUR.
- DESIGNED TO DRAIN RESIDUAL MOISTURE Laterally THROUGH THE GEOTEXTILE OF ITS REAR FACE; THUS, AVOIDING THE CREATION OF BUBBLES AND FACILITATING THE QUICK DRYING OF ADHESIVE AND STRUCTURE.
- IT KEEPS THE SUBSTRATE DRY, WHICH PREVENTS ITS DEGRADATION.
- INDICATED FOR ANY PROTECTED SURFACE AND A SPECIAL USE: FINISHED IN MICROCEMENT.

BECAUSE IT IS ADAPTABLE.

- EASY TO MANIPULATE AND ADAPTS TO IRREGULAR SHAPES.
- ALLOWS A PERFECT FINISH IN ANGLES, CORNERS AND VERTICAL MEETING POINTS.

BECAUSE IT ALLOWS FINISHINGS IN MICROCEMENT

- IN ADDITION TO BEING A MEMBRANE INDICATED FOR ANY PROTECTED SURFACE, IT IS PERFECT FOR A VERY SPECIAL USE OF GREAT CURRENT TREND: MICROCEMENT FLOORS.
IN ORDER TO DO THIS BEFORE APPLYING THE MICROCEMENT SYSTEM IT IS NECESSARY TO EXTEND A 3 MM LAYER OF C2 S1 TILE ADHESIVE ON THE MEMBRANE.

BECAUSE IT IS SAFER THAN OTHER SYSTEMS.

- AVOIDS THE APPEARANCE OF CRACKS.
- PREVENTS THE APPEARANCE OF HUMIDITIES.
- PREVENTS MOLD, BACTERIA AND HERBS.
- GUARANTEES A LASTING PROTECTION OF THE INSTALLATIONS.

FOR ITS PROFITABILITY: SAVES TIME AND MONEY.

- THE EXTREME SPEED OF INSTALLATION SHORTENS THE TIMES AND THE LABOR FORCE.
- IN REFURBISHMENT, WE SAVE THE COST OF REMOVING THE PREVIOUS COVERING AND OF THE INSTALLATION OF A COMPRESSION LAYER.
- ONCE INSTALLED IT DOES NOT REQUIRE MAINTENANCE THROUGHOUT ITS LIFESPAN.
- WE SAVE EXTRA COSTS DERIVED FROM FUTURE INFILTRATION PROBLEMS.

BECAUSE IT IS SUSTAINABLE.

- IT IS ECOLOGICALLY RESPECTFUL SINCE IT IS THE RESULT OF TRANSFORMATION AND TREATMENT OF RAW MATERIALS OF CIRCULAR ECONOMY.
- IT HAS A LONG LIFESPAN.
- IT IS 100% RECYCLABLE.





1. Check the stability of the structure and clean the surface. Then apply C2 S1/S2 tile adhesive with a 6/8 mm notched trowel. Apply the adhesive on small patches to prevent drying and always in the same direction. Do not install the membrane on semi-set adhesive.
NOTE: In refurbishment, apply C2 S1/S2 tile adhesive directly on the old covering.



2. Press the membrane hard on the structure with the help of a plastic trowel making sure to eliminate all possible air bubbles. ATTENTION: Once installed, it should be checked that the membrane is totally adhered to the structure.



3. With a spatula, remove the excess of adhesive.



membranes
edge
to edge
with
adhesive

4. Place the membranes edge to edge and extend the special **SEALPLUS** adhesive. Due to the thickness of the adhesive, use a not-notched trowel or spatula, to favour the coating of the entire surface of the joint.




5. Seal the joints with **ECODRY BANDA 13 X 30**.



6. Make a double seal on the edges of the strip with adhesive **SEALPLUS**. OPTIONAL: Once the installation is finished, with waiting time of 48 hours, a precise watertightness test can be performed.



7. Install the flooring tiles directly with C2 S1/S2 adhesive and fix the skirting.

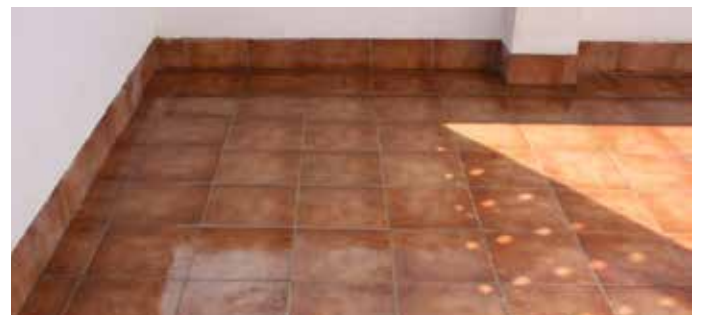

8. Quick, easy and high-quality work.

***SEALPLUS**: For its application, the use of gloves is recommended.

revestech®

A person is standing in the rain, holding a large brown umbrella. The person is wearing a long, patterned skirt. The background is dark and blurry, suggesting a rainy outdoor setting. The umbrella is covered in raindrops, and water is dripping from its edge. The overall mood is serene and protective.

**RESISTANT
TO HIGH
HUMIDITY**
WATERTIGHTNESS
GUARANTEED

ECODRY80

WATERPROOFING AND
UNCOUPLING OF
ROOFS
TERRACES
ROOFTOPS
BALCONIES
YARDS
ROOF GARDENS


Eco-responsible membrane for the waterproofing and uncoupling under protection of exterior spaces and walkable flat areas and non-walkable areas such as terraces, rooftops, balconies, yards and roof gardens.

It is composed of a polymeric membrane of high-performance thermoplastic polyolefins CPE (EVA-based Circular Polymer), resulting from the transformation and treatment of raw materials of circular economy, and extruded on polyester fibres.

PRODUCT

Code	Product	Roll	m ² /roll
596351875	ECODRY80 30	Roll of 1,5 m x 30 m	45 m²
596351882	ECODRY80 20	Roll of 1,5 m x 20 m	30 m²
596351899	ECODRY80 10	Roll of 1,5 m x 10 m	15 m²
596351905	ECODRY80 5	Roll of 1,5 m x 5 m	7,5 m²

FORMATS

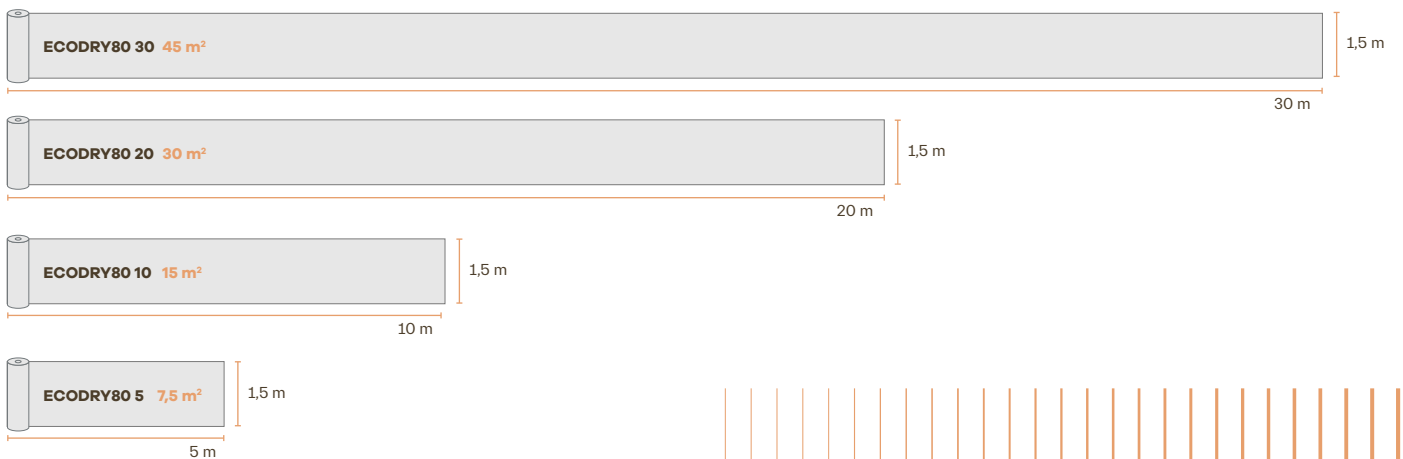

CHARACTERISTICS

Polyester fibres

CPE
(EVA-based
Circular Polymer)

Polyester fibres



WARRANTY
10 years

EPD®


UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301



EN 13956:2012


INSTALLATION

WALKABLE AREAS with covering

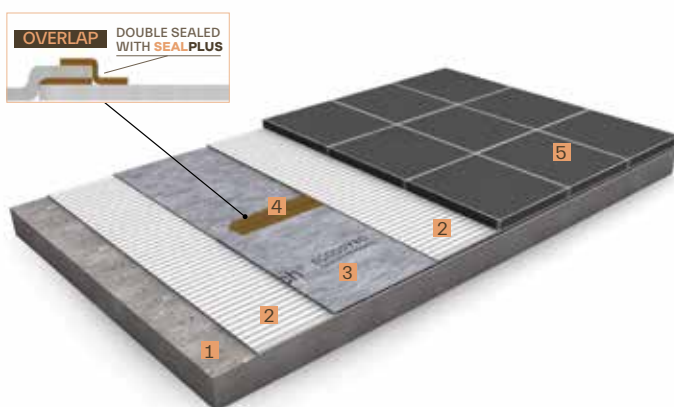

1. Structure
2. C2 S1/S2 tile adhesive
3. **ECODRY80** or **DRY80** membrane
4. **SEALPLUS** adhesive
5. Covering

NON WALKABLE AREAS with gravel

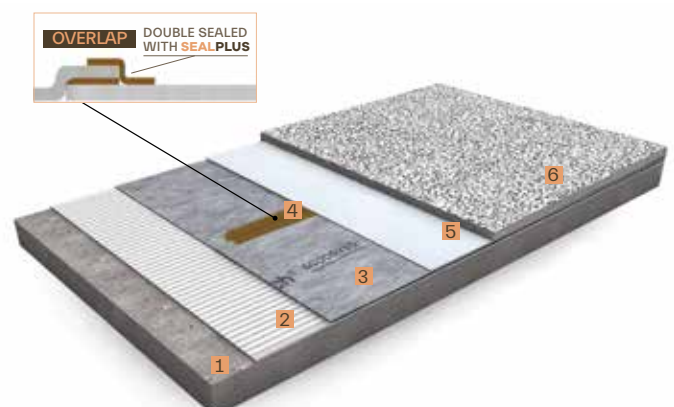

1. Structure
2. C2 S1/S2 tile adhesive
3. **ECODRY80** or **DRY80** membrane
4. **SEALPLUS** adhesive
5. Geotextile for protection
6. Gravel



INSTALLATION VIDEO

* System valid for



TECHNICAL DATA SHEET

Characteristics	Test	Unit	Tolerance	Value
Weight	EN 1849-2	g/m ²	MDV: -5% and + 10%	625
Thickness	EN 1849-2	mm	MDV: -5% and + 10%	0,80
Watertightness	EN 1928 Meth. B			PASS
Tensile strength	EN 12311-2 Meth. A	N/50 mm	MLV L ≥ 800 MLV T ≥ 300	L = 800 T = 300
Elongation	EN 12311-2 Meth. A	%	MLV L ≥ 27 MLV T ≥ 230	L = 27 T = 230
Resistance of overlaps (shear)	EN 12317-2	N/50 mm	MLV ≥ 770	770
Resistance to impact	EN 12691	mm	MLV ≤ 200	200
Resistance to static load	EN 12730 Meth. B	Kg	MLV ≥ 20	20
Resistance to root perforation	UNE-CEN/TS 14416 EX		Without perforations	no perforations or cracks were observed in the tested specimens.
Folding at low temperature	EN 495-5	°C	MLV ≥ -40	-40
Reaction to fire	EN 13501-1	Euroclases		E
Length	EN 1848-2	m	MDV: -0% and +5%	5, 10, 20 and 30
Width	EN 1848-2	m	MDV: -0,5% and +1%	1,5
Visible defects	EN 1850-2	mm		PASS
Straightness	EN 1848-2	mm	MLV g ≤ 50	50
Flatness	EN 1848-2	mm	MLV p ≤ 10	10
Dimensional stability	EN 1107-02	%	MLV L ≤ -0,2 MLV T ≤ -0,5	L = -0,2 T = -0,5

MLV: Values established by manufacturer (during test).

MDV: Declared values by manufacturer (accompanied by tolerance).



**WARRANTY
10 years**



BECAUSE IT IS VERY EASY TO INSTALL.

- ADHERED DIRECTLY TO THE STRUCTURE WITH TILE ADHESIVE.
- NO NEED TO REMOVE THE EXISTING OLD COVERING.
- DOES NOT REQUIRE COMPRESSION OR SEPARATION LAYER.
- DOES NOT REQUIRE ANY SPECIAL TOOLS.
- DURING INSTALLATION, WEATHER CONDITIONS DO NOT DETERIORATE THE PRODUCT.
- EASY EVEN FOR THE MOST CRITICAL POINTS.

BECAUSE IT DOES NOT INCREASE THE HEIGHT IN THE WORK.

- SINCE IT HAS THE MINIMUM THICKNESS: 0,8 MM.
- DOES NOT NEED A COMPRESSION LAYER.

BECAUSE IT IS A HIGH-PERFORMANCE MEMBRANE.

- IT IS A VAPOR BARRIER GUARANTEEING ABSOLUTE WATERTIGHTNESS AGAINST WATER AND WATER VAPOUR.
- IT KEEPS THE SUBSTRATE DRY, WHICH PREVENTS ITS DEGRADATION.

BECAUSE IT IS ADAPTABLE.

- EASY TO MANIPULATE AND ADAPTS TO IRREGULAR SHAPES.
- ALLOWS A PERFECT FINISH IN ANGLES, CORNERS AND VERTICAL MEETING POINTS.

BECAUSE IT IS SAFER THAN OTHER SYSTEMS.


- AVOIDS THE APPEARANCE OF CRACKS.
- PREVENTS THE APPEARANCE OF HUMIDITIES.
- PREVENTS MOLD, BACTERIA AND HERBS.
- GUARANTEES A LASTING PROTECTION OF THE INSTALLATIONS.

FOR ITS PROFITABILITY: SAVES TIME AND MONEY.

- THE EXTREME SPEED OF INSTALLATION SHORTENS THE TIMES AND THE LABOR FORCE.
- IN REFURBISHMENT, WE SAVE THE COST OF REMOVING THE PREVIOUS COVERING AND OF THE INSTALLATION OF A COMPRESSION LAYER.
- ONCE INSTALLED IT DOES NOT REQUIRE MAINTENANCE THROUGHOUT ITS LIFESPAN.
- WE SAVE EXTRA COSTS DERIVED FROM FUTURE INFILTRATION PROBLEMS.

BECAUSE IT IS SUSTAINABLE.

- IT IS ECOLOGICALLY RESPONSIBLE SINCE IT IS THE RESULT OF TRANSFORMATION AND TREATMENT OF RAW MATERIALS OF CIRCULAR ECONOMY.
- IT HAS A LONG LIFESPAN.
- IT IS 100% RECYCLABLE.





1. Check the stability of the structure and clean the surface. Then apply C2 S1/S2 tile adhesive with a 6/8 mm notched trowel. Apply the adhesive on small patches to prevent drying and always in the same direction. Do not install the membrane on semi-set adhesive. **NOTE:** In refurbishment, apply C2 S1/S2 tile adhesive directly on the old covering.

2. Press the membrane hard on the structure with the help of a plastic trowel making sure to eliminate all possible air bubbles. **ATTENTION:** Once installed, it should be checked that the membrane is totally adhered to the structure.



3. With a spatula, remove the excess of adhesive.

4. Leave a 10 cm overlap between the membranes and apply **SEALPLUS*** between the overlap. We can use both the 6 kg pot, as well as the 600 ml blister applied with glue gun.



Membranes
overlapped
with
adhesive



1st between layers.

2° On top (double sealing).



5. With a spatula extend the **SEALPLUS*** adhesive to distribute it correctly. Apply a first layer between membranes (1°). Finish off the joint with **SEALPLUS*** adhesive (2°): Double sealing.

6. Install the flooring tiles directly with C2 S1/S2 adhesive and fix the skirting. Quick, easy and high quality work.

OPTIONAL: Once the installation is finished, with a waiting time of 48 hours, a precise watertightness test can be performed.

note!

For finishes in **non-walkable areas with gravel**, the system of installation of the **ECODRY80** membrane is identical to the previous explanation up to point 5. The only difference is that once we have made the joints (point 4), we will place an **xps thermal insulation and a protective geotextile** between the membrane and the gravel.



***SEALPLUS:** For its application, the use of gloves is recommended.

ECODRY80*/DRY80/ECODRY120/DRY120*

GREEN ROOFS SUSTAINABLE AND WELL WATERPROOFED

ARTIFICIAL GRASS | NATURAL VEGETATION



Flat, non-walkable green roofs, whether protected with artificial grass or natural vegetation. These roofs facilitate the drainage of rainwater, significantly reducing runoff and providing major environmental benefits, as well as enhancing comfort for building users. From an energy efficiency perspective, green roofs act as excellent thermal insulators, significantly lowering the energy required to regulate indoor temperatures.


The **ECODRY120** membrane waterproofing system is perfectly compatible with this type of protection, requiring only a minimal number of additional layers.

In compliance with current regulations and the Technical Building Code, roofs protected with natural vegetation must meet the following requirements:

*The roof slope must be between 1% and 5%.


*Immediately beneath the natural vegetation, a special nodular drainage layer for natural grass must be installed. This layer can be placed directly on top of the waterproofing system made up of **ECODRY120** membranes.

CONVENTIONAL GREEN ROOF

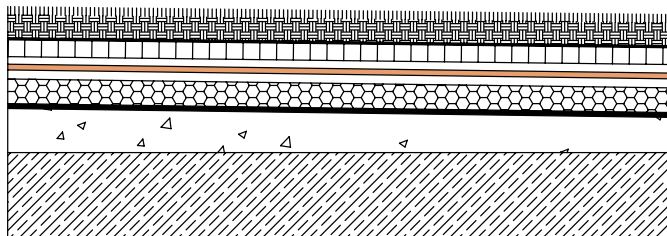

1. Natural grass
2. Filter layer
3. Drainage layer - Nodular membrane
4. Tile adhesive
5. **DRY/ECODRY 80/120** membrane
6. Tile adhesive
7. Compression layer
8. Thermal insulation
9. Vapor barrier
10. Slope formation
11. Structural support

INVERTED GREEN ROOF

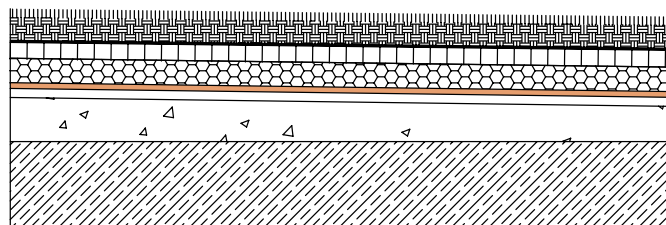

1. Natural grass
2. Filter layer
3. Drainage layer - Nodular membrane
4. Thermal insulation
5. **DRY/ECODRY 80/120** membrane
6. Tile adhesive
7. Slope formation
8. Structural support



ARTIFICIAL GRASS




NATURAL VEGETATION



revestech®

**SAFE
HOMES**
WITH MAXIMUM
RELIABLE SYSTEMS

ECODRY50

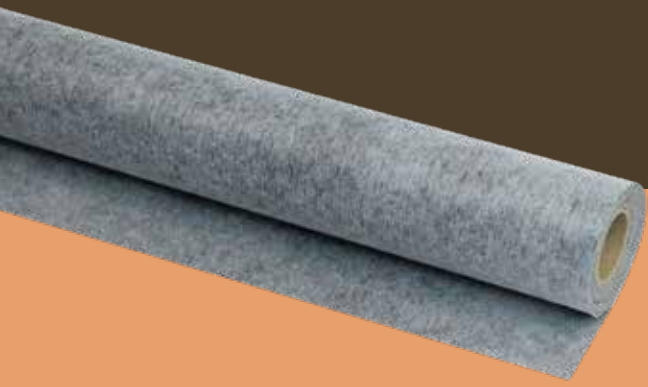

**WATERPROOFING OF
TERRACES UP TO 50 m²
BALCONIES
WINDOWSILLS
CORNICES
INTERIORS
WET AREAS**


Eco-responsible membrane for waterproofing under flooring of small flat walkable areas (balconies and terraces) and of baths, walls and floors in indoor wet areas.

It is composed of a polymeric membrane of high-performance thermoplastic polyolefins CPE (EVA-based Circular Polymer), resulting from the transformation and treatment of raw materials of circular economy, and extruded on polyester fibres.

PRODUCT

Code	Product	Roll	m ² /roll
596351752	ECODRY50 450	Roll of 1,5 m x 30 m	45 m²
596351851	ECODRY50 30	Roll of 1,2 m x 30 m	36 m²
596351769	ECODRY50 75	Roll of 1,5 m x 5 m	7,5 m²
596351868	ECODRY50 5	Roll of 1,2 m x 5 m	6 m²

FORMATS

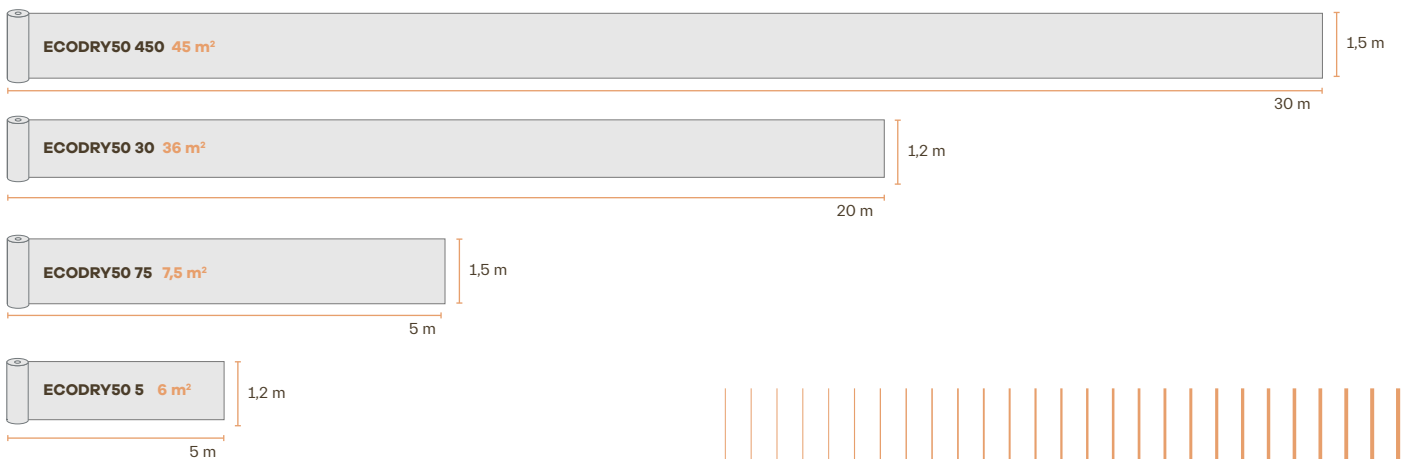

CHARACTERISTICS

Polyester fibres

CPE
(EVA-based
Circular Polymer)

Polyester fibres



WARRANTY
10 years

EPD®


UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301



EN 13956:2012

INSTALLATION

balconies, windowsills and cornices with covering

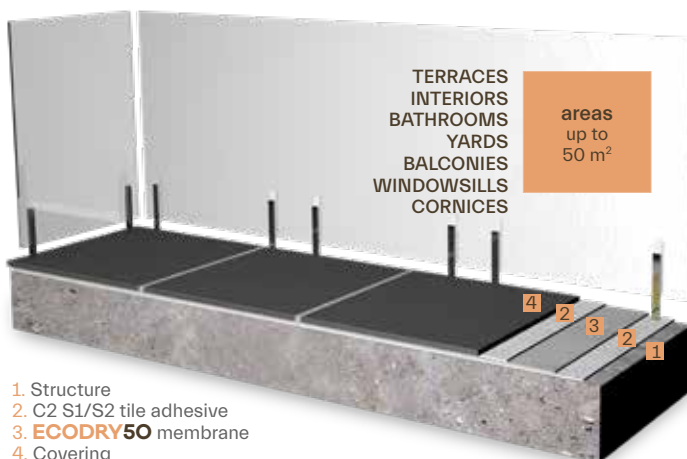

1. Structure
2. C2 S1/S2 tile adhesive
3. **ECODRY50** membrane
4. Covering

interiors and wet areas with covering



1. Structure/wall
2. C2 S1/S2 tile adhesive
3. **ECODRY50** membrane
4. **SEALPLUS** special adhesive for joints
5. **ECODRY CORNERIN** waterproofing reinforcement for angles
6. Covering



INSTALLATION VIDEO

* System valid for



TECHNICAL DATA SHEET

Characteristics	Test	Unit	Tolerance	Values
Weight	EN 1849-2	g/m ²	MDV: -5 % and + 10 %	335
Thickness	EN 1849-2	mm	MDV: -5 % and + 10 %	0,52
Watertightness	EN 1928 Meth. B			PASS
Tensile strength	EN 12311-2 Meth. A	N/50 mm	MLV L ≥ 450 MLV T ≥ 150	L = 450 T = 150
Elongation	EN 12311-2 Meth. A	%	MLV L ≥ 25 MLV T ≥ 200	L = 25 T = 200
Resistance of overlaps (shear)	EN 12317-2	N/50 mm	MLV ≥ 600	600
Resistance to impact	EN 12691	mm	MLV T ≥ 200	200
Resistance to static load	EN 12730 Meth. B	Kg	MLV ≥ 20	20
Folding at low temperature	EN 495-5	°C	MLV ≥ 40	-40
Reaction to fire	EN 13501-1	Euroclases		E
Length	EN 1848-2	m	MDV: -0 % and +5 %	5 y 30
Width	EN 1848-2	m	MDV: -0,5 % and + 1 %	1, 1,2 and 1,5
Visible defects	EN 1850-2			PASS
Straightness	EN 1848-2	mm	MLV g ≤ 50	50
Flatness	EN 1848-2	mm	MLV p ≤ 10	10
Dimensional stability	EN 1107-02	%	MLV L ≤ -0,2 MLV T ≤ -0,7	L = -0,2 T = -0,7

MLV: values established by manufacturer (during test).

MDV: declared values by manufacturer (accompanied by tolerance).



BECAUSE IT IS VERY EASY TO INSTALL.

- ADHERED DIRECTLY TO THE STRUCTURE WITH TILE ADHESIVE.
- NO NEED TO REMOVE THE EXISTING OLD COVERING.
- DOES NOT REQUIRE COMPRESSION OR SEPARATION LAYER.
- DOES NOT REQUIRE ANY SPECIAL TOOLS.
- DURING INSTALLATION, WEATHER CONDITIONS DO NOT DETERIORATE THE PRODUCT.
- EASY EVEN FOR THE MOST CRITICAL POINTS.

BECAUSE IT DOES NOT INCREASE THE HEIGHT IN THE WORK.

- SINCE IT HAS THE MINIMUM THICKNESS: 0,52 MM
- DOES NOT NEED A COMPRESSION LAYER.

BECAUSE IT IS A HIGH-PERFORMANCE MEMBRANE.

- IT IS A VAPOR BARRIER GUARANTEEING ABSOLUTE WATERTIGHTNESS AGAINST WATER AND WATER VAPOUR.
- IT KEEPS THE SUBSTRATE DRY, WHICH PREVENTS ITS DEGRADATION.

BECAUSE IT IS EXTREMELY LIGHT AND ADAPTABLE.

- EASY TO MANIPULATE BECAUSE OF ITS LIGHTNESS.
- IT HAS AN EXTRAORDINARY PLASTICITY AND MALLEABILITY.
- ADAPTS TO THE IRREGULAR SHAPES IN THE SURFACE.
- ALLOWS A PERFECT FINISH IN ANGLES, CORNERS AND VERTICAL MEETING POINTS.
- IT HAS HIGH SEALING PROPERTIES, BEING VERY EFFECTIVE FOR JOINTS AND MEETING POINTS..

BECAUSE IT IS SAFER THAN OTHER SYSTEMS.


- PREVENTS THE APPEARANCE OF HUMIDITIES.
- PREVENTS MOLD, BACTERIA AND HERBS.
- GUARANTEES A LASTING PROTECTION OF THE INSTALLATIONS.

FOR ITS PROFITABILITY: SAVES TIME AND MONEY.

- THE EXTREME SPEED OF INSTALLATION SHORTENS THE TIMES AND THE LABOR FORCE.
- IN REFURBISHMENT, WE SAVE THE COST OF REMOVING THE PREVIOUS COVERING AND OF THE INSTALLATION OF A COMPRESSION LAYER.
- ONCE INSTALLED IT DOES NOT REQUIRE MAINTENANCE THROUGHOUT ITS LIFESPAN.
- WE SAVE EXTRA COSTS DERIVED FROM FUTURE INFILTRATION PROBLEMS.

BECAUSE IT IS SUSTAINABLE.

- IT IS ECOLOGICALLY RESPECTFUL SINCE IT IS THE RESULT OF TRANSFORMATION AND TREATMENT OF RAW MATERIALS OF CIRCULAR ECONOMY.
- IT HAS A LONG LIFESPAN.
- IT IS 100% RECYCLABLE.





1. Check the stability of the structure and clean the surface. Then apply C2 S1/S2 tile adhesive with a 6/8 mm notched trowel. Apply the adhesive on small patches to prevent drying and always in the same direction. Do not install the membrane on semi-set adhesive. **NOTE:** In refurbishment, apply C2 S1/S2 tile adhesive directly on the old covering.

2. Press the membrane hard on the structure with the help of a plastic trowel making sure to eliminate all possible air bubbles. **ATTENTION:** Once installed, it should be checked that the membrane is totally adhered to the structure.



3. With a spatula, remove the excess of adhesive.

4. Leave a 10 cm overlap between the membranes and apply **SEALPLUS*** between the overlap. We can use both the 6 kg pot, as well as the 600 ml blister applied with glue gun.



5. With a spatula extend the **SEALPLUS*** adhesive to distribute it correctly. Apply a first layer between membranes (1°). Finish off the joint with **SEALPLUS*** adhesive (2°): Double sealing.

OPTIONAL: Once the installation is finished, with a waiting time of 48 hours, a precise watertightness test can be performed.



6. Install the flooring tiles directly with C2 S1/S2 adhesive and fix the skirting. Quick, easy and high quality work.

***SEALPLUS:** For its application is recommended the use of gloves.

INSTALLATION IN BATHROOMS AND WET AREAS

ECODRY50



1. Connect the drain to the pipe and form the slopes, protecting the interior with the red cover that we will then remove.



4mm
notched
trowel

The membrane
should go
up the wall a
minimum of
10 cm

2. Clean carefully removing all debris from the structure. Apply a thin layer of C2 S1/S2 adhesive using a 4mm notched trowel.



3. Place the **ECODRY50** membrane on top of the adhesive, going up the wall a minimum of 10 cm.




4. Check that the membrane is well extended and get rid of the air, that may have been generated, with the help of a plastic trowel.



5. Extend a thin layer of C2 S1/S2 tile adhesive with the 4 mm trowel and cover the wall with the **ECODRY50** membrane overlapping the membranes at least 5 cm.



6. Press the membrane using a plastic trowel to get rid of the air that may have been generated.

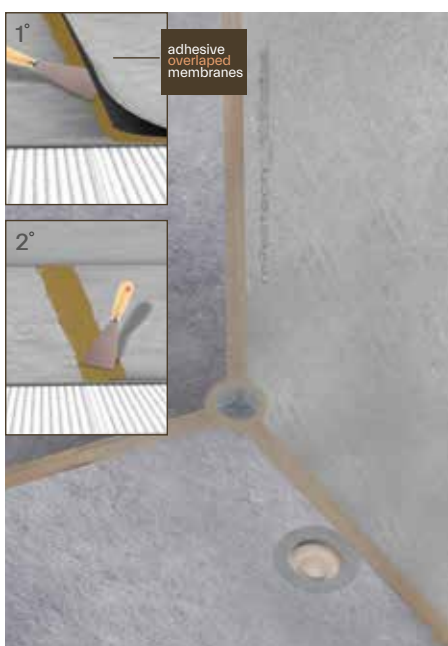

1°
adhesive
overlapped
membranes

2°

7. Make the joints with **SEALPLUS** adhesive. Apply a first layer between membranes (1°). Then finish with a layer of **SEALPLUS** adhesive on top of the joint (2°): double sealing. For a perfect finish use the precast pieces **ECODRY CORNERIN** and **ECODRY CORNEROUT**.



8. After the adhesive is dry, reapply C2 S1/S2 tile adhesive directly on the membrane. Proceed to the installation of the grate included in the kit and the tiles chosen as final covering.



9. Shower finished.


***SEALPLUS**: For its application is recommended the use of gloves.

FINISH CORNERS

The corners should be made as reinforcement to the waterproofing, and installed on the finish membrane of the vertical structure, using the **ECODRY CORNERIN/CORNEROUT** preformed angles fixed with **SEALPLUS** adhesive for joints.



1. Once installed the **ECODRY50/80/120** membrane apply adhesive **SEALPLUS** on the corner area.

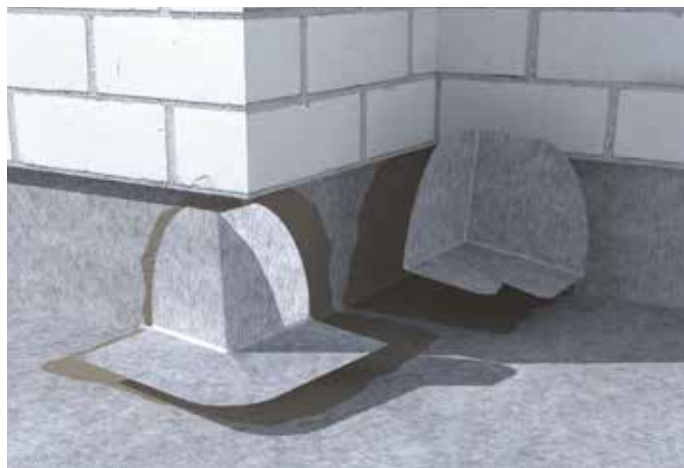

2. Place the **ECODRY CORNERIN/CORNEROUT** piece on top of the **SEALPLUS** adhesive that we applied previously.



3. Reapply **SEALPLUS** adhesive on the **ECODRY CORNERIN/CORNEROUT** joints making a double sealing.



ECODRY CORNERIN




ECODRY CORNEROUT

STRUCTURAL EXPANSION JOINTS

During the installation of the **ECODRY80/50** the expansion joints of the resistant structure or structural joints and the expansion joints of the covering must be treated. For its realization we must take into account the following:

1. Place a reinforcement with **ECODRY BAND 30X30**, leaving a space of at least 2 cm centred on the joint. Adhere the strip to the structure with C2 S1/S2 tile adhesive.
2. Waterproof with **ECODRY120/80/50** membrane just to the edge of the joint.
3. As finish, cover with **ECODRY BAND 30X30**, leaving a space of at least 3 cm centred on the joint with the help of an expansion cord.
4. **VERY IMPORTANT.** All the joints between the strips and the membrane must be made with **SEALPLUS** adhesive.

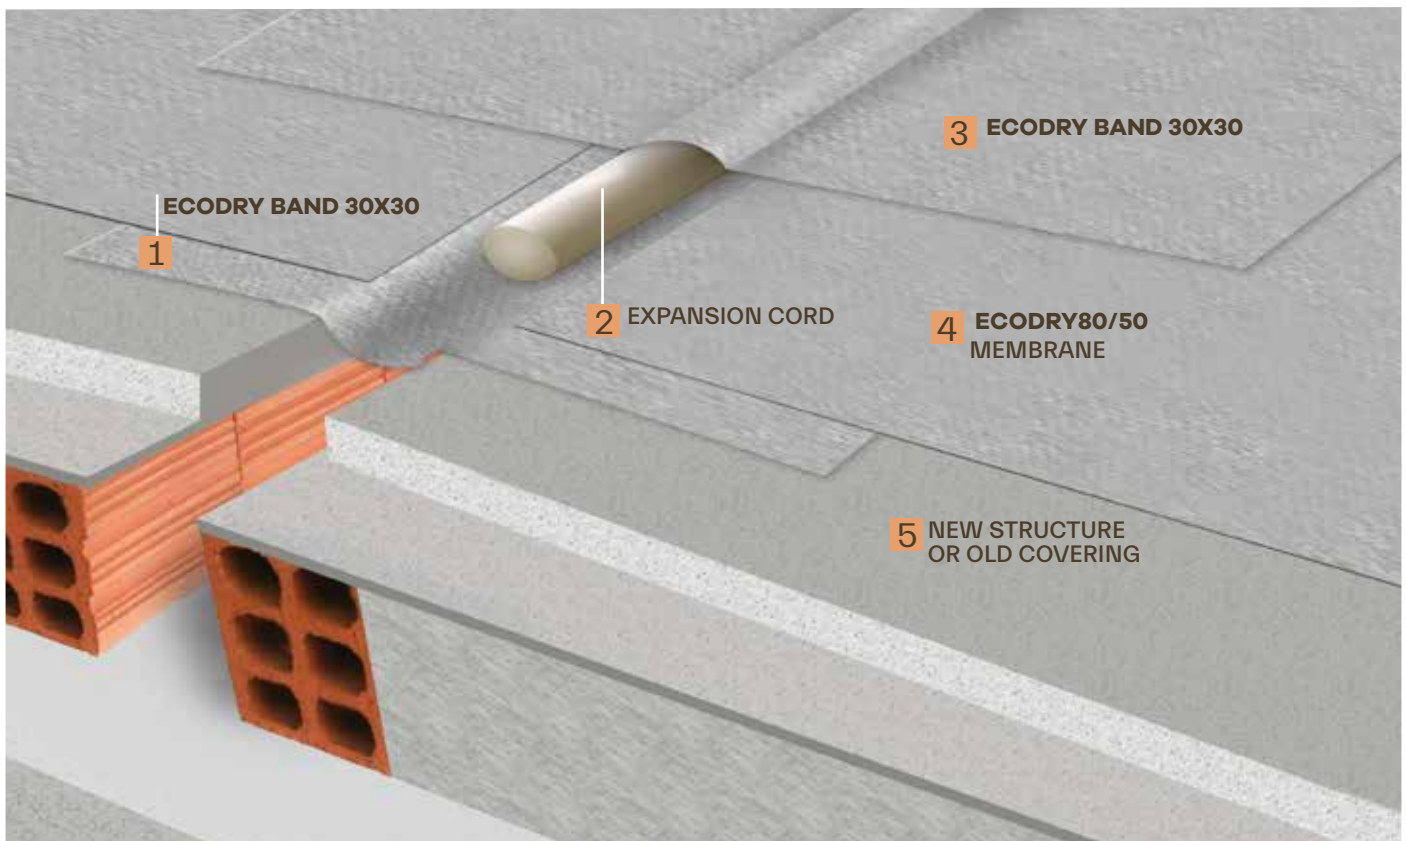

- 1 & 3. **ECODRY BAND 30X30** strip.
2. Expansion cord.
4. **ECODRY80/50** membrane.
5. New structure or old covering.

* For installing the expansion joints with **ECODRY120** membrane, please refer to the technical manual downloadable at www.revestech.com



ECODRY120



ECODRY80



ECODRY50




ECODRY BAND 30X30


MEETING POINTS WITH VERTICAL STRUCTURES

A. ECODRY120/80/50 membrane.

Due to the flexibility of the **ECODRY120/80/50** membrane, in most cases it is not necessary to use strips on the meeting points with vertical structures, unlike other systems, the ease to assemble and adhere the **ECODRY120/80/50** membrane on the structures, allows us a perfect finish, faster and safer.

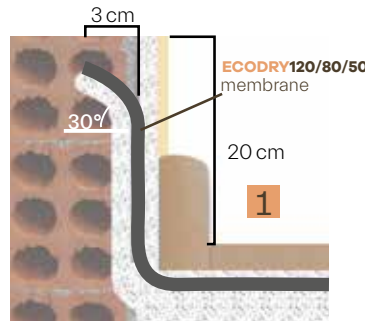


OPTION 1: Scratching: Insert the membrane making a scratch on the wall.

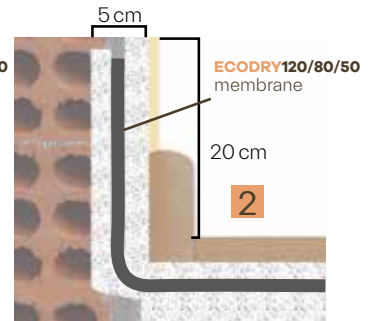


OPTION 2: Recess: Insert the membrane inside the wall making a recess.

B. ECODRY120/80/50 membrane and ECODRY BAND.


Sometimes, due to the shape of the surface, it is necessary to use perimeter strips to facilitate the installation of the **ECODRY120/80/50** membrane at the meeting points with the vertical structures. In this case, for the joint between the **ECODRY BAND** and the membrane, **SEALPLUS** joint adhesive will be used.

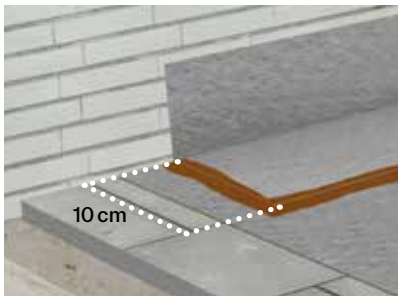

Place the perimeter strip **ECODRY BAND** respecting the height of skirting and leaving no less than 10 cm of overlap on the membrane.

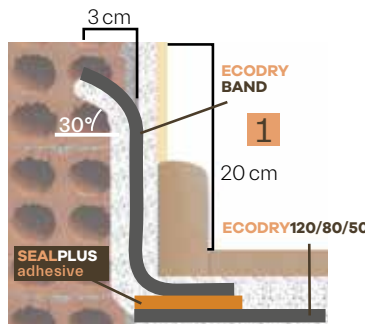

OPTION 1: Scratching: Insert the strip making a scratch on the wall.

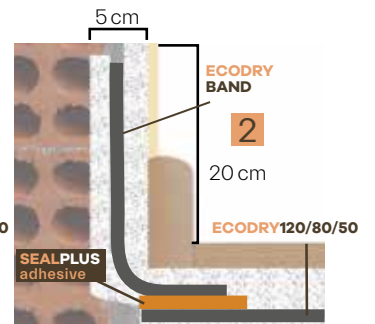

OPTION 2: Recess: Insert the strip inside the wall making a recess.



ECODRY120



ECODRY80



ECODRY50




ECODRY BANDA 30X30

HORIZONTAL EVACUATION


The great versatility of the **ECODRY** systems, allows us to install **ECODRY RAIN SPOUT** at the lowest evacuation point of the slope, in a quick and simple manner, guaranteeing total watertightness. Given the flexibility of Revestech membranes, the **ECODRY RAIN SPOUT** is installed directly on the **ECODRY120/80/50** membrane previously adhered to the perimeter, sealing the joint between both with **SEALPLUS*** special adhesive.

A. Installation of **ECODRY RAIN SPOUT** on **ECODRY120/80/50** membrane.

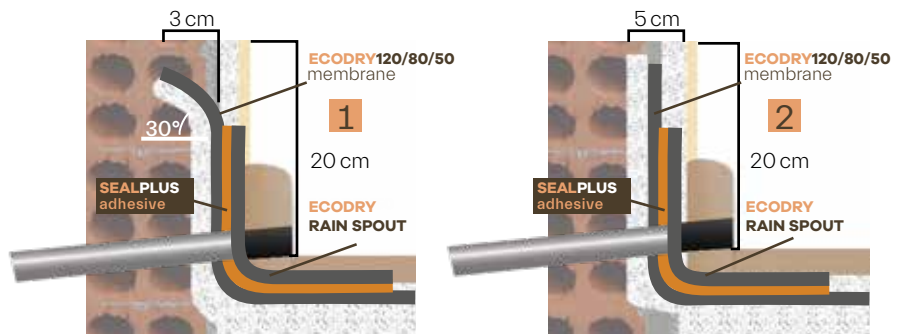

Insert the pipe into the horizontal outlet of the wall, making a hole in the **ECODRY120/80/50** membrane.

B. Installation of **ECODRY RAIN SPOUT** on **ECODRY BAND** perimeter strip.

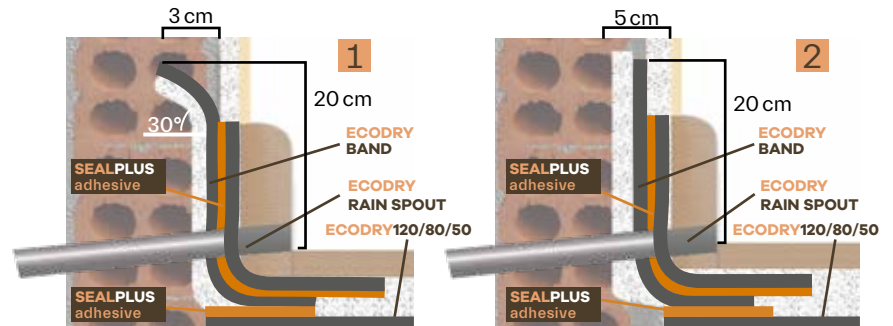


Insert the pipe into the horizontal outlet of the wall, making a hole in the **ECODRY BAND** strip.



DRAINS FOR OUTSIDE AREAS


Installation **ECODRY SUMI56** with **ECODRY80/50** waterproofing membrane.

Install the **ECODRY SUMI56** drain with 75X75 cm heat-sealed membrane, and over waterproof with **ECODRY80/50** membrane. The joint between membranes is made with **SEALPLUS*** adhesive with a minimum overlap of 10 cm.

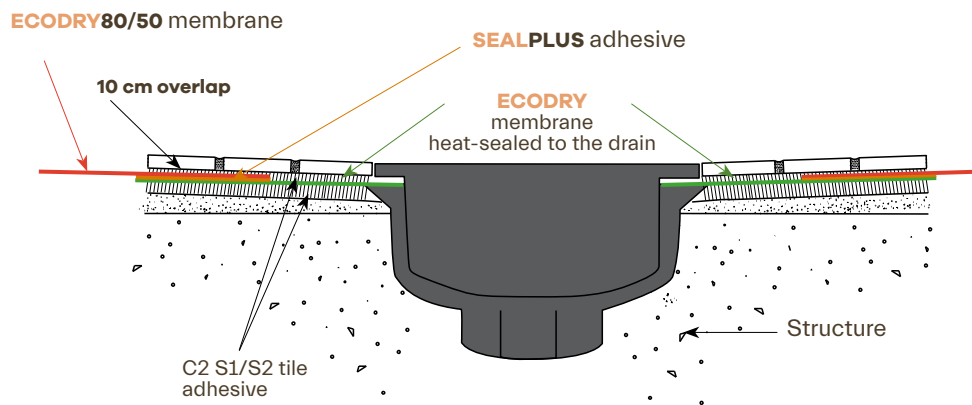

Installation **ECODRY SUMI56** with **ECODRY120** waterproofing membrane.

Waterproof the surface with **ECODRY120** membrane, and make a cut to install the **ECODRY SUMI56** drain with 75x75cm heat-sealed membrane. The joint between membranes is made with **SEALPLUS*** adhesive with a minimum overlap of 10 cm.

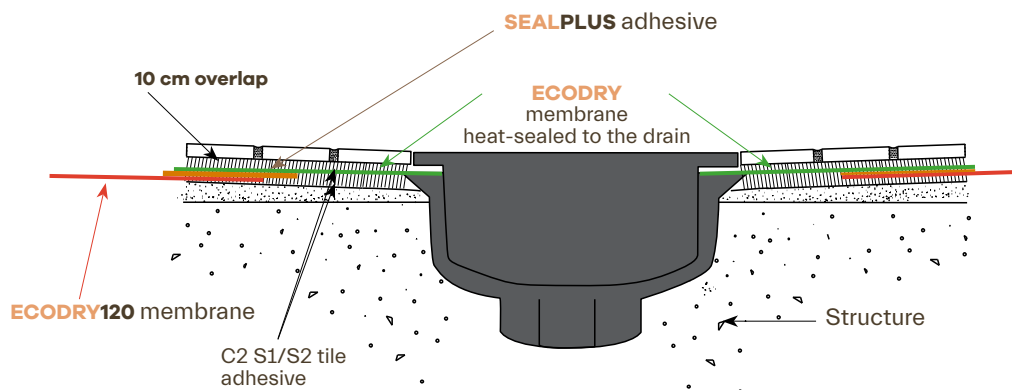

ECODRY120



ECODRY80



ECODRY50



ECODRY SUMI56

TYPE OF ADHESIVE TO APPLY DEPENDING ON THE SUBSTRATE


IMPORTANT: Given the variety of tiles adhesives classified as C2 S1/S2, it is essential to check on the manufacturer's technical data sheet, that it is compatible with both the structure and the finishing material, and also, that it adapts to the particular conditions of the work. Revestech declines all responsibility if the adhesives used are not suitable.



	ECODRY50 MEMBRANE	ECODRY80 MEMBRANE	ECODRY120 MEMBRANE
CERAMIC TILES			
WATERPROOFING MORTARS			
UNDERFLOOR HEATING			
CEMENT-BASED FLOORS			
CONCRETE			
LAMINATED PLASTER			
PIECES OF FIBRECEMENT			
PLASTER AND ANHYDRITE			
CELLULAR CONCRETE			
BRICK			
CEMENT AND LIMESTONE RENDER			
INSULATING PANELS AND ANTI-IMPACT MEMBRANES			
WOOD			
METAL/ALUMINUM			
PVC			
OVERLAPS BETWEEN MEMBRANES			NO
OVERLAPS WITH BAND			

4

UNCOUPLING

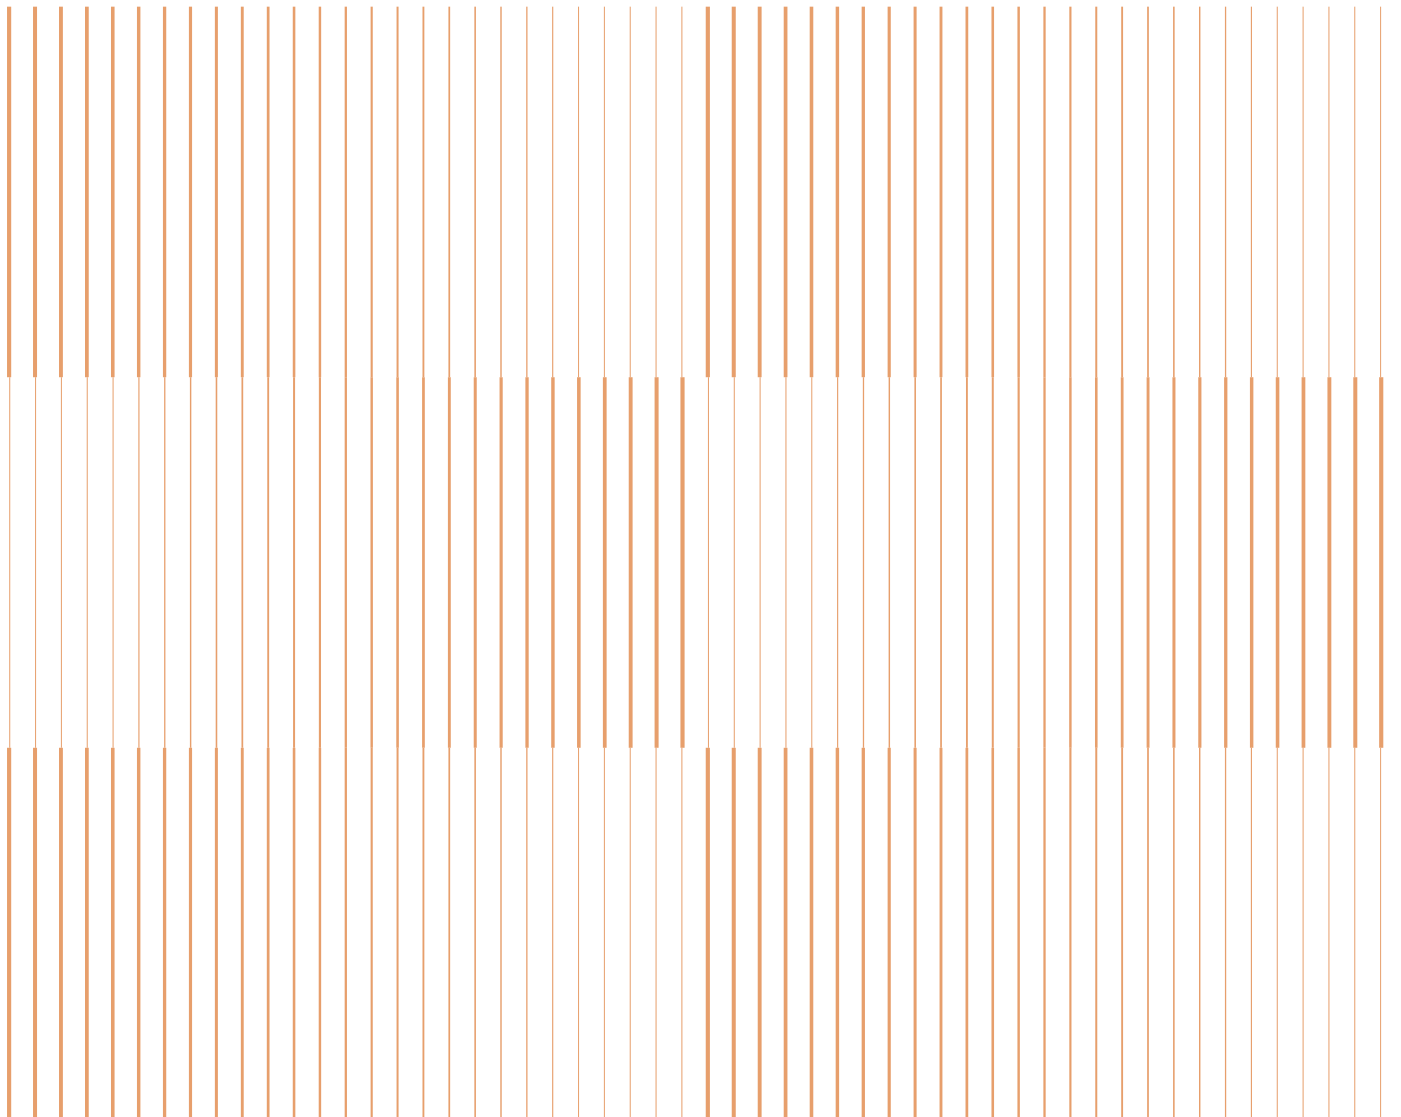

Perfect floors, without cracks, without flaws and protecting the investment made from future problems. And it is that, with our system of extreme uncoupling, we guarantee maximum protection against damage on the covering tiles.

GOODBYE WORRIES





UNCOUPLING EXTREME ANTICRACKING INTERIOR AND EXTERIOR AREAS UNDERFLOOR HEATING.


Flexible membrane for high uncoupling beneath ceramic tiles in interior spaces. Maximum resistance to deformation withstanding cracks up to 20mm. It neutralizes the tensions that occur between the structure and the covering avoiding their transmission. It is also suitable for exterior spaces, provided that the **ECODRY120/80/50** waterproofing membrane is added.

It is composed of an elastomer layer built in the form of an open cell, to absorb the horizontal movements of the structure and covered with polypropylene fibres that allows an optimal grip with the C2 S1/S2 tile adhesive used in its installation as an adhered membrane.

PRODUCT

Code	Product	Roll	m ² /roll
544017778	DYSO 30	Roll of 1,5 m x 20 m	30 m ²
544016405	DYSO 15	Roll of 1,5 m x 10 m	15 m ²
544017761	DYSO 7,5	Roll of 1,5 m x 5 m	7,5 m ²

FORMATS

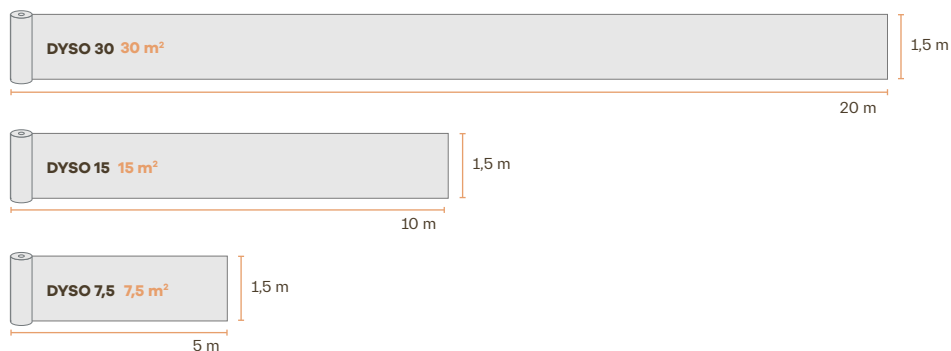


REAL TRACTION TEST



A VIDEO IS WORTH A THOUSAND WORDS.

THIS VIDEO WILL
SURPRISE YOU



CHARACTERISTICS

PATENT NUMBER: ES2722107 (A1) - 2019-08-07 DECOUPLING MEMBRANE

Polypropylene
fibres

Elastomer layer
in the form
of an open cell

Polypropylene
fibres


It withstands
cracks up to
20 mm



WARRANTY
10 years


INSTALLATION

conventional structure

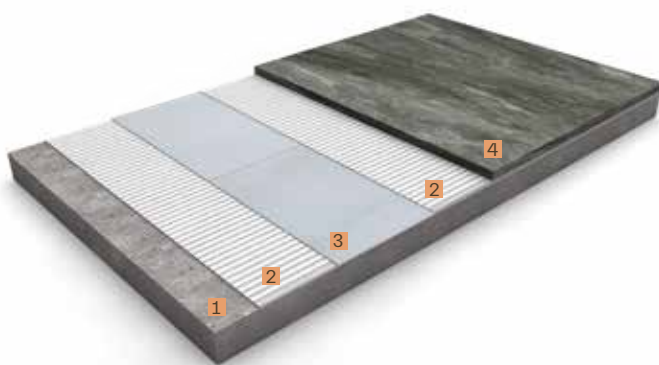

1. Structure
2. C2 S1/S2 tile adhesive
3. **DYSO** membrane
4. Covering


structure with underfloor heating

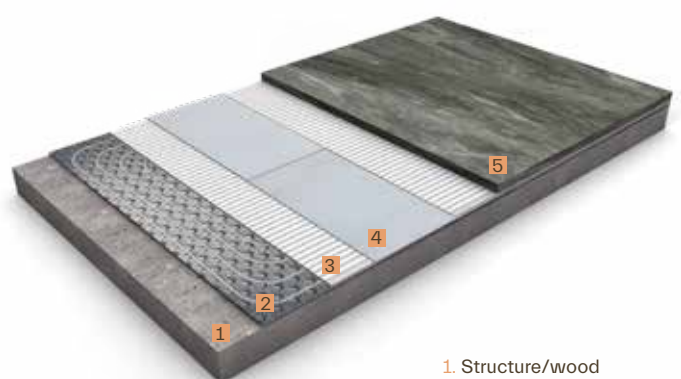

1. Structure/wood
2. Underfloor heating
3. C2 S1/S2 tile adhesive
4. **DYSO** membrane
5. Covering



INSTALLATION VIDEO



A VIDEO IS WORTH MORE
THAN A THOUSAND WORDS.

REAL COMPARATIVE TRACTION TEST




YOU'LL BE
SURPRISED



LESS THAN
ONE MINUTE

Check the technical
data sheet on our
website
www.revestech.com.

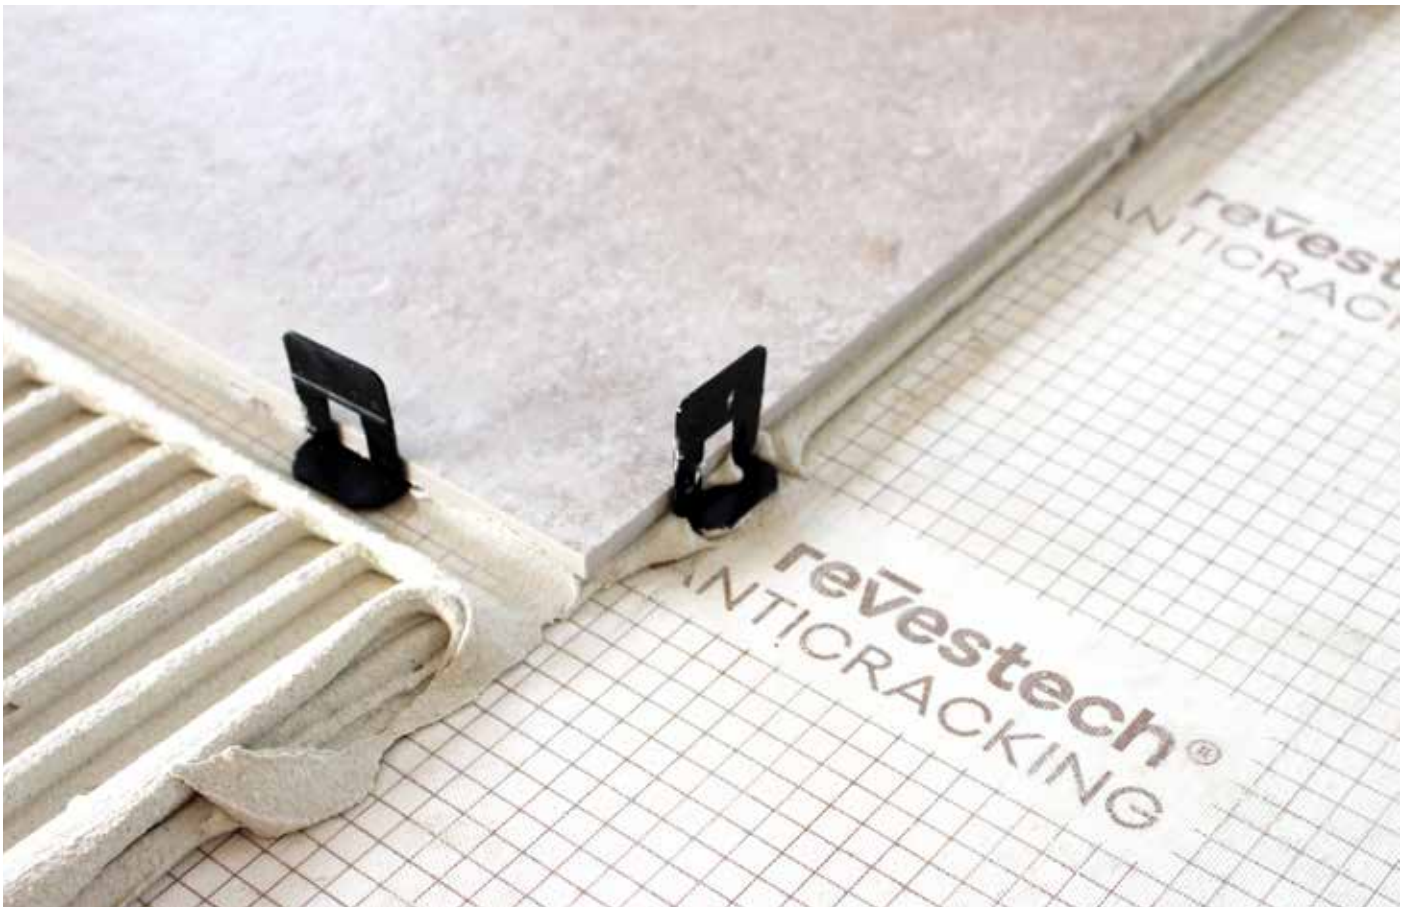

BECAUSE IT IS A HIGH-PERFORMANCE MEMBRANE.

- UNCOUPLING THE COVERING OF THE STRUCTURE AND NEUTRALIZES THE TENSIONS THAT OCCUR BETWEEN THE SUBSTRATE AND THE CERAMIC TILES, DERIVED FROM THE DIFFERENT STRUCTURAL MOVEMENTS OR EXPANSION OF MATERIALS.
- THE MEMBRANE ABSORBS UP TO 20 MM CRACKS IN THE STRUCTURE AND PREVENTS ITS TRANSMISSION TO THE COVERING, PREVENTING THE APPEARANCE OF CRACKS.
- IT GUARANTEES A LASTING PROTECTION OF THE INSTALLATIONS.

BECAUSE IT IS MULTI-PURPOSE

- IDEAL FOR MODULAR HOUSES.
- SPECIALLY DESIGNED FOR AREAS OF HIGH TRACTION AND COMPRESSION (DIFFERENTIAL SETTLEMENT, COLUMNS, VERTICAL MEETING POINTS) AND FOR HIGH TRAFFIC AREAS (AIRPORTS, SHOPPING CENTERS...).
- INDICATED FOR STRUCTURES WITH THERMAL EXPANSIONS AND UNDERFLOOR HEATING.
- SPECIALLY DESIGNED TO INSTALL UNDER LARGE FORMAT CERAMIC TILES.
- COMPATIBLE WITH ANY **DRY** OR **ECODRY** WATERPROOFING SYSTEM.

BECAUSE IT IS SUITABLE FOR UNDERFLOOR HEATING.


- SINCE IT HAS THE MINIMUM THICKNESS: 0,5 MM
- FOR ITS QUALITIES OF THERMAL CONDUCTIVITY.

BECAUSE IT IS VERY EASY TO INSTALL.

- ADHERED DIRECTLY TO THE STRUCTURE WITH TILE ADHESIVE.
- NO NEED TO REMOVE THE EXISTING OLD COVERING IN REFURBISHMENT.
- IT DOES NOT REQUIRE ANY SPECIAL TOOLS.
- IT IS VERY EASY TO MANIPULATE BECAUSE OF ITS FLEXIBILITY AND LIGHTNESS.

FOR ITS PROFITABILITY: SAVES TIME AND MONEY.

- THE EXTREME SPEED OF INSTALLATION SHORTENS THE TIMES AND THE LABOR FORCE.
- IN REFURBISHMENT, WE SAVE THE COST OF REMOVING THE PREVIOUS COVERING.
- ONCE INSTALLED IT DOES NOT REQUIRE MAINTENANCE THROUGHOUT ITS LIFESPAN.
- WE SAVE EXTRA COSTS DERIVED FROM FUTURE PROBLEMS IN THE COVERING.



INSTALLATION STEPS

DYSO



1. Check the stability of the structure and clean the surface. The structure must be clean of any element that make difficult the adhesion of the membrane.



2. Apply C2 S1/S2 tile adhesive with a 4/6 mm notched trowel. Apply the adhesive on small patches to prevent drying and always in the same direction. Do not install the **DYSO** membrane on hardened adhesive.



3. Place the membranes edge to edge, these must never overlap.



4. Press the **DYSO** membrane hard on the structure with the help of a plastic trowel making sure to eliminate all possible air bubbles.

ATTENTION: once installed, it should be checked that the membrane is totally adhered to the structure.



5. For large format tiles, it is necessary to apply adhesive also on the tiles: **DOUBLE ADHESION**.



6. Before installing the tiles, wait at least 24 h. for the adhesive on the membrane to dry. Use the adhesive recommended by the manufacturer of the tiles to adhere them to the membrane.

Important

Since the system needs space to absorb structural movements, it is necessary **TO MAKE PERIMETRAL EXPANSION JOINTS** of at least 8 mm and **JOINTS BETWEEN THE PIECES** of at least 2 mm.


revestech®

ADVANCED UNCOUPLING MAXIMUM PROTECTION FOR FLOORS WITHOUT CRACKS



5

MULTIFUNCTION

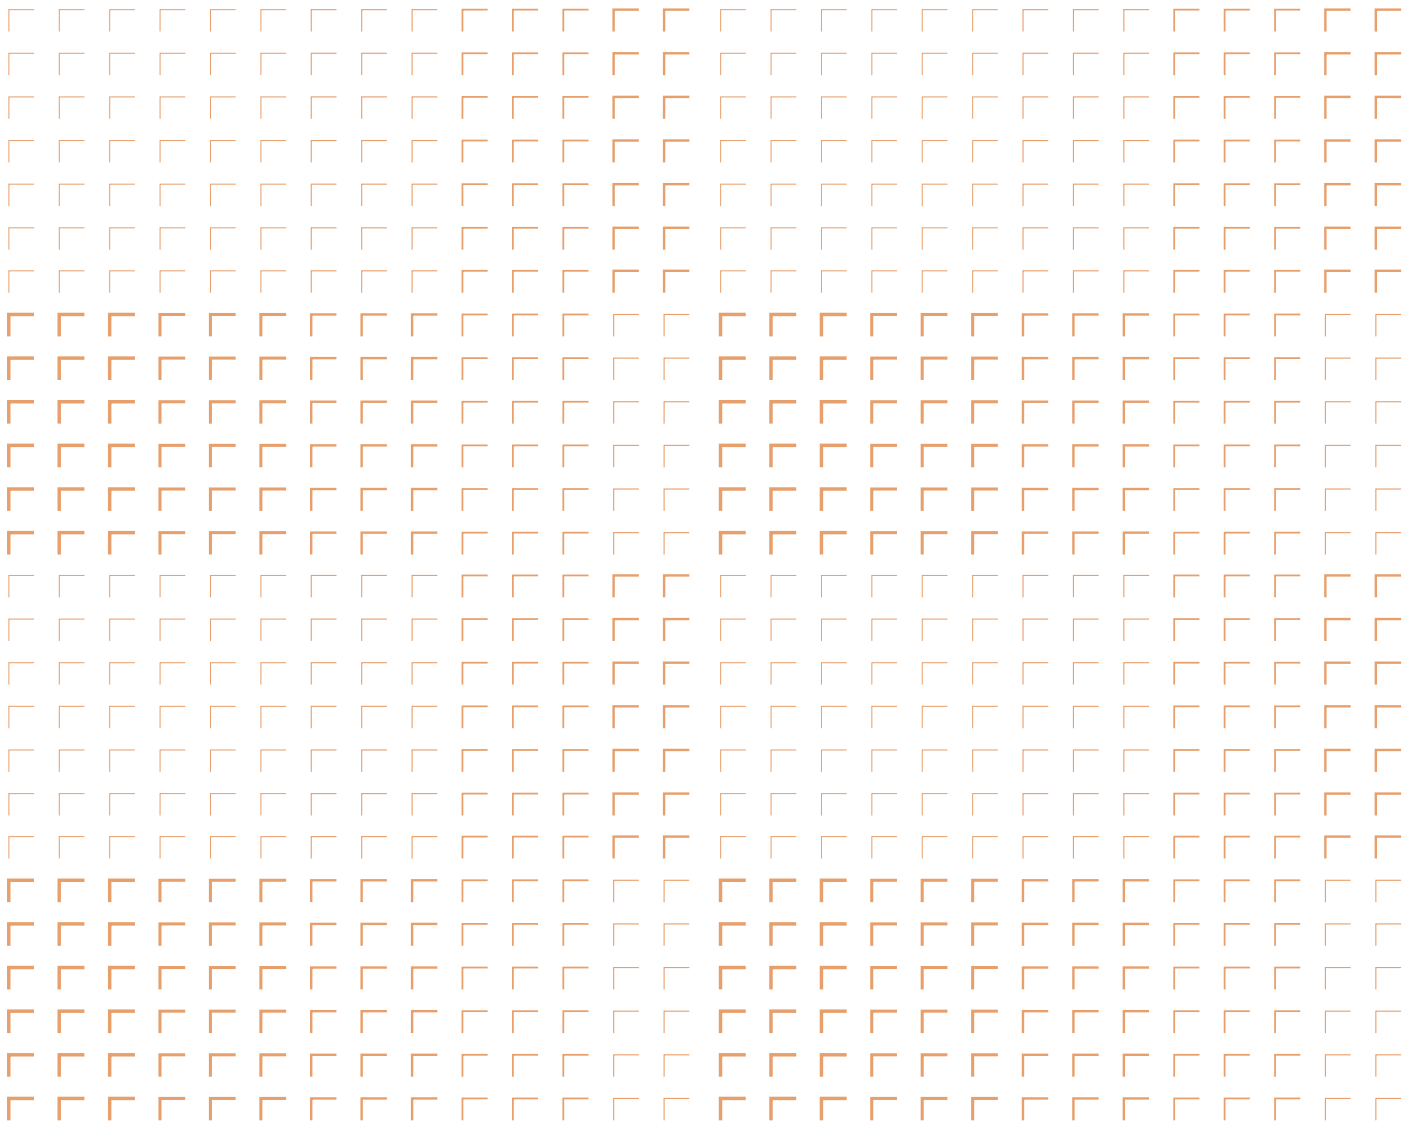

Our commitment to excellence is reflected in each centimeter of the floor. Quality without cracks and watertightness without conditions are some of the advantages of these innovative systems that guarantee quality installations.





MULTIFUNCTION SOLUTION EXTERIORS AND INTERIORS WATERPROOFING, UNCOUPLING, SOUNDPROOFING, VAPOUR COMPENSATION.

Membrane produced with the latest extrusion technology for the manufacturing of composites. It is composed of 3 different layers that give multifunctionality to the membrane, both interiors and exteriors. Suitable for solving waterproofing, uncoupling, soundproofing problems and avoid the accumulation of vapour pressure in the structure.

COMPENSATION OF THE VAPOUR IN THE SUBSTRATE

The special geotextile layer of its back side compensates the vapour and humidity from the substrate, preventing the moisture from the basement to be transferred to the covering and the joints. In this way, these are protected from capillarity efflorescence and from mould. Some water-soluble salts can be transported by capillarity through porous materials and be deposited in its surface when water evaporates due to the effect of the sun rays and/or air, causing efflorescence.

MULTIFUNCTION

To strengthen the multifunction system of this membrane and for it to be waterproofing, uncoupling, soundproofing and to compensate the vapour pressure of the structure, it is essential to place **DRY BAND 13X13** in the joints, as well as **DRY BAND** and **ACUBAND** in the perimeter.

CRACKS INSULATION

It absorbs fractures that may occur in the structure and up to 4mm horizontal cracks. It can cover existing cracks, absorbing possible movements.

The North American institute TCNA certifies **ACU200** as HIGH PERFORMANCE, under ANSI A118.12 system crack resistance test.

SOUNDPROOFING

ACU200 stands out for its capacity and reduction of impact sound, and can be installed both under flooring and under wooden floor. Due to its advanced design, it offers a significant reduction in impact noise, providing an acoustically more comfortable environment.

PRODUCT

Code	Product	Roll	m ² /roll
544010229	ACU200 20	Roll of 1,5 m x 20 m	30 m ²
544010212	ACU200 10	Roll of 1,5 m x 10 m	15 m ²
544010205	ACU200 5	Roll of 1,5 m x 5 m	7,5 m ²

FORMATS




CHARACTERISTICS

Polyester fibres

Polymeric membrane

Polypropylene fibres



WARRANTY
10 years




EN 13956:2012


INSTALLATION



* System valid for

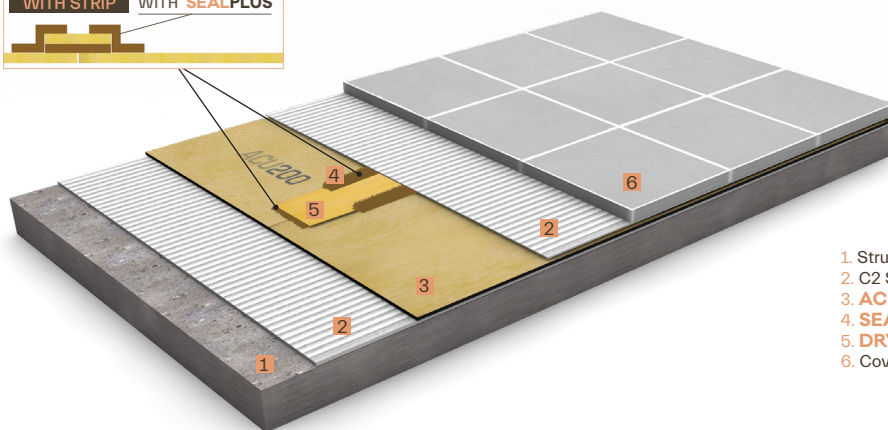

1. Structure
2. C2 S1/S2 tile adhesive
3. ACU200 membrane
4. SEALPLUS adhesive
5. DRY BAND strip for joints
6. Covering

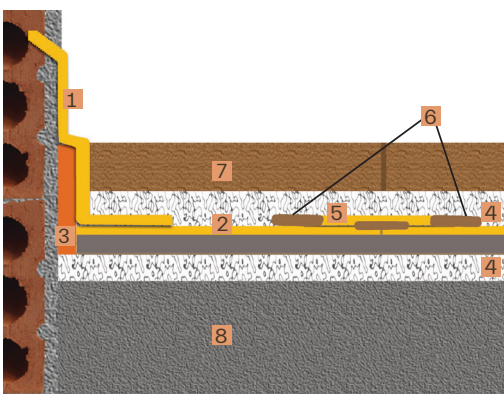

1. DRY BAND
2. ACU200
3. ACU BAND
4. C2 S1/S2 tile adhesive
5. DRY BAND 13x13
6. SEAL PLUS
7. Covering
8. Structure

TECHNICAL DATA SHEET

Characteristics	Test	Unit	Tolerance	Value
Watertightness	EN 1928:2000 Meth. B			PASS
Tensile strength	EN 12311-2 Meth. A	N/50 mm	MLV L $\geq$ 820 MLV T $\geq$ 1.325	L= 820 T= 1325
Elongation	EN 12311-2 Meth. A	%	MLV L $\geq$ 85 MLV T $\geq$ 75	L= 85 T= 75
Resistance to static load	EN 12730	Kg	MLV L $\geq$ 20	20
Resistance to impact	EN 12691	mm		2000
Resistance to longitudinal breakage	UNE EN 12310-2		MLV L $\geq$ 170	170 MLV min (N)
Resistance to transverse breakage	UNE EN 12310-2		MLV T $\geq$ 200	200 MLV min (N)
Resistance of overlaps (shear)	EN 12317-2	N/50 mm		170
Folding	EN 495-5	°C		-40
Reaction to fire	EN 13501-1	Euroclases		F
Length	EN 1848-2	m	0% and +5%	5, 10 and 20
Width	EN 1848-2	m	-0,5% and +1%	1,5
Weight	EN 1849-2	g/m ²	-5% and +10%	950
Thickness	EN 1849-2	mm	-5% and +10%	2,00
Visible defects	EN 1850-2	mm		PASS
Straightness	EN 1848-2	mm	g $\leq$ 50	g=50
Flatness	EN 1848-2	mm	p $\leq$ 10	p=10
Dimensional stability	EN 1107-02	%	L $\leq$ 0,2 T $\leq$ 0,9	L= 0,2 T= 0,9
Effects of chemical product	EN 1847	Values do not change after 28 days in saturated calcium hydroxide solution at 23°C		

MLV: Values established by manufacturer (during test).

MDV: Declared values by manufacturer (accompanied by tolerance).

CE
EN 13956:2012

WARRANTY
10 years





1. Check the stability of the structure and clean the surface. It is convenient to use caustic soda for a more effective cleaning.



2. Reframing, measuring and cutting of the membrane.



3. Then apply C2 S1/S2 tile adhesive with a 6/8 mm notched trowel. Apply the adhesive on small patches to prevent drying and always in the same direction. Do not install the membrane on semi-set adhesive.
NOTE: In refurbishment, apply C2 S1/S2 tile adhesive directly on the old covering.



4. Place the membranes edge to edge.



5. Make the joints between membranes with **DRYBAND 13X30** strip and **SEALPLUS** adhesive.



6. Seal the **DRYBAND 13X30** strip with another layer of **SEALPLUS** adhesive (double sealing).



7. Make the joints with the vertical structures overlapping with **DRY BAND** or **ECODRY BAND** a minimum of 10 cm and sealing with **SEALPLUS** on top of the **ACU200** membrane.




8. Use the different **DRY** or **ECODRY** add-ons to solve the singular points.




9. Install the flooring tiles directly with C2 S1/S2 adhesive and fix the skirting.

* System valid for add-ons:

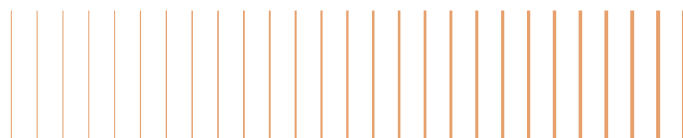

6

DRAINAGE

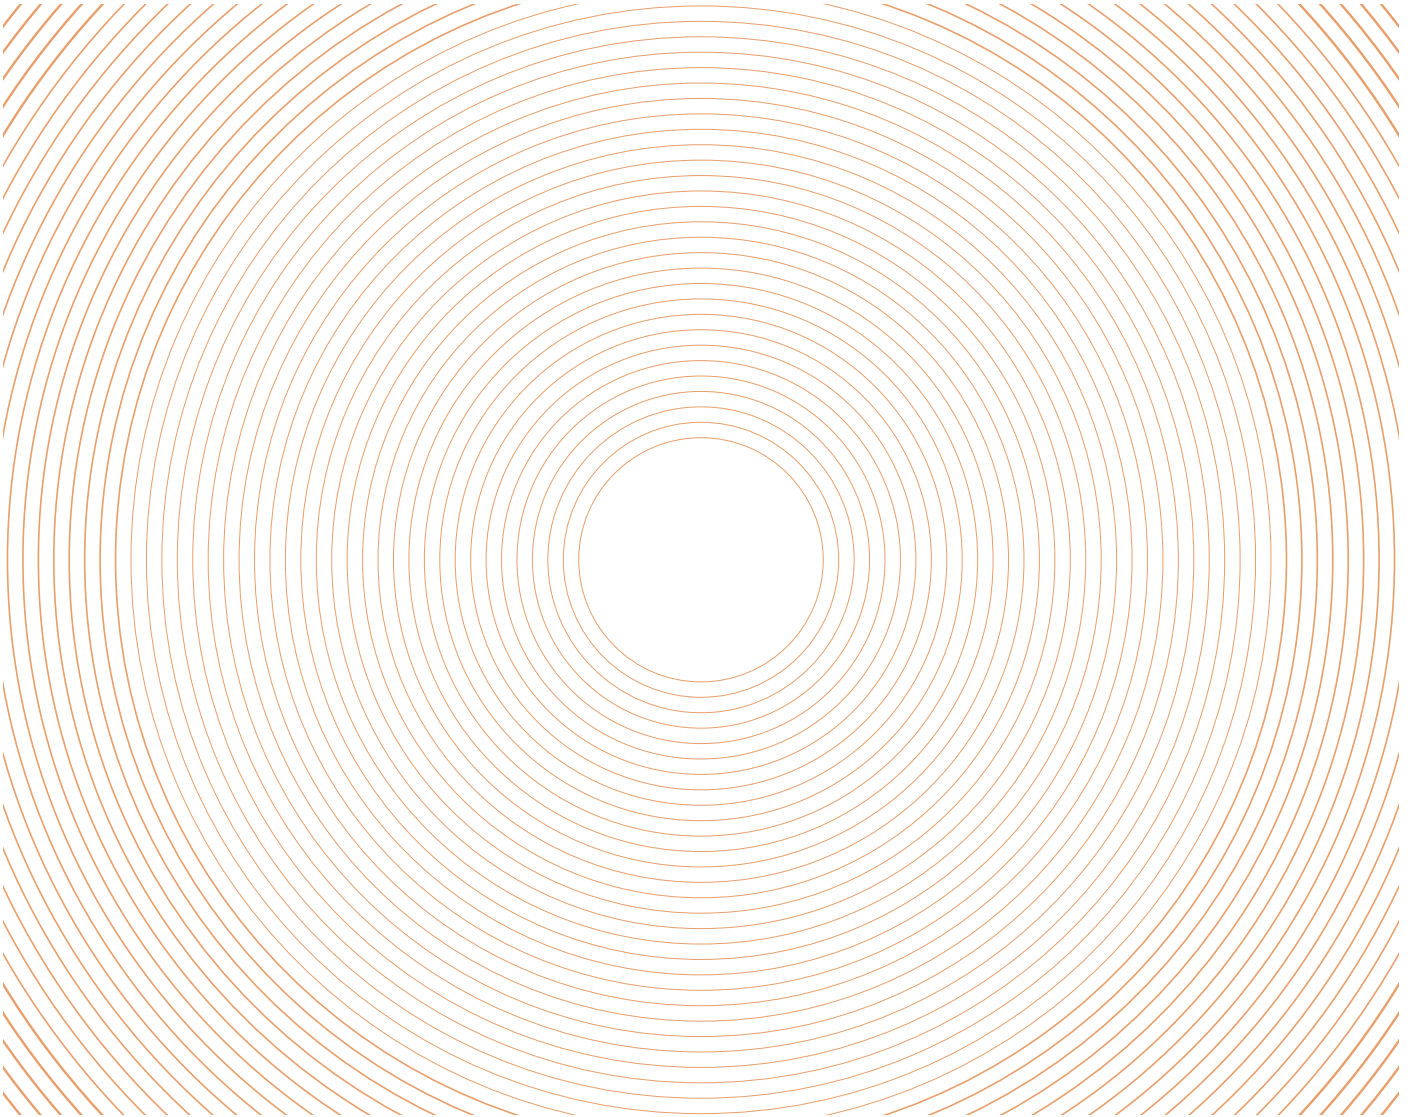

Whether on terraces, around swimming pools, or in wet areas such as a spa, the evacuation of water on the surface requires a constructive solution of maximum safety, efficiency and quality. If we add to that elegance and design... Welcome to a very sophisticated space.

ELEGANCE WITHOUT RISK



WALKLEVEL

A prefabricated drainage channel system suitable for covering with flooring, 100% watertight that allows the draining of surface waters. Suitable for covered surfaces in internal and external environments.

The channel is finished in high-performance polyurethane and has a heat-sealed waterproofing membrane **ECODRY50**, a membrane composed of a polymeric membrane of high-performance thermoplastic polyolefins CPE (EVA-based Circular Polymer), resulting from the transformation and treatment of raw materials of circular economy, and extruded on polyester fibres.

DRAINAGE
SWIMMING POOLS
FLAT ROOFS
TERRACES
WELLNESS CENTERS
SPAS


PRODUCT

COMPONENTS

_ Channel provided with two eaves of heat-sealed waterproofing membrane 13 cm wide.

_ PVC profiles that provide support to the ceramic tiles 1 m x 29 mm.

The number of profiles will be determined by the total linear metres of the project.

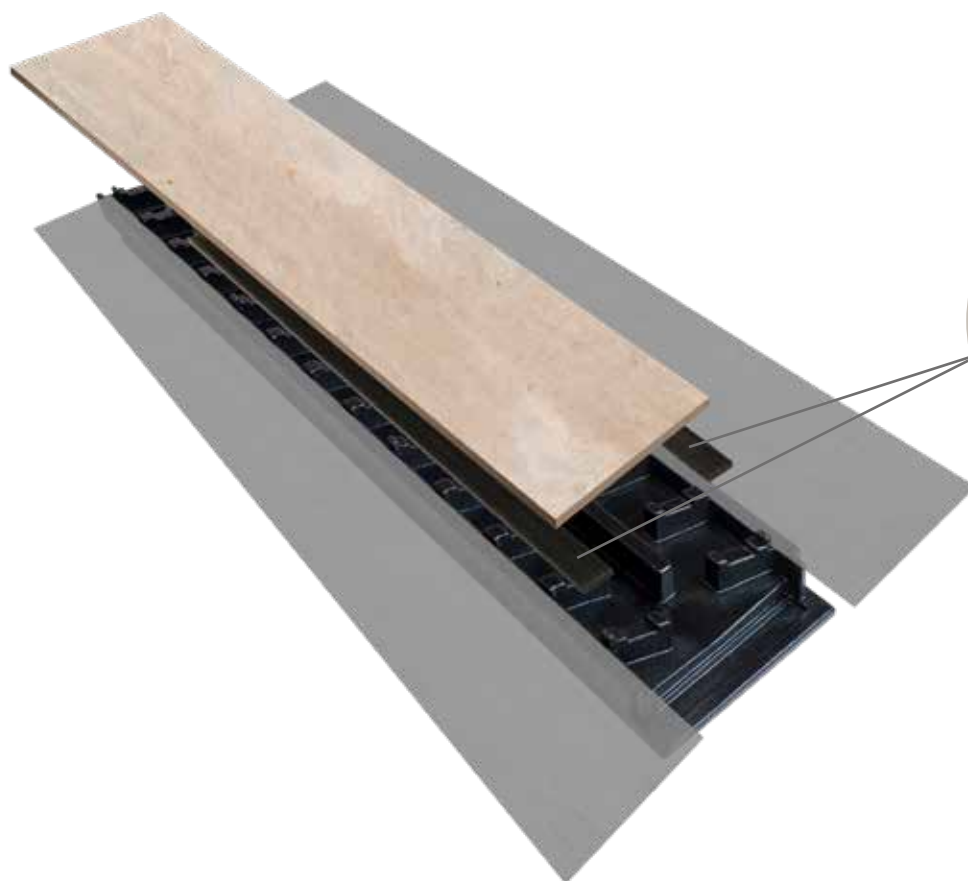

See **ECODRY50** membrane technical data on page 40.

CHARACTERISTICS



MEETING POINT WITH THE MEMBRANE SOLVED SINCE IT HAS TWO EAVES OF HEAT-SEALED **ECODRY50** MEMBRANE.




EASY TO ASSEMBLE, PERFECT AND SECURE JOINTS BETWEEN THE COMPONENTS.



TOTAL WATERTIGHTNESS OF THE JOINTS BY SEALING WITH **REVESTECHFLEX** ADHESIVE.



FINISHED IN HIGH PERFORMANCE POLYURETHANE.




MINIMUM THICKNESS.



INTERIOR V-SLOPES THAT ALLOW QUICK AND EASY EVACUATION.

DRAINAGE CHANNELS WITH SPECIAL COATING FOR PROTECTION AGAINST UV RAYS.

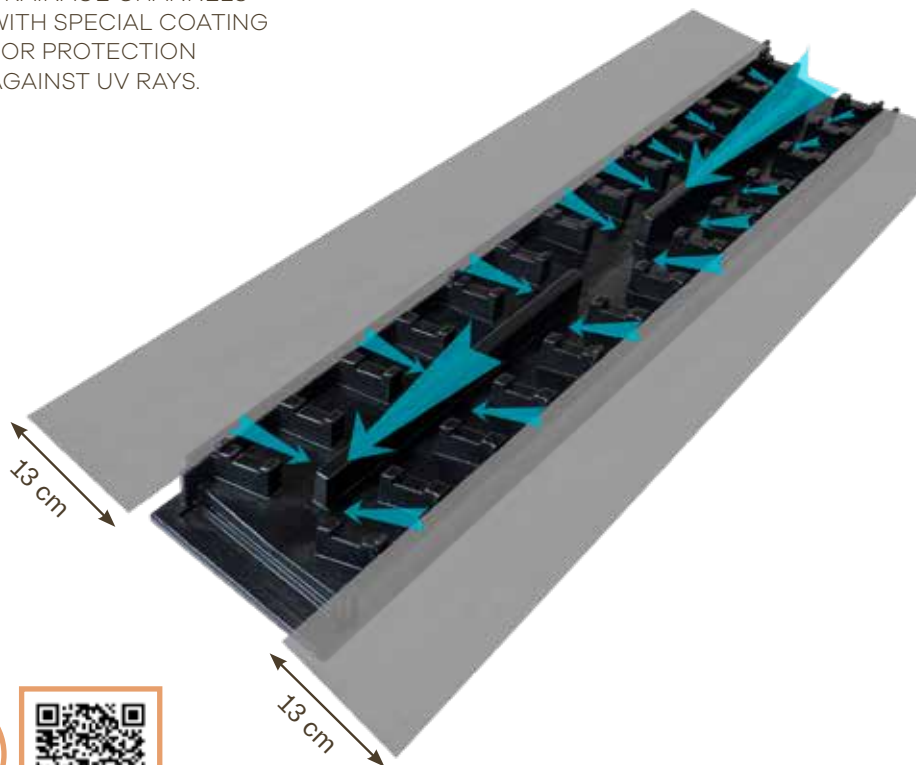

FINISHED WITH GUARANTEE OF REVESTECH QUALITY



INSTALLATION VIDEO

WALKLEVEL



PRODUCT

The system consists of a several components that once connected form a drainage channel for swimming pools and terraces, ready to be covered with flooring. All pieces of the **WALK LEVEL** system are available for two ceramic tile widths: 15 cm and 30 cm. It includes PVC profiles to hold the ceramic pieces. The quantity of the profiles will be determined by the total linear metres of the project.

WALK LEVEL channel 15 cm _____ Ref. 544019680




WALK LEVEL channel 30 cm _____ Ref. 544019826

Drainage channel of 95 cm long with internal v-slopes. Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves.

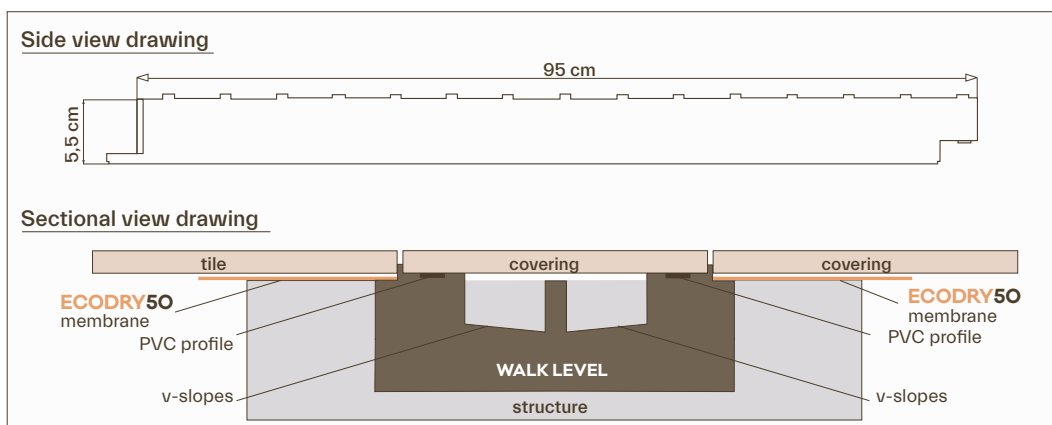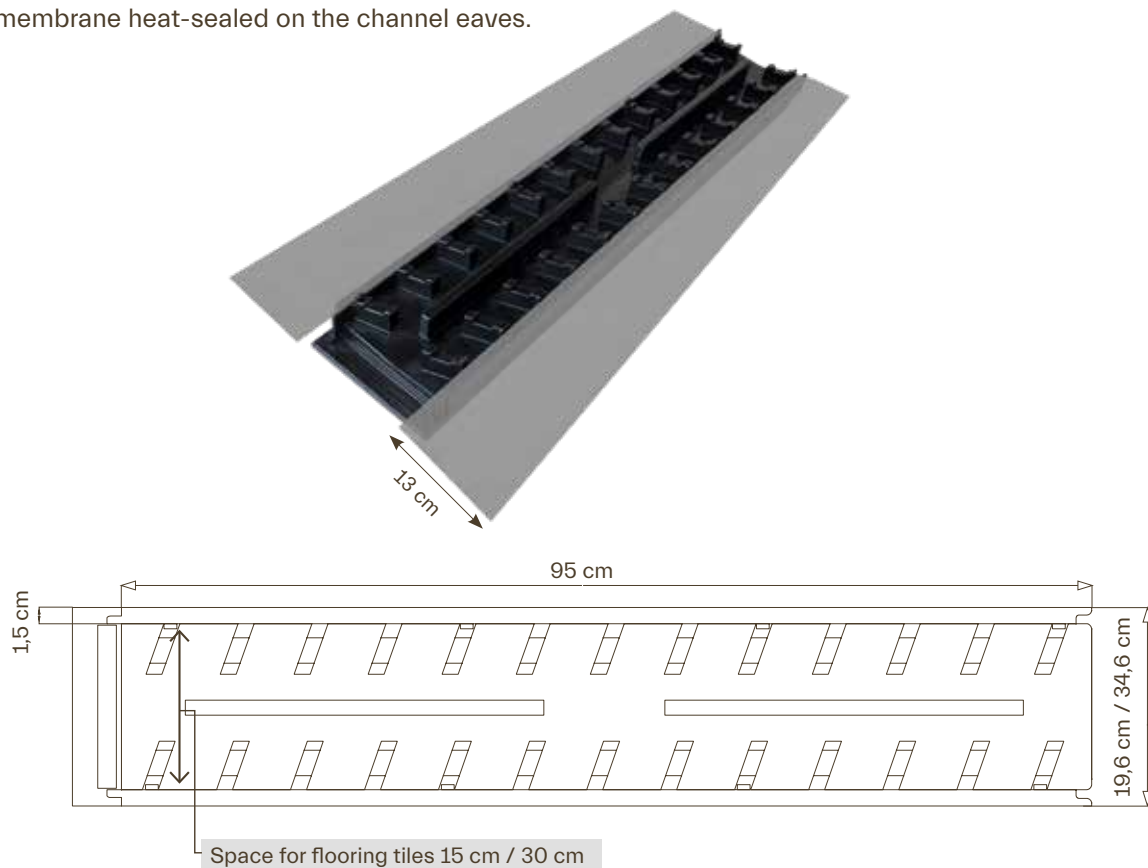

WALK LEVEL adjustment

Piece of adjustment for ceramic pieces of 15 cm and 30 cm of width, of different lengths with internal V-slopes. Includes: **ECODRY50** heat-sealed waterproofing membrane on the eaves of the channel. To complete the measures required for the installation, the pieces will be available in the following sizes: 15, 25, 35, 45, 55, 65, 75 and 85 cm.

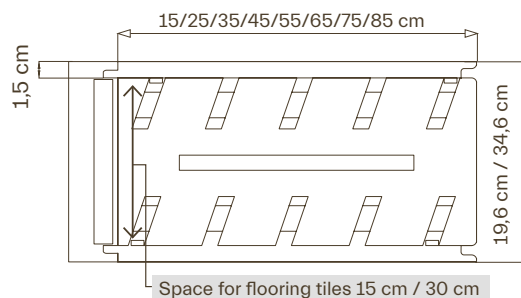
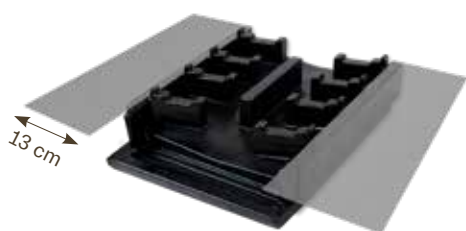


	Reference
WALK LEVEL adjustment 85 x 15 cm	544019697
WALK LEVEL adjustment 85 x 30 cm	544019833
WALK LEVEL adjustment 75 x 15 cm	544019703
WALK LEVEL adjustment 75 x 30 cm	544019840
WALK LEVEL adjustment 65 x 15 cm	544019710
WALK LEVEL adjustment 65 x 30 cm	544019857
WALK LEVEL adjustment 55 x 15 cm	544019727
WALK LEVEL adjustment 55 x 30 cm	544019864
WALK LEVEL adjustment 45 x 15 cm	544019734
WALK LEVEL adjustment 45 x 30 cm	544019871
WALK LEVEL adjustment 35 x 15 cm	544019741
WALK LEVEL adjustment 35 x 30 cm	544019888
WALK LEVEL adjustment 25 x 15 cm	544019758
WALK LEVEL adjustment 25 X 30 cm	544019895
WALK LEVEL adjustment 15 x 15 cm	544019765
WALK LEVEL adjustment 15 x 30 cm	544019901

WALK LEVEL drain 15 cm _____ Ref. 544019772

WALK LEVEL drain 30 cm _____ Ref. 544019918


Drainage piece with internal v-slope, discharge capacity of 1.38 l/s and outlet Ø 63 mm MALE coupling. Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves and special drain designed for this system that withstands high pressures and is resistant to the products usually used in swimming pools.

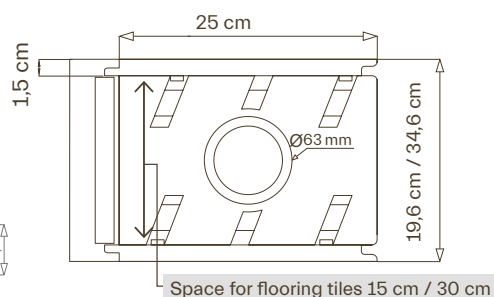

WALKLEVEL


WALK LEVEL lateral drain 15 cm _____ Ref. 596350168
WALK LEVEL lateral drain 30 cm _____ Ref. 596350175

Drainage piece with discharge capacity of 0.68 l/s and lateral outlet Ø 50 mm MALE coupling.
 Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves and special drain designed for this system that withstands high pressures and is resistant to the products usually used in swimming pools.

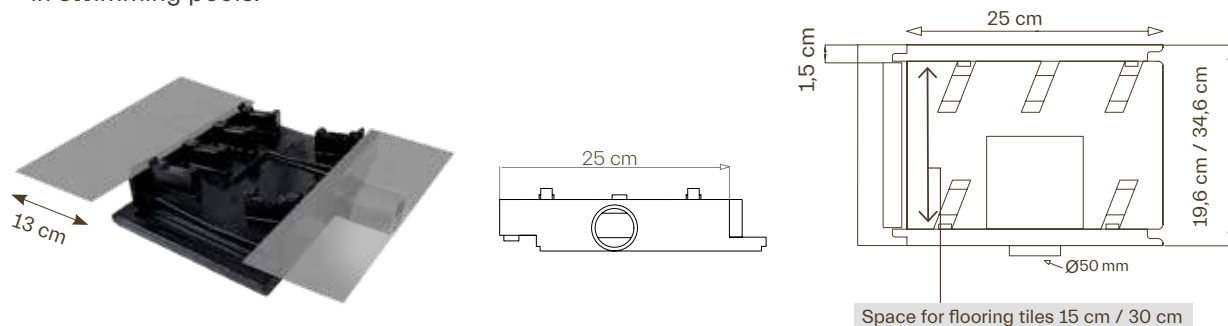


WALK LEVEL corner 15 cm _____ Ref. 544019789
WALK LEVEL corner 30 cm _____ Ref. 544019925

Corner piece with internal v-slope.
 Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves.

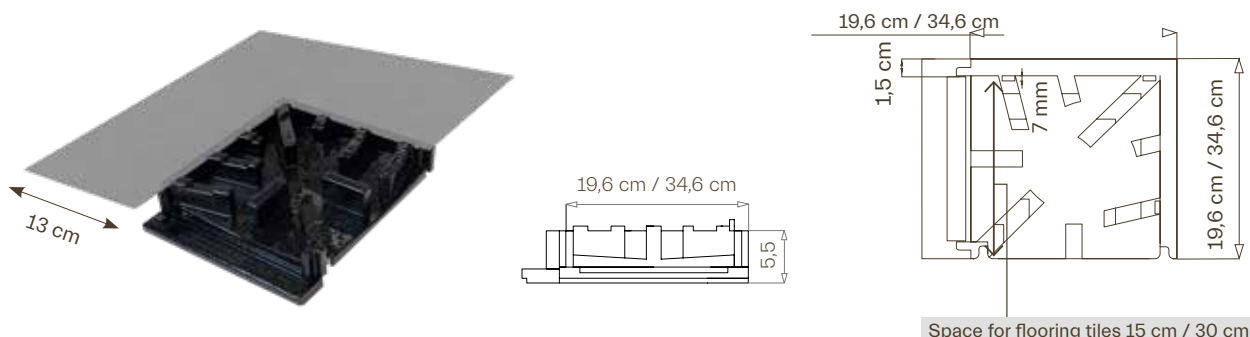

WALK LEVEL outside corner 15 cm _____ Ref. 596350441
WALK LEVEL outside corner 30 cm _____ Ref. 596350458


Corner piece with internal v-slope.
 Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves.

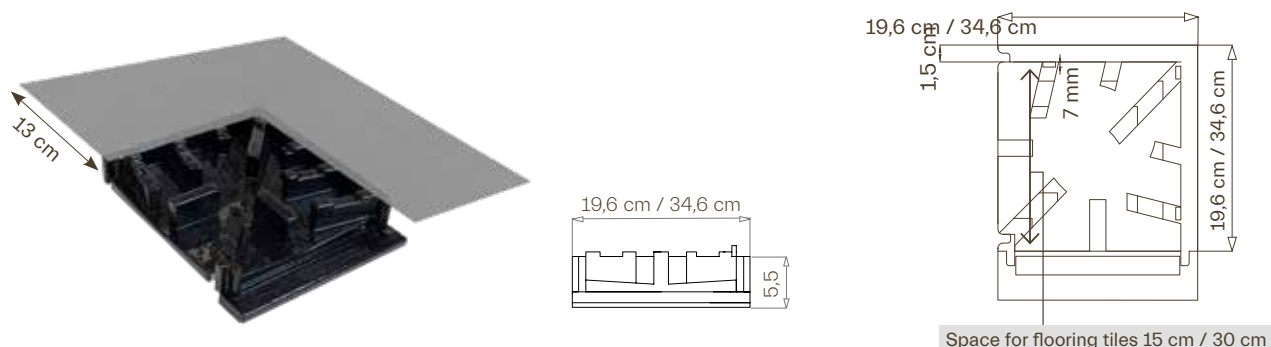

WALK LEVEL side A 15 cm _____ Ref. 544019802
WALK LEVEL side A 30 cm _____ Ref. 544019949

Channel start terminal.


Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves.

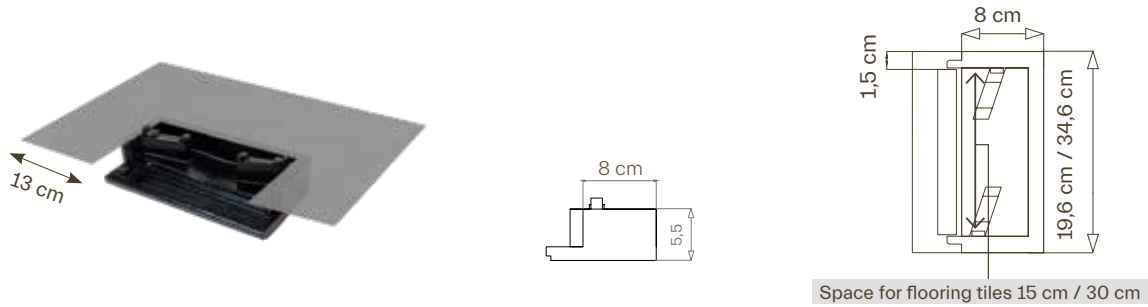

WALK LEVEL side B 15 cm _____ Ref. 544019819
WALK LEVEL side B 30 cm _____ Ref. 544019956

Channel closing terminal.


Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves.

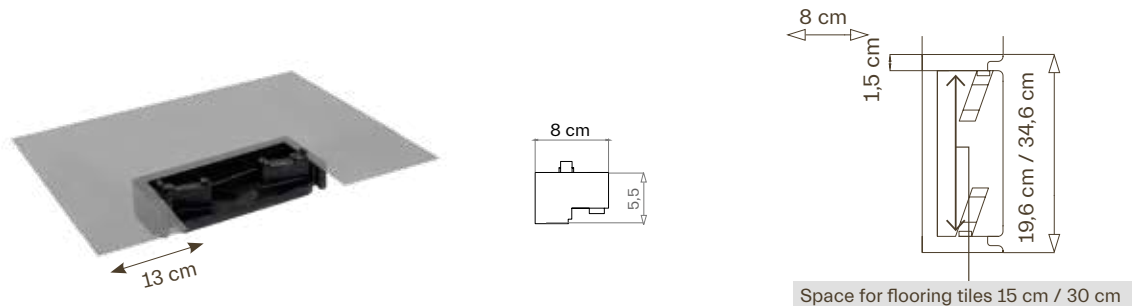

WALK LEVEL corner drain 15 cm _____ Ref. 544019796
WALK LEVEL corner drain 30 cm _____ Ref. 544019932

Corner drain with discharge capacity of 1.38 l/s and outlet Ø 63 mm MALE coupling.

Includes: **ECODRY50** waterproofing membrane heat-sealed on the channel eaves and special drain designed for this system that withstands high pressures and is resistant to the products usually used in swimming pools.

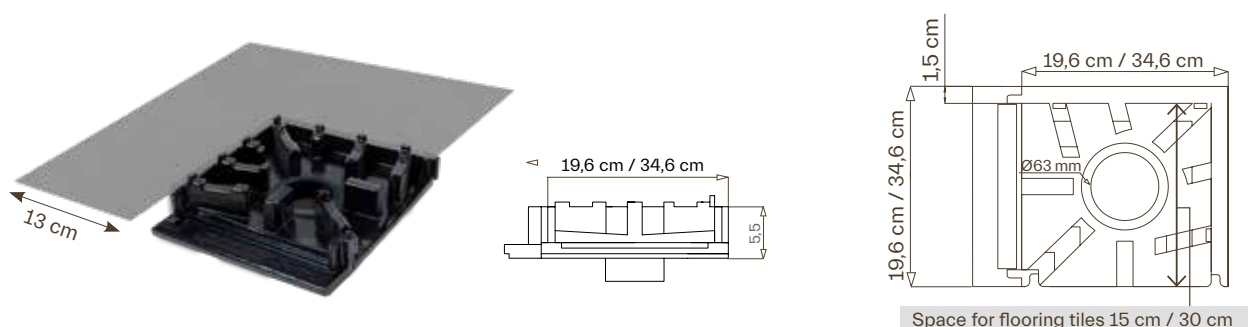

WALKLEVEL

PRODUCT



Yield: 25 to 30 linear metres.

SEALPLUS 6

Pot 6 kg.
Ref. 544010670

Adhesive for overlaps of joints between the eaves of the **WALK LEVEL** pieces and the waterproofing membrane of the rest of the substrate.



Yield: 5,5 to 6 linear metres.

SEALPLUS O600

Blister 600 ml.
Ref. 544012858



Yield: 8 linear metres of drainage.

REVESTECHFLEX

Cartridge 300 ml.
Ref. 544015323



Adhesive for sealing of joints between **WALK LEVEL** pieces and adhering the tiles to the PVC profiles.



POSITION OF THE TILES



Unique piece

The width of the tiles should be the same as the width inside the **WALK LEVEL** channel (15 cm or 30 cm).

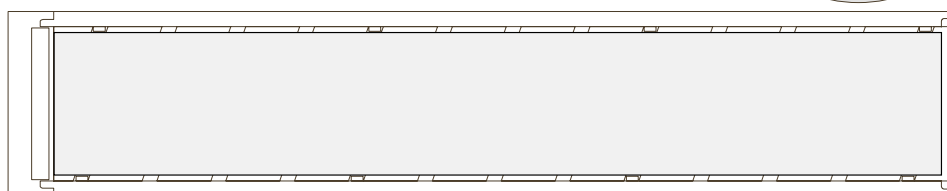

Several pieces

The length of the tiles should be the same as the width inside the **WALK LEVEL** channel (15 cm or 30 cm).

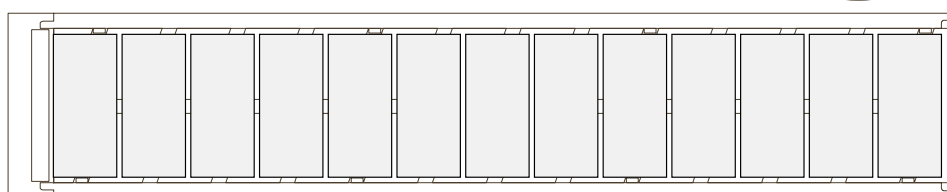


The flooring tiles must have the following characteristics:


- Minimum breaking force: 1100 N (test according to ISO 10545-4).
- Minimum thickness: 7,5 mm.

EXAMPLES

2,3 m x 4,3 m swimming pool

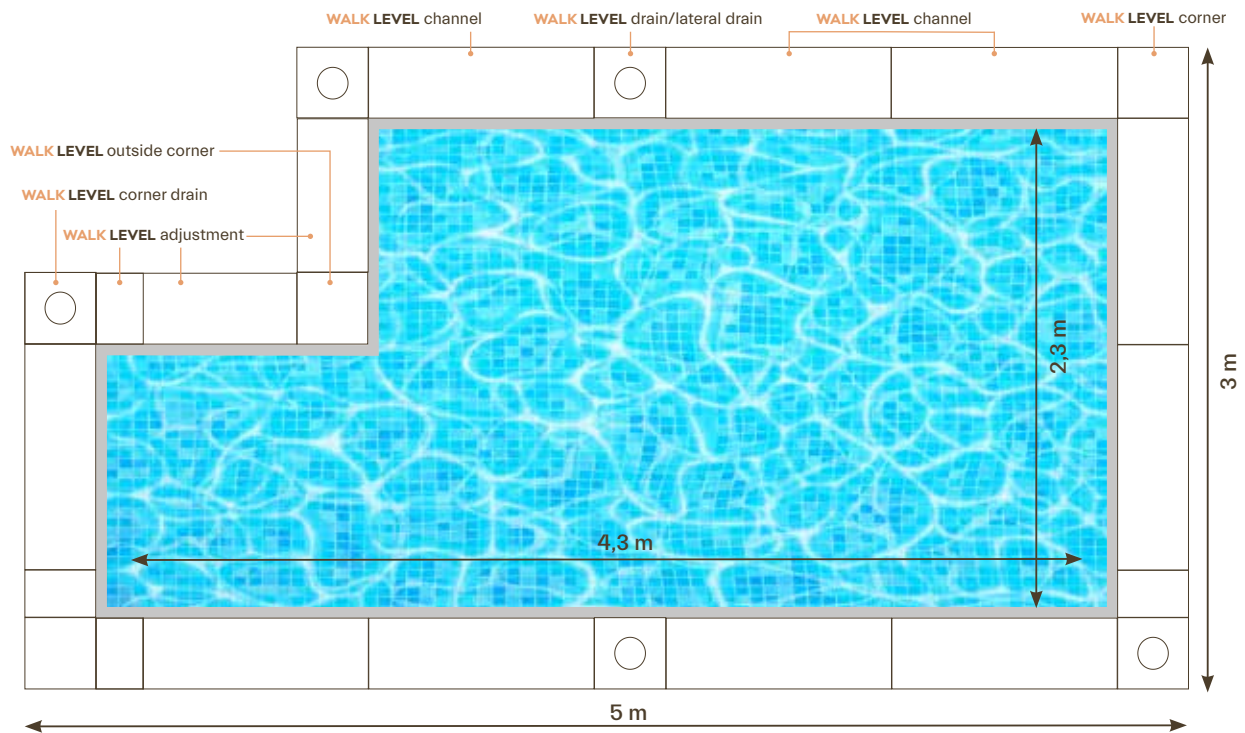


6,11 m x 4 m terrace

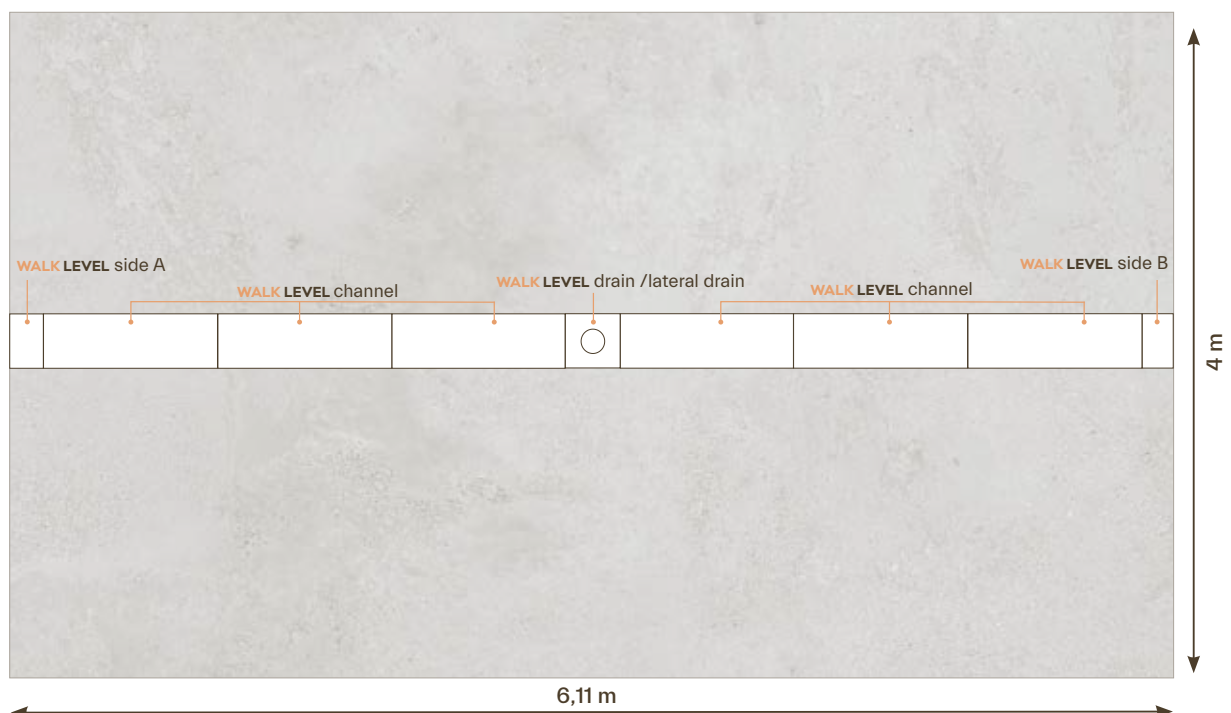

WALKLEVEL

INSTALLATION

PHASE 1 - LAYOUT AND CALCULATION OF COMPONENTS:

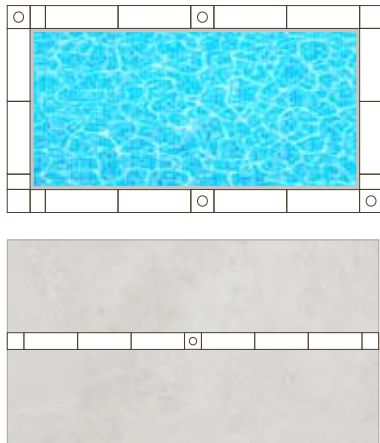

Obtain plan with the dimensions of deck/pool and send to **REVESTech** together with the measurements of the chosen flooring tiles. The maximum recommended distance between drains is 4 m. Check with the technical department of **REVESTech**.


PHASE 2 - PREPARATION OF THE SUPPORTING STRUCTURE:




Make a recess on the supporting structure along the entire channel. This recess should be 6/7 cm deep, to allow the levelling of the height of the channel, and 21/22 cm or 36/37 cm wide. Check that the slopes of the supporting structure are made toward the **WALK LEVEL** system.

PHASE 3 - ASSEMBLE OF THE CHANNEL COMPONENTS:

Connect the different parts of the channel and seal the pieces with a continuous strip of **REVESTECHFLEX** adhesive. It is recommended to place piece by piece, always connecting the male coupling on the female one. When the pieces are attached and installed on the structure, seal the joint between the parts with **REVESTECHFLEX** (see image 4).

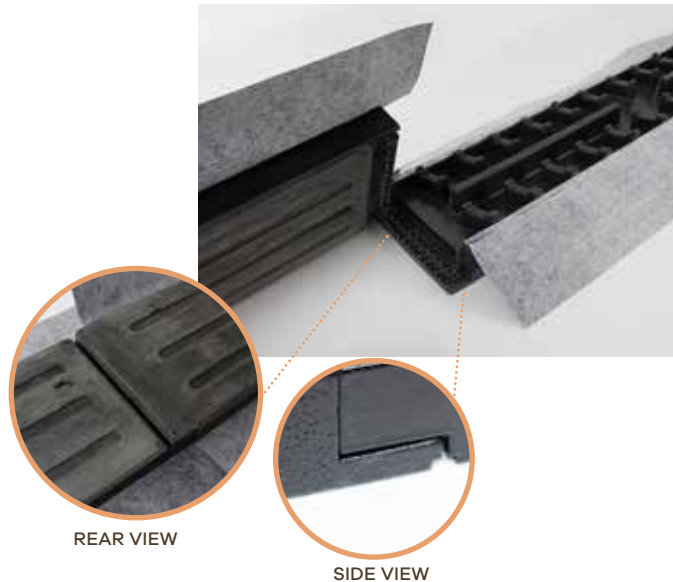

JOINING THE PIECES:

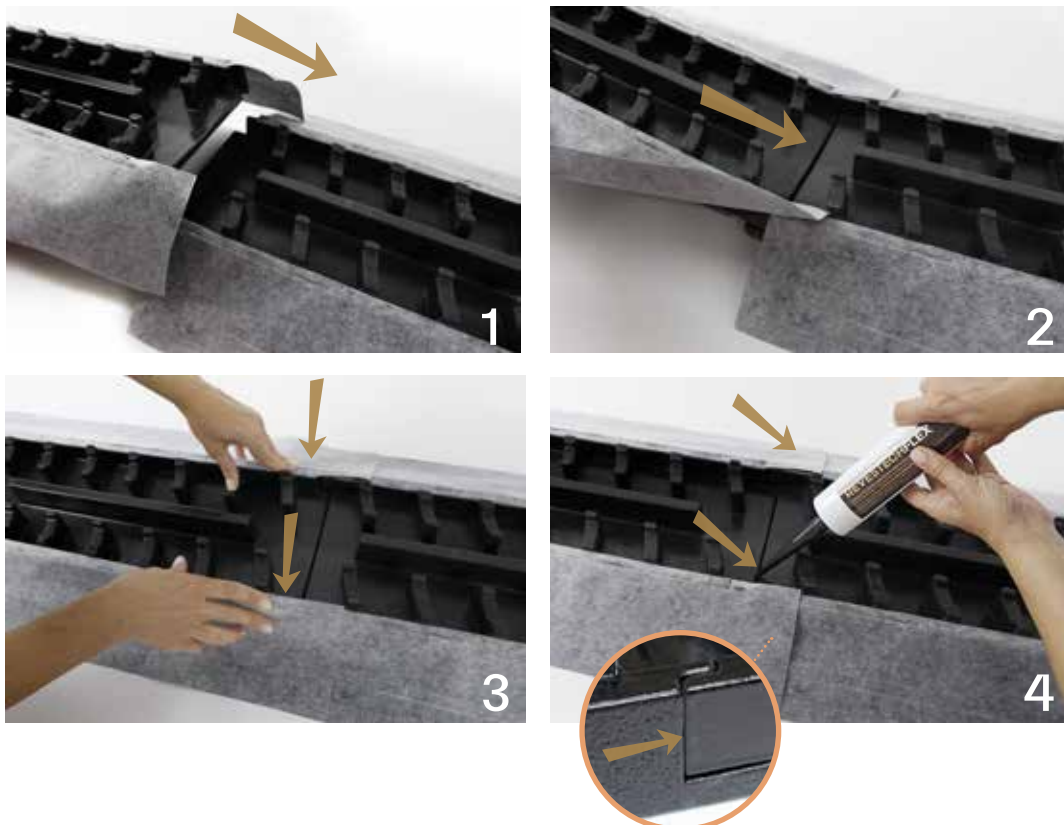

WALKLEVEL

PHASE 4 - CONNECTION WITH THE DRAIN SYSTEM:



The drains (horizontal or vertical outlet) must be connected to the drainage pipe, installing the **WALK LEVEL DRAIN** or **WALK LEVEL CORNER DRAIN** with C2 S1/S2 tile adhesive. Check that the joint between pipes is perfectly sealed.



PHASE 5 - PLACEMENT OF THE CHANNEL:



Adhere the pieces spreading a **DOUBLE SIDE** adhesive on the support and also on the back of the pieces.






For the interior finishing of the channel, cut the tiles according to the design and measurement of the channel. Adhere them to the PVC supports using **REVESTECHEFLEX** adhesive making sure that they perfectly fit in the two gaps arranged for this purpose in each piece of **WALK LEVEL**.

It is important the correctly installation of ceramic pieces which will cover the channel and leave them positioned until end of installation.

In this way we ensure that the **WALK LEVEL** pieces remain in the right position until the tile adhesive sets, that they do not suffer unwanted curvatures or movements, and also to protect the **WALK LEVEL** pieces in the final work procedure.

PHASE 6 - WATERPROOFING OF THE WALK LEVEL CHANNEL DRAINAGE:

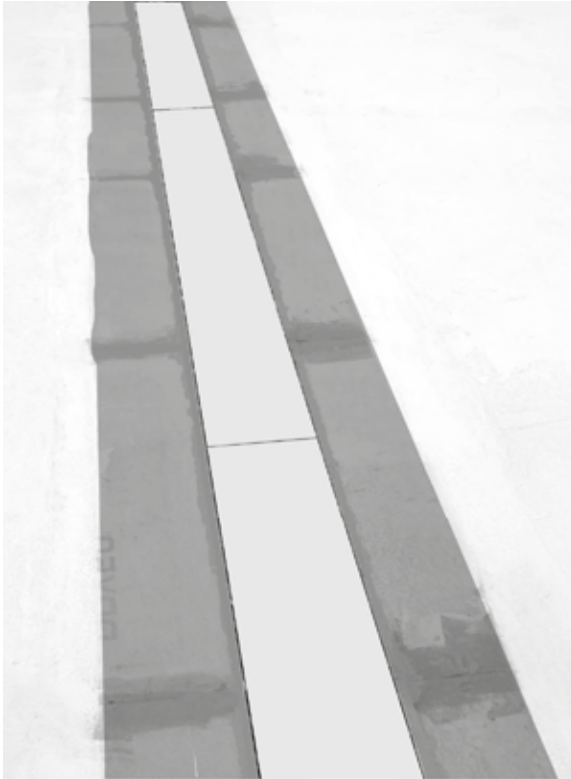

Unfold the **ECODRY50** membrane eaves and adhere to the structure with C2 S1/S2 tile adhesive. Overlap the eaves of adjacent **WALK LEVEL** parts using **SEALPLUS** adhesive so that the entire length of the channel is waterproofed on both sides.



PHASE 7 - WATERPROOFING OF THE STRUCTURE:



Proceed to waterproof the rest of the structure always overlapping the membrane a minimum of 10 cm with the **ECODRY50** membrane eaves of the **WALK LEVEL** system. Overlaps between membranes should be sealed using **SEALPLUS** adhesive.

PHASE 8 - FINISHING OF THE SUPPORTING STRUCTURE AND COVERING OF THE INSIDE OF THE CHANNEL:

Proceed to install the flooring tiles around the channel taking into account that the tiles must be placed against the protruding stops present on the sides of the channel pieces. Thus, being adjoined to the edges of the channel.

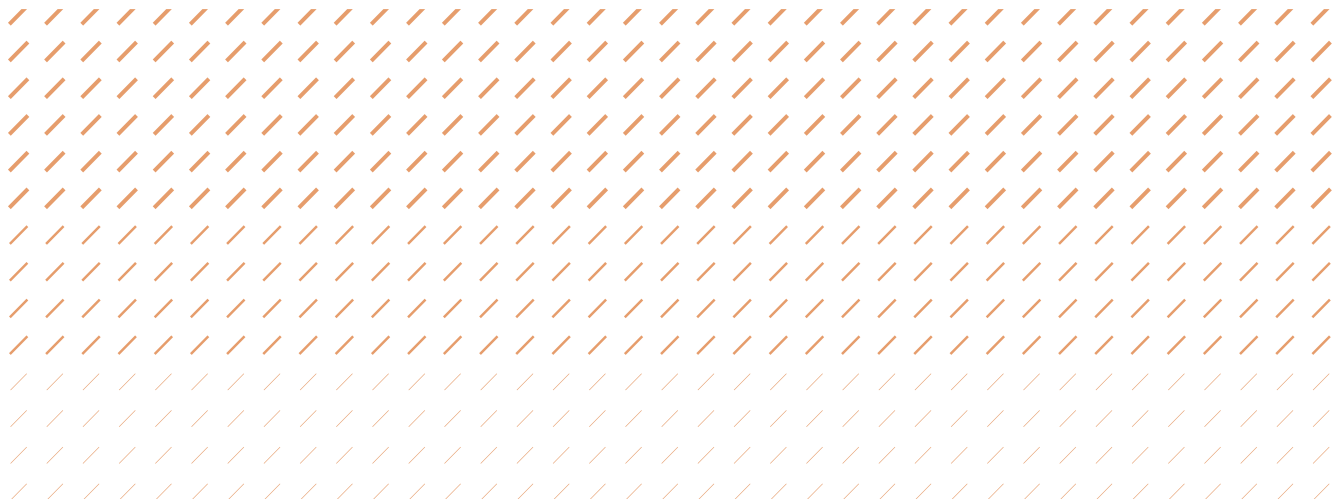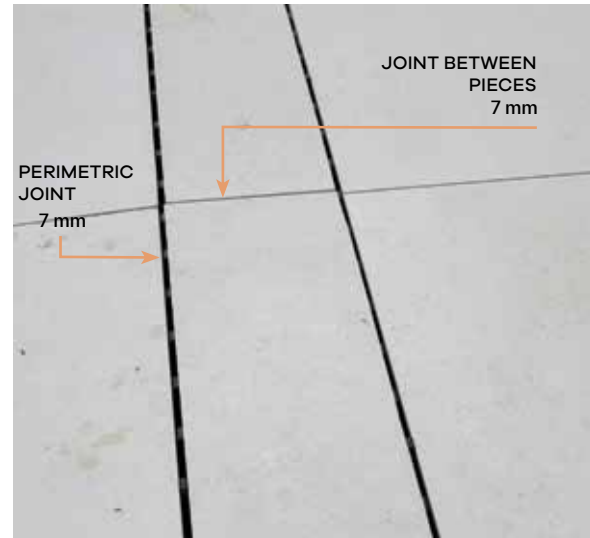

OUTDRAIN LEVEL

Drain for evacuating water in terraces and balconies, includes **ECODRY50** waterproofing membrane heat-sealed around the entire perimeter to guarantee 100% watertightness.

Designed for installation at the same level as the finished floor providing an excellent water drainage without interrupting the visual continuity of the tiling. It receives water from four slopes and drains it through the gaps between tiles.

HIGH-END
CONCEALED
DRAINAGE
WATERTIGHTNESS
AND STYLE
FOR BALCONIES AND
TERRACES

PRODUCT

The tiles must have the following characteristics:

- Minimum breaking strength: 1100 N (tested according to ISO 10545-4).
- Minimum thickness: 7.5 mm.

Versatility:

Adapts to all types of constructions and balcony projects. Can be installed with all kinds of finished, preferably ceramic tiles.

Cleaning and maintenance:

The Level terrace drain not only features a hygienic antibacterial and fungicidal treatment but also incorporates an easy-to-remove ceramic cover with a special cleaning key to provide convenient access to inside the drain.





According to the Spanish Technical Building Code, general maintenance and cleaning must be carried out every 6 months.



TECHNICAL SPECIFICATIONS



Component: **LEVEL TERRACE DRAIN**

- Materials: high-performance polyurethane.
- Water intake area: 200×200×55 mm
- Horizontal outlet tube: Ø 50 mm.
- Flow rate: 0.68 L/s.

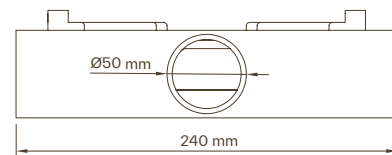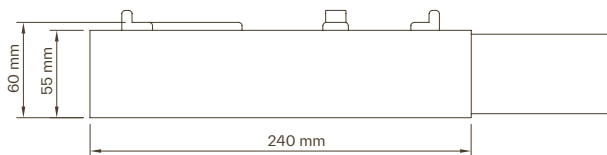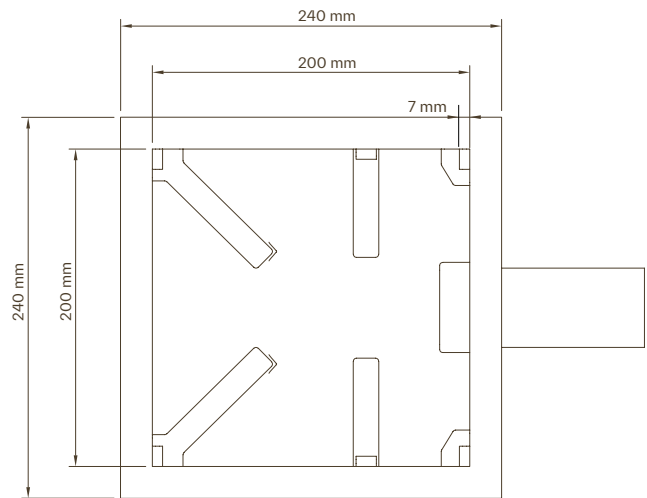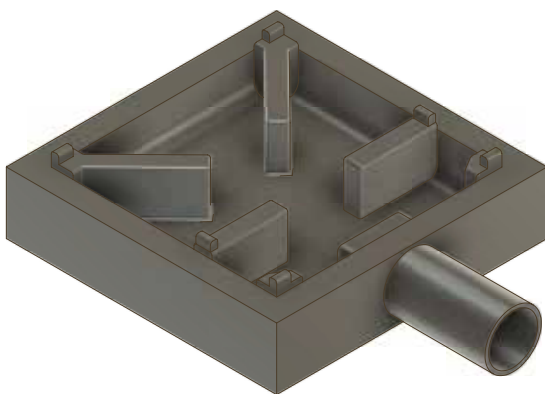

Component: **ECODRY50 PERIMETER MEMBRANE**

Environmentally responsible membrane heat-sealed around the drain's perimeter for the treatment and waterproofing of terraces and balconies. Made from a high-performance thermoplastic polyolefin membrane CPE (EVA-based circular polymer) that is produced by transforming and treating raw materials obtained from the circular economy which are then extruded over polyester fibres.

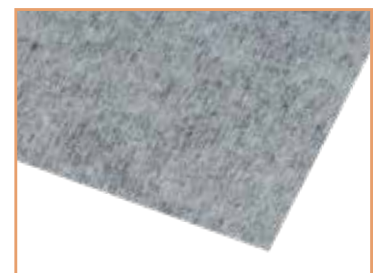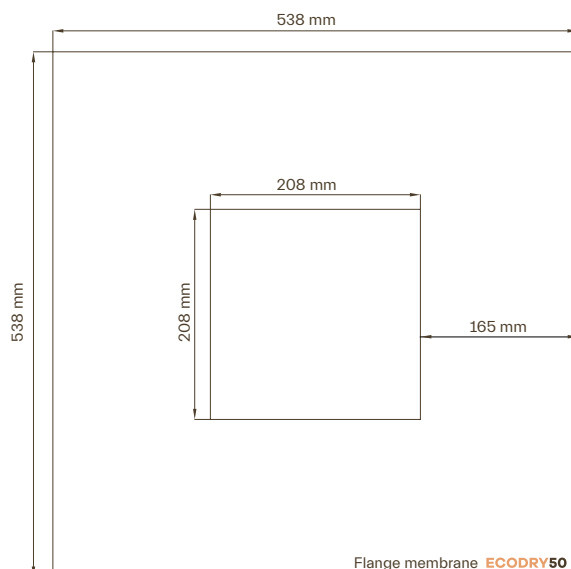

1170/014-DdP-2022/09/09
EN 13956:2012



UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301

MORE INFO:
www.revestech.com

This image shows a full page of white paper with horizontal blue or grey ruling lines, typical of notebook paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

**HAPPY SPACES
WELL RESOLVED**





JOINT

STRIPS FOR JOINTS ARTIFICIAL GRASS SPORTS FACILITIES FOOTBALL PITCHES PROFESSIONAL SPORTS FIELDS WITH DEMARCATIION LINES

JOINT & JOINT S: waterproof multilayer geotextile strips composed of thermoplastic polyolefins. Both are highly effective in the installation of artificial grass with high tensile strength, good adhesion to the glue and protection against moisture in any type of installation, both decorative or sport. Being waterproof, **JOINT & JOINT S** prevent the grass from adhering to the base, while protecting the adhesive from the action of moisture remaining in the base, thus avoiding the deterioration of the bond. Due to their composition, they are rot-proof. They are not attacked by bacteria or mould and maintain their effectiveness indefinitely.

PRODUCT

Code	Product	Roll
544011363	JOINT Reinforced strip for joints for sports facilities or small football pitches.	Roll 30 cm x 100 m
544011370	JOINT-S Double-sided reinforced strip for joints for professional sports fields with demarcation lines.	Roll 30 cm x 100 m

FORMAT



CHARACTERISTICS


JOINT



Polyethylene mesh

CPE
(EVA-based
Circular Polymer)

Polyester fibres

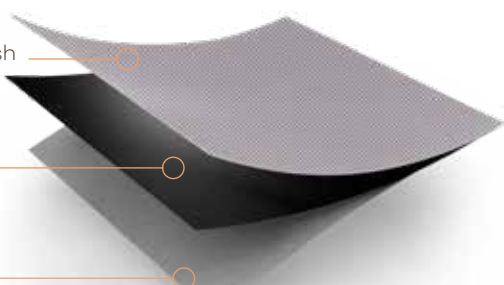

JOINT-S




Polyester fibres


Polyethylene mesh

CPE
(EVA-based
Circular Polymer)

Polyester fibres

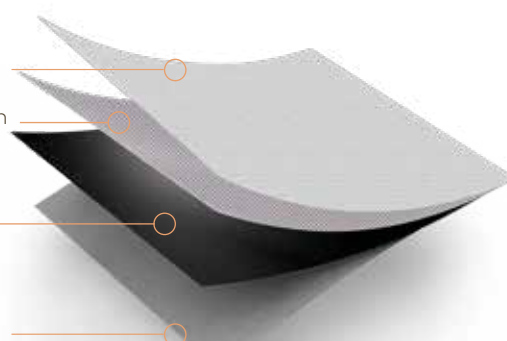

INSTALLATION

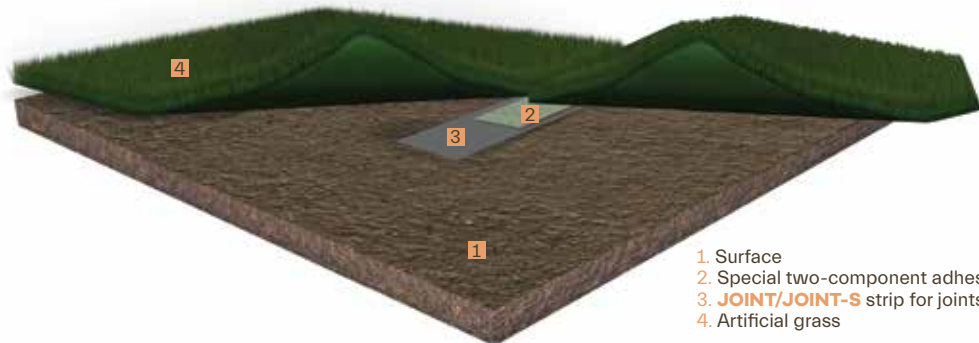

1. Surface
2. Special two-component adhesive for grass
3. **JOINT/JOINT-S** strip for joints
4. Artificial grass

* MATERIALS ONLY USED TO MAKE ARTIFICIAL GRASS JOINTS

- Handle with care to avoid perforations or tearing. In case they occur, repair with adhesive tape.
- Extend **JOINT** over the area to be joined. Apply the adhesive and proceed with bonding according to the manufacturer's recommendation.
- When using **JOINT** and **JOINT-S**, together, use **JOINT-S** tape, which can adhere on both sides, for joining the grass. For laying marking lines, which should only stick on one side, use **JOINT** tape.
- Splices (end of the roll) can be made by overlapping and joining the tape by nailing, stapling, or using adhesive tape.
- Keep in its original packaging until ready for use. **JOINT** is not protected against ultraviolet rays, so prolonged exposure to sunlight should be avoided until installation.
- Store in a cool, dry place protected from direct sunlight. Properly stored, its characteristics remain unchanged over time.

TECHNICAL DATA SHEET

Characteristics	Test	JOINT	JOINT-S
Thickness (mm)	EN 1849-2	0,5	0,6
Weight (gr./m ²)	EN 1849-2	240	290
Tensile strength (N/5cm)	EN 12311-2	L>340 / T>235	L>430 / T>290
Shear strength of the joint	EN 12228 Meth.2 EN 13744	34	
Elongation (%)	UNE EN 12311-2	16	27
Water resistance	UNE EN 1928 - B	watertight	watertight
Operating temperatures		-20° a +70°	-20° a +70°
UV resistance		2 weeks	2 weeks

BECAUSE IT'S QUALITY.

The combined use of **JOINT** strips, with adhesive fibre on one side, and **JOINT-S**, with fibre on both sides, constitutes an improvement system in the installation of sports fields with marking lines.



Using **JOINT-S** for the grass joints and **JOINT** for the marking lines facilitates and ensures adhesion at the crossing points, saving time and ensuring quality in the installation.

- WATERPROOF TO WATER AND ADHESIVE
- GOOD DIMENSIONAL STABILITY
- GOOD RESISTANCE TO TEARING
- VERY REDUCED THICKNESS
- EASY CUTTING AND MANIPULATION
- GOOD ADHESION OF THE ADHESIVE
- FIBRE ON ONE OR BOTH SIDES
- ROT-PROOF, DOES NOT CREATE MOULD
- EASILY RECYCLABLE MATERIAL

BECAUSE IT'S SAVING.

- In time and labour, due to its easier and faster installation at the junctions with the marking.
- In repair costs due to moisture, for its lasting effectiveness.
- And for extending the lifespan of the installation in good condition.

ADVANTAGES

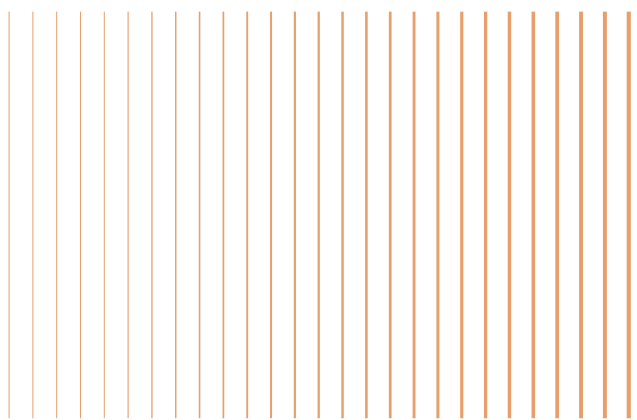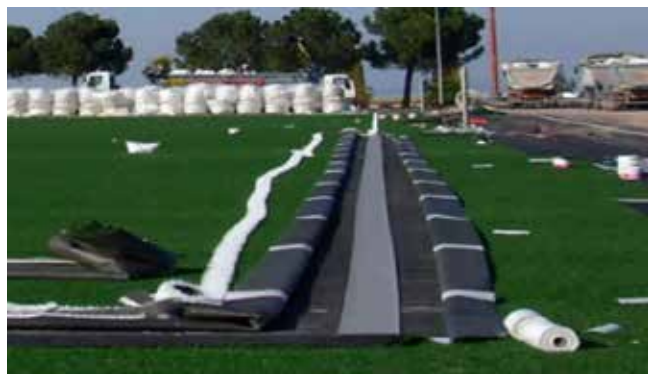

SUBWATER

EXCLUSIVE SYSTEM FOR INSTALLERS TRAINED AND APPROVED BY REVESTECH

For the waterproofing of swimming pools, Revestech offers a complete system based on the **SUBWATER KIT** and complemented with different add-ons and accessories of mandatory use, forming a system of high performance.

The watertightness of a pool goes further and requires superior training due to the very nature of the type of installation and to ensure that it can withstand a high hydrostatic pressure once in use. It is for this reason that this system is **EXCLUSIVE FOR INSTALLERS TRAINED AND APPROVED BY REVESTECH**. For this purpose, we offer free training, certified installer diploma, and technical advice by telephone and on-site assistance




FOR CERTIFICATIONS contact the Technical Department via email:
export@revestech.com

SUBWATER KIT


	596352360	KIT SUBWATER	WATERPROOFING MEMBRANE ECODRY120 20 Roll of 1,5 m x 20 m · 30 m ²	FOR EXTERIOR SURFACES UP TO 30 m ²
			SEALING STRIP FOR JOINTS AND PERIMETER ECODRY BANDA 13X30 Roll of 12,7 cm x 30 m (1 unit)	
 ADHESIVE AND PRIMER			KIT POOL: SPECIAL FOR SEALING JOINTS AND EDGES: 1. ADHESIVE: TOPPLUS 6 2. PRIMER: PRIMERPOOL Roll of 12,7 cm x 30 m (1 unit)	

SOME SYSTEM ADD-ONS:

	596351912	ECODRY CORNERIN	2 units per bag	INTERIOR AND EXTERIOR ANGLES
	596351929	ECODRY CORNEROUT	2 units per bag	
	596351936	ECODRY TUB 50	1 unit per bag	REINFORCEMENT FOR PIPES
	596351943	ECODRY TUB 63	1 unit per bag	
	544010045	ECODRY TUB 75	1 unit per bag	
	596351950	ECODRY TUB 90	1 unit per bag	
	596352018	ECO CORNER BAND	Roll of 30 m x 12,7 cm (1 unit)	JOINTS AT 90°
	544015323	REVESTECHFLEX	Cartridge of 300 ml	SPECIAL ADHESIVE FOR JOINTS




DESIGNER SHOWERS

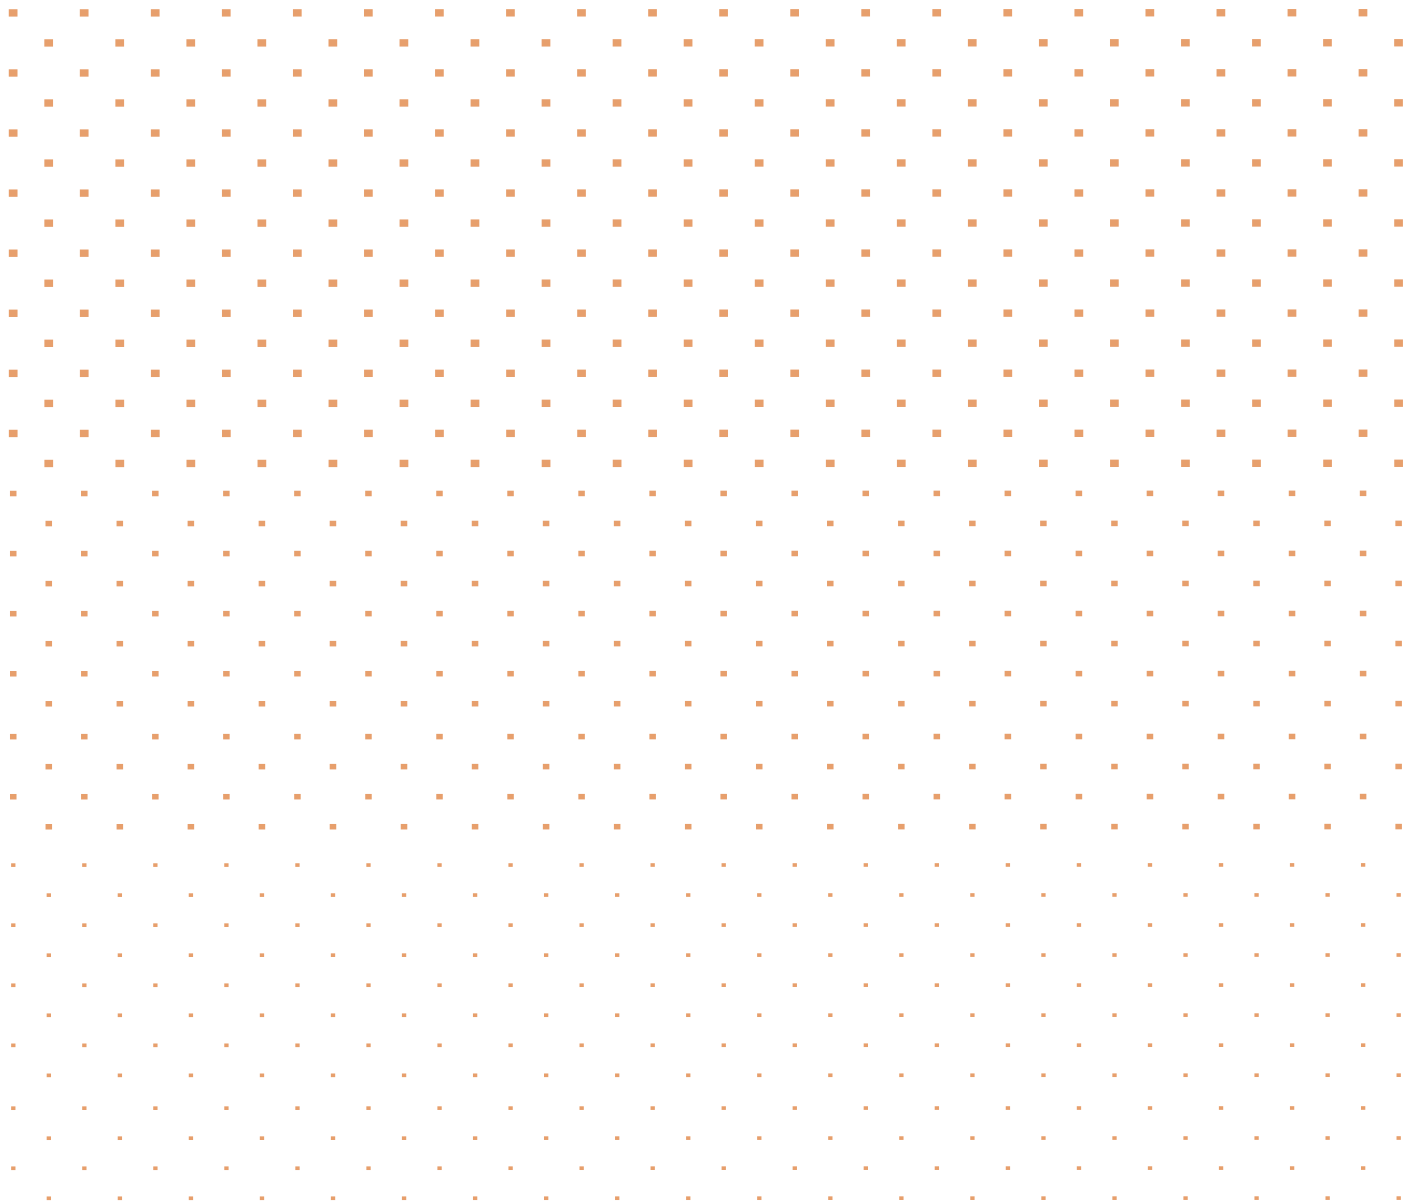


Having a shower that you love is another level: Design that reflects your style, efficiency in every drop and waterproofing that guarantees an environment without concerns. And above all, it makes showering, a unique sensory experience.



FACES THAT SAY IT ALL

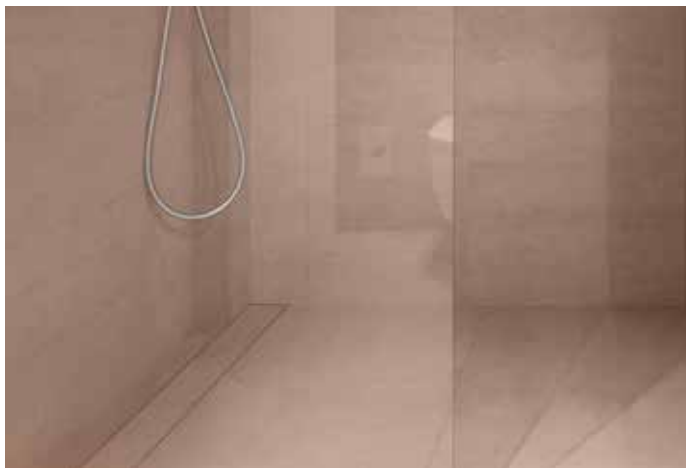

TYPES OF DRAINS.....	96
LEVEL SHOWER TRAY	100
LINEAR LEVEL	114
SUMI LEVEL	118
SECRET WALL LEVEL	124
DRY50 LINEAR TILEABLE	128
DRY50 LINEAR MICROCEMENT	132
DRY50 LINEAR	136
DRY50 SUMI LUXE	140
DRY50 LINEAR SLIM TILEABLE	144
DRY50 LINEAR SLIM	148
SUMI BASIC	150
LINEAR BASIC SQUARES	152
LINEAR BASIC DUO	154
TRENDY STANDS COLLECTION	156

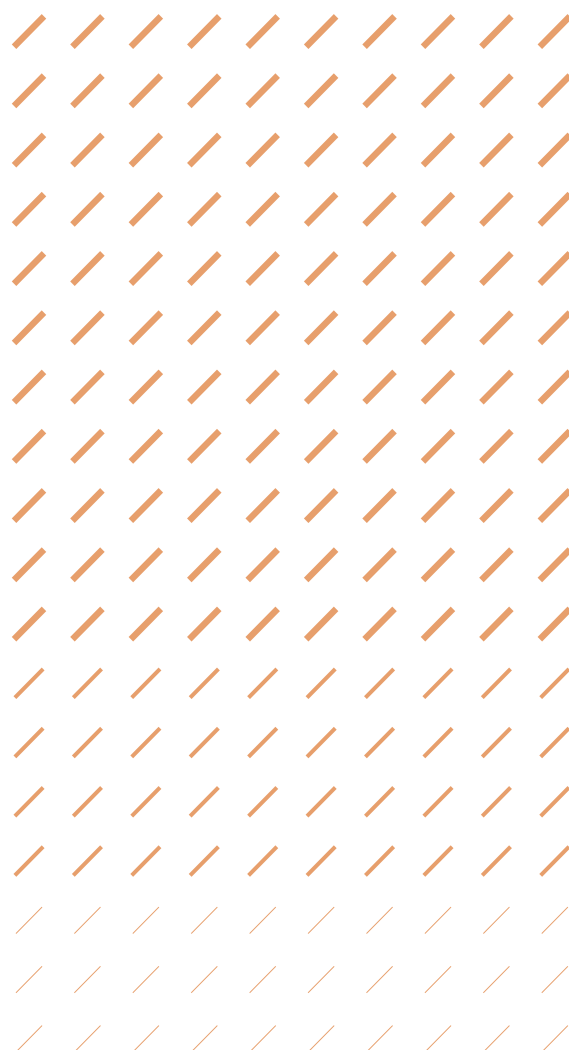

TYPES OF DRAINS

DRAINS **LEVEL** SYSTEM



LEVEL drains


Siphonic drain (convertible into non-siphonic) for the LEVEL invisible shower tray that incorporates HORIZONTAL outlet (40 mm). It is placed centred on the tray and is repositionable 360°.

_drain installation height: **60 mm**

_outlet: **horizontal Ø40 mm**

_evacuation: **0,58 litres/second**

_composition: **polypropylene**

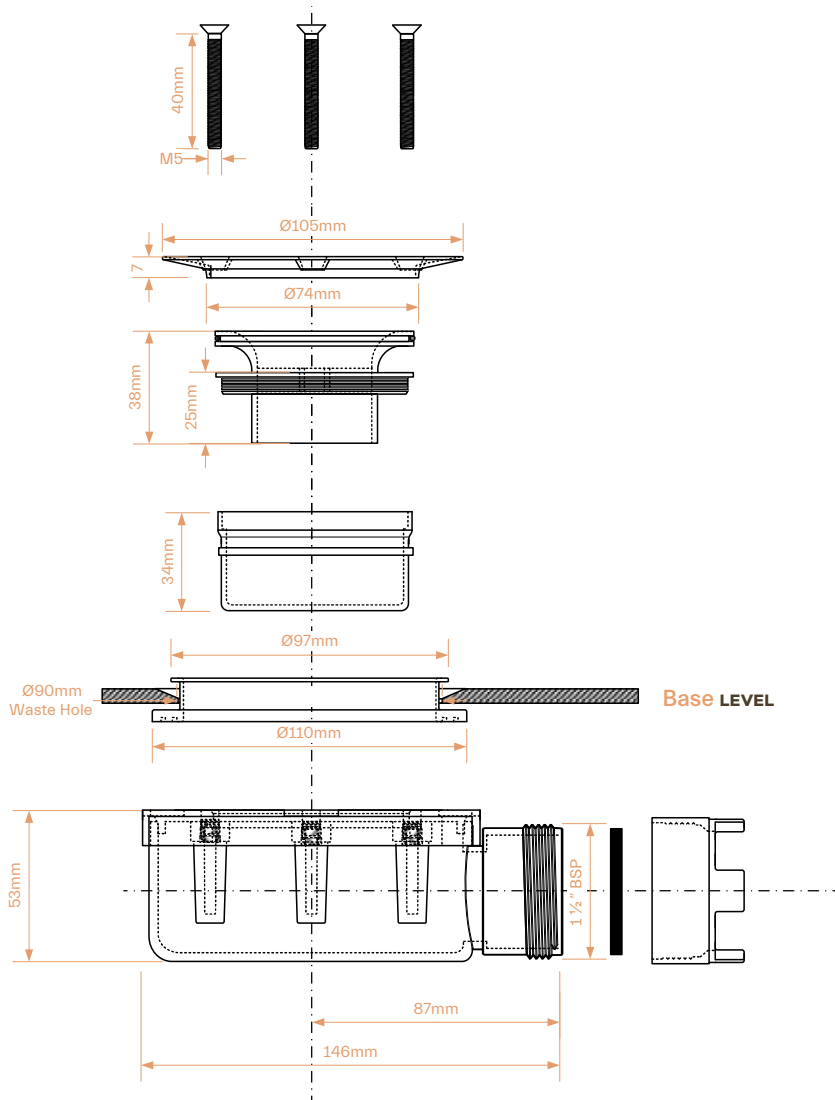

LEVEL drain	test method	unit	value
Outlet			Horizontal
Outlet diameter		mm	40
Flow rate	Flow rate according to standard UNE-EN 274	l/s	0,58
Composition			polypropylene

DRAIN FOR **DRY50 SLIM** AND **BASIC LINE** KITS



NOVO drain

Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 1.5 x 2 m **DRY50** waterproof membrane EVAC type heat-sealed to the cover.

- _drain height: 60 mm
- _outlet: horizontal Ø40/50 mm
- _evacuation: 0,6 litres/second
- _composition: ABS grey



NOVO drain	test method	unit	value
Outlet			Horizontal
Outlet diameter		mm	50
Flow rate	Flow rate according to standard UNE-EN 274	l/s	0,60
Composition			ABS

TYPES OF DRAINS

DRAINS FOR **DRY50** KITS (except **DRY50 LINEAR SLIM**)



PREMIER drain


Shower siphonic drain kit (convertible into non-siphonic) that incorporates VERTICAL and HORIZONTAL outlet (50–40 mm), with **DRY50** waterproof membrane EVAC type heat-sealed to the base to guarantee the total watertightness of the most critical point.

Manufactured according to EN-274 and EN-1329.1, guaranteeing, in addition to its high quality, that the evacuation of waters is sufficient, continuous and with the water seal required by the CTE for new construction.

_drain height: **82 mm**

_outlet: **vertical and horizontal Ø40/50 mm**

_evacuation: **0,9 litres/second**

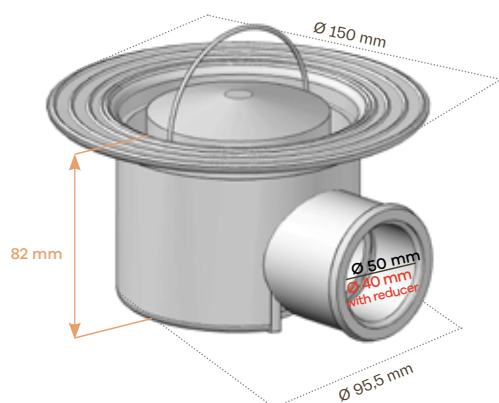

PREMIER drain	test method	unit	value
Height		mm	82
Outlet			Horizontal and vertical
Outlet diameter		mm	40/50
Flow rate		l/s	0,90
Joint with pipes	adhere with PVC adhesive		
Effects of chemical products	Stable to products normally used with ceramic tiles, in cleaning and maintenance.		
Composition	Body and drain: PVC with anti-UVA stabilizer additive		
Height of the water seal	EN-274	mm	50

These accessories are dimensionally manufactured according to the UNE EN 1329-1 standard and comply with the requirement of the CTE (EN-274) in terms of height of the water seal.




FLAT drain

Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet (50–40 mm), with **DRY50** waterproof membrane EVAC type heat-sealed to the cover of the base.

The new system of watertight sealing of the membrane to the cover of the base guarantees total watertightness, preventing errors during the installation of the drain. In addition, it allows to rotate the base 360°, to facilitate the connection with the drain pipe.

- _drain height: 65 mm
- _outlet: horizontal Ø40/50 mm
- _evacuation: 0,5 litres/second

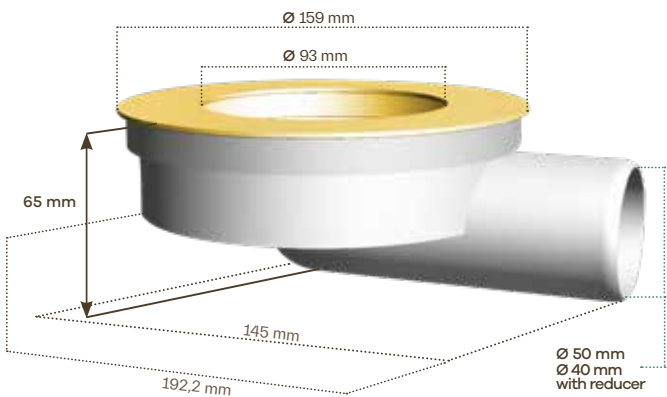


FLAT drain	test method	unit	value
Height		mm	65
Outlet			Horizontal
Outlet diameter		mm	40/50
Flow rate	ISO TC 138/SC 1604	l/s	0,50
Load and deformation resistance	ISO TC 138		
Effects of chemical products	Stable to products normally used with ceramic tiles, in cleaning and maintenance.		
Composition	Body and drain: ABS		




LEVEL SHOWER TRAY

hidden slopes

The prefabricated **LEVEL** shower tray, is invisible because it is covered by the chosen tiles. The final aesthetics, is a shower floor totally flat and at the same level with the rest of the bathroom. The slopes of the shower remain hidden under the tiles, receiving the water that filters through the joints, and that evacuates finally through the drain. Includes horizontal siphonic drain, located at the center of the tray and repositionable 360°. An innovative system in integrated showers that adapts to any style. Versatile and efficient



PATENT NUMBER: ES 2585849

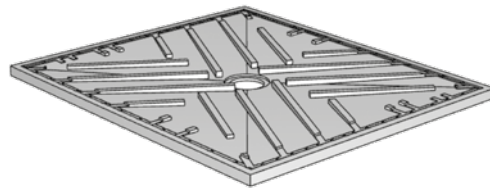

SPECIAL
**reduced
mobility**



CONDITIONS TO BE FULFILLED:
Non-slip floor
(according to UNE 41901:2017 EX).



INSTALLATION VIDEO

revestech®

LEVEL SHOWER TRAY

revestech®

LEVEL drain.

Consult technical information on page: 96.



PATENT NUMBER: ES 2585849

1. tray
2. siphonic drain
3. **ECODRY BAND 13x5** waterproof perimeter strip
4. wall trim piece (optional)
5. supports for tiles
6. **REVESTECHFLEX** adhesive
7. installation protector
8. cleaning key

DESCRIPTION

Complete kit for the construction of a flat shower tray, 100% watertight, to interlock, indicated to cover the whole shower with the same tiles, without slopes or steps, with evacuation of water through the joints on the floor.

Versatility: It allows the installation of various tile formats provided that at least one of the dimensions of the tray, either the width or length, is covered (as convenient). Preferably porcelain floor tiles.

Cleaning: The **LEVEL SHOWER TRAY**, in addition to having an antibacterial and fungicide sanitary treatment, has a system to lift the tiles easily, allowing access to the interior of the tray and the drain siphon.

Maintenance: It has a system of supports to lift the tiles, allowing access to the interior of the tray and the drain siphon. For the cleaning of the chosen covering, follow the instructions from the manufacturer.

Insulation impact noise: The 4 mm perimeter joint isolates the tray in all its meeting points, attenuating the transmission of impact noise.

_construction height: **86 mm**


_outlet: **horizontal Ø40 mm**

_evacuation: **0,5 litres/second S/UNE-EN 274**

_composition: **high-performance polyurethane**

Advantages

- Invisible.
- Waterproof.
- Fully flat.
- Acoustic insulation.
- With antibacterial and fungicide treatment.

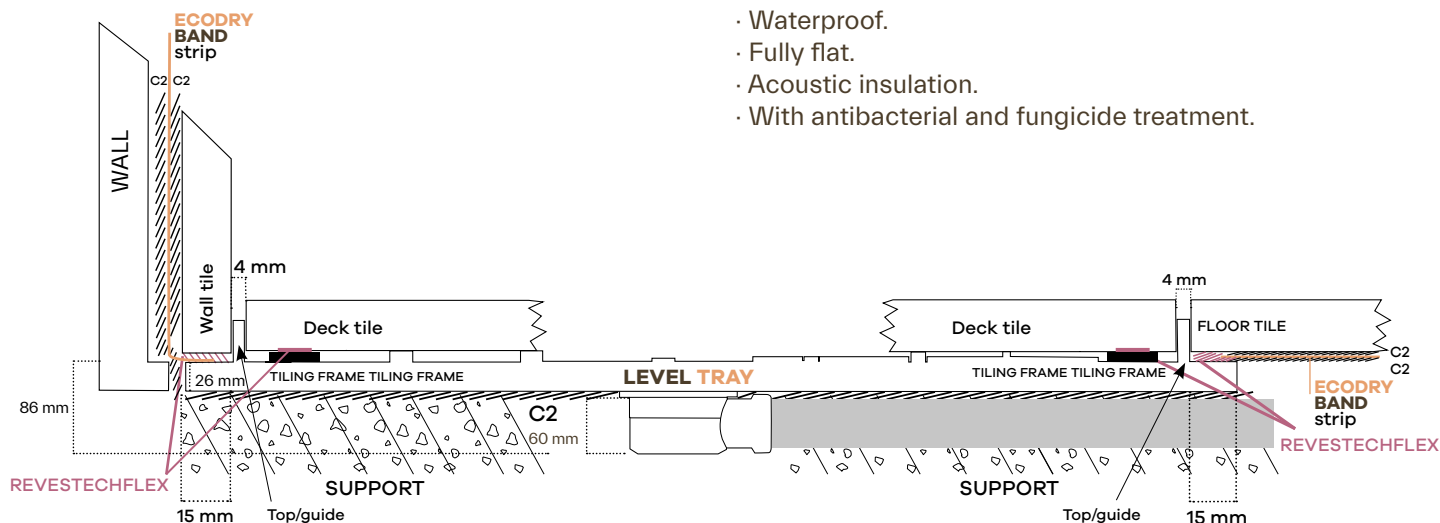

The tiles used to cover the tray should have the essential characteristics suitable to meet the requirements relating to CE marking in the shower trays category.

The flooring tiles must have the following characteristics:

THE LENGTH OF THE TILE SHOULD BE, AT LEAST, THE SAME AS THE NARROWEST PART OF THE LEVEL TRAY. IN NO CASE THE PIECE CAN BE SHORTER.

- Dimensions: 3.8 cm less than the edges of the tray in the direction that the tiles are being placed.
- Minimum breaking force: 1100 N (test according to ISO 10545-4).
- Minimum thickness: 7,5 mm.
- The tiles chosen should preferably be porcelain tiles.



COMPONENTS



1. TRAY

_height:

26 mm



_material:

high performance polyurethane

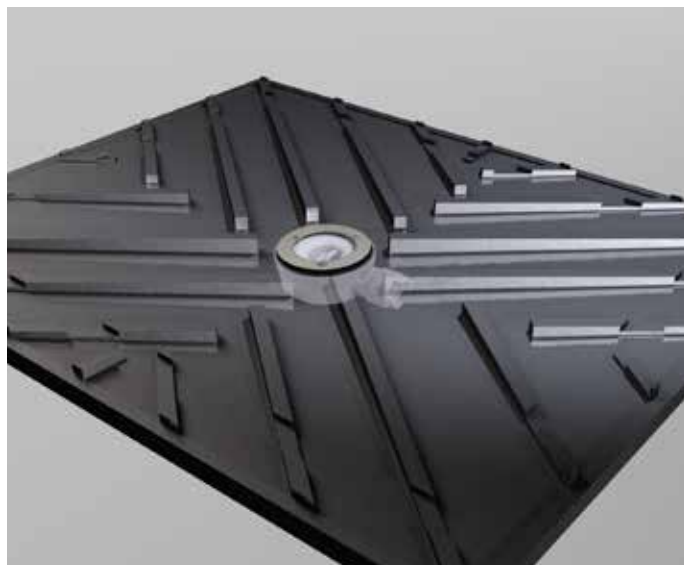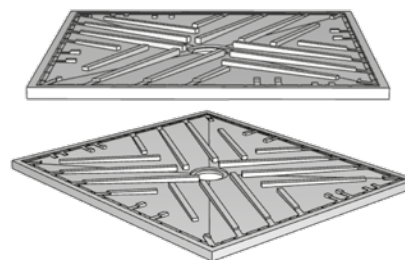

Top view

Bottom view

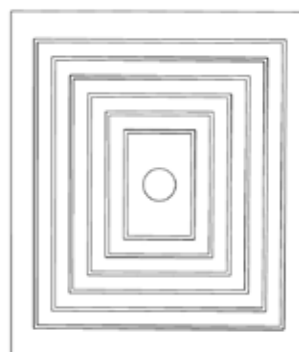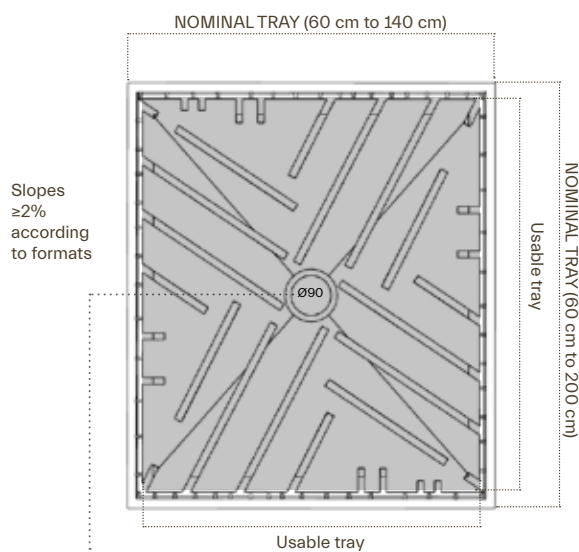


It has dovetail grooves to improve C2 S1/S2 tile adhesive anchoring.



- NOMINAL TRAY: outer dimensions for which the tray should be ordered.
- USABLE TRAY: 3,8 cm less than the nominal ones (1,5 of eaves + 0,4 cm of stopper to ensure evacuation x2) for each dimension. These are the dimensions the shower area will really have.
- Maximum nominal dimensions 140 x 200 cm.

Side view



Sectional drawing of one of the slopes





2. SIPHONIC DRAIN


LEVEL SHOWER TRAY siphonic drain (convertible into non-siphonic) that incorporates HORIZONTAL outlet (40 mm). It is placed centred on the tray and is repositionable 360°.

_drain installation height: 60 mm

_outlet: horizontal Ø40 mm

_evacuation: 0,5 litres/second S/UNE-EN 274

_composition: polypropylene

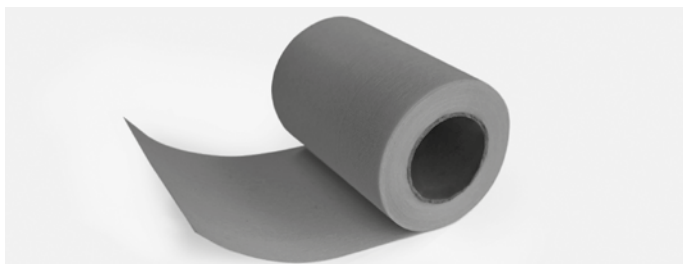

3. PERIMETER STRIP

0,13 x 5 m **ECODRY BANDA 13x5** strip for joints for the treatment and waterproofing of meeting points with horizontal and vertical structures.



4. WALL TRIM PIECE

14 mm x 14 mm compact PVC trim. Act as a finishing piece for a better finish. Its dovetailed underside, helps the grip of **REVESTTECHFLEX** adhesive. 2 units of the longer size of the tray are included.




5. TILE HOLDERS

PVC supports that serve to hold the tiles to the tray. They prevent the movement of the pieces and facilitate their lifting for cleaning. 2 units of the largest size of the tray are included.



6. REVESTTECHFLEX ADHESIVE

Modified silane-based adhesive, of high performance, for the adhesion of tiles on the profiles and of the perimeter strip on the eaves of the tray (cartridge of 300 ml.)

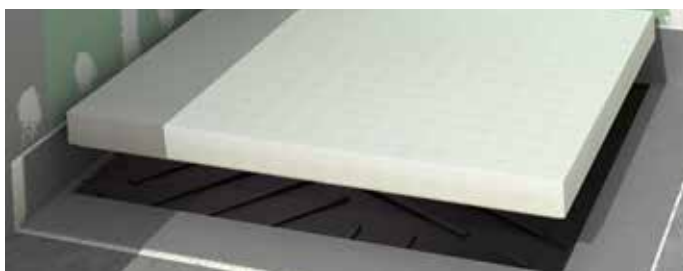


7. INSTALLATION PROTECTOR

Low density EPS protective plate, to avoid the deterioration of the tray during the installation phase.




8. CLEANING KEY

Tool made of stainless steel AISI 304, to facilitate the lifting of the ceramic tiles.

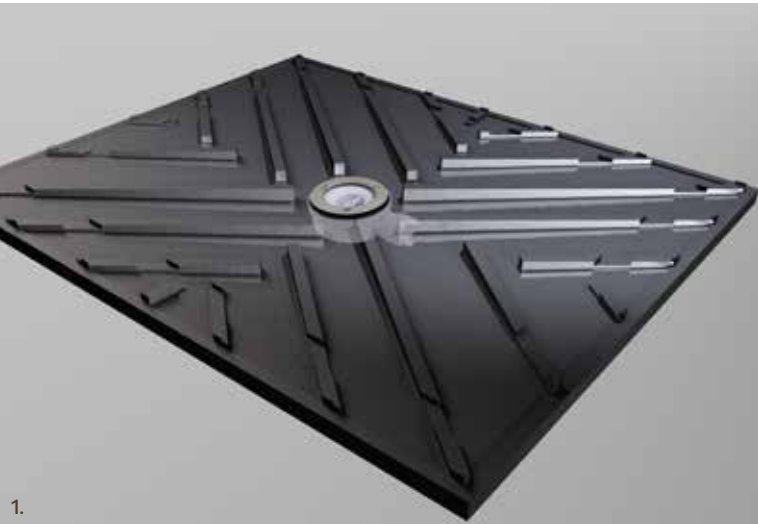

Reference	product	size
544015941	LEVEL SHOWER TRAY 60x100	60 x 100 cm
544015200	LEVEL SHOWER TRAY 70x90	70 x 90 cm
544015958	LEVEL SHOWER TRAY 70x100	70 x 100 cm
544015965	LEVEL SHOWER TRAY 70x120	70 x 120 cm
544015156	LEVEL SHOWER TRAY 80x90	80 x 90 cm
544015224	LEVEL SHOWER TRAY 80x100	80 x 100 cm
544015231	LEVEL SHOWER TRAY 80x120	80 x 120 cm
544015972	LEVEL SHOWER TRAY 80x140	80 x 140 cm
544015248	LEVEL SHOWER TRAY 90x90	90 x 90 cm
544015255	LEVEL SHOWER TRAY 90x100	90 x 100 cm
544015194	LEVEL SHOWER TRAY 90x120	90 x 120 cm
544015989	LEVEL SHOWER TRAY 90x140	90 x 140 cm
544015309	LEVEL SHOWER TRAY 100x100	100 x 100 cm
544015316	LEVEL SHOWER TRAY 100x120	100 x 120 cm
544015996	LEVEL SHOWER TRAY 100x140	100 x 140 cm

Ceramic integrated tray, with horizontal siphonic drain (1), convertible into non-siphonic.
Includes: **ECODRY BAND 13x5** waterproofing perimeter strip (2), wall trim pieces (3), supports for tiles (4), **REVESTTECHFLEX** adhesive (5), protector for installation (6) and key for cleaning (7).

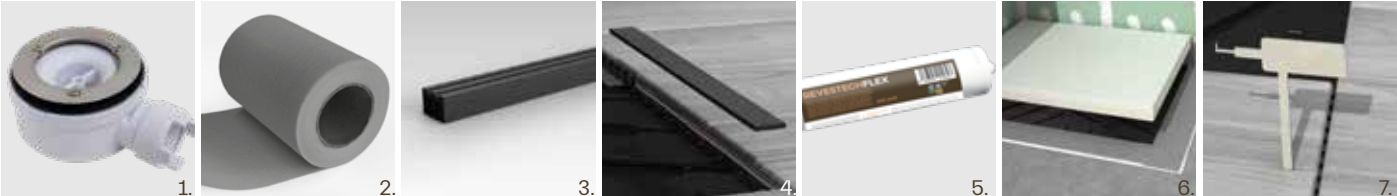

Customized manufacturing on request
Custom-made shower trays from 60 cm to 140 cm wide and from 90 cm to 200 cm long.



- 1. LEVEL SHOWER TRAY
- 2. Drain
- 3. Tile holders
- 4. Covering
- 5. Cleaning key

TECHNICAL DATA SHEET

LEVEL SHOWER TRAY	Standard	Unit	Value
FILLING MATERIAL: Fire Classification	EN 13501-1		E
SHOWER TRAY COVERING: Flammability test	DIN 4102-98 part 1		B2
Compressive strength without covering	EN 826	kPa	2000
E-Modulus	EN 826	kPa	55000
Tensile strength	EN 1607	kPa	1500
E-Modulus	EN 1607	kPa	40000
Transverse tensile strength	EN 12089	kPa	2500
Shear module	EN 12090	kPa	600
Thermal conductivity 10°C	EN 12667	W/mK	0,030*
Usage limit temperatures		°C	-70 +130


*Thermal conductivity values have been defined with EN 12667 in 6 weeks at 10°C average temperature.

Test	Standard	Results
WATER VAPOUR TRANSMISSION (Determination of properties)	UNE-EN 1931:2001	$\mu = 2496$
WATERTIGHTNESS	EOTA TR003	Watertight
RESISTANCE TO MECHANICAL DAMAGE Resistance to dynamic punching shear	EOTA TR 006	No breakage
RESISTANCE TO MECHANICAL DAMAGE (punching shear) Resistance to static punching	EOTA TR 007	No breakage
RESISTANCE TO FATIGUE	EOTA TR 008	No breakage
RESISTANCE TO THE EFFECTS OF LOW TEMPERATURES (-10°C) Dynamic punching shear	EOTA TR 006	No breakage
MECHANICAL RESISTANCE Resistance to heat ageing (200 days at 70°C) - (dynamic punching shear)	EOTA TR 011	No breakage
RESISTANCE TO FATIGUE Resistance to heat ageing (200 days at 70°C)	EOTA TR 011 and EOTA TR 008	No breakage
RESISTANCE TO WATER AGEING Resistance to ageing (punching shear)	EOTA TR 012 and EOTA TR 004	No breakage

Resistance to chemicals	Exposure one week at room temperature
Ethanol, alcohols	No apparent damage
Gasoline, diesel	No apparent damage
Toluene, xylo	Not recommended
Water 82°C for 14 days	No apparent damage
Salt water at 10%, 50°C, 14 days	No apparent damage
Sulfuric, chlorohydric, phosphoric acids (< 10%)	No apparent damage
Sodium and potassium hydroxides (5%)	No apparent damage
Acetic acid < 10%	No apparent damage
DMF, acetone, THF	Not recommended

Essential characteristics	Benefits	Harmonised technical specifications		REVESTECH C/ La Rioja, 4 - 03006 ALICANTE - SPAIN 18 005-DdP-2018/11/12 EN 14527:2016 LEVEL SHOWER TRAY Domestic use, for personal care
Cleaning capacity	Class 1	EN 14527:2016		
Durability	Class 1	EN 14527:2016		

The diagram below shows an overhead view of the joints on the **LEVEL TRAY**.

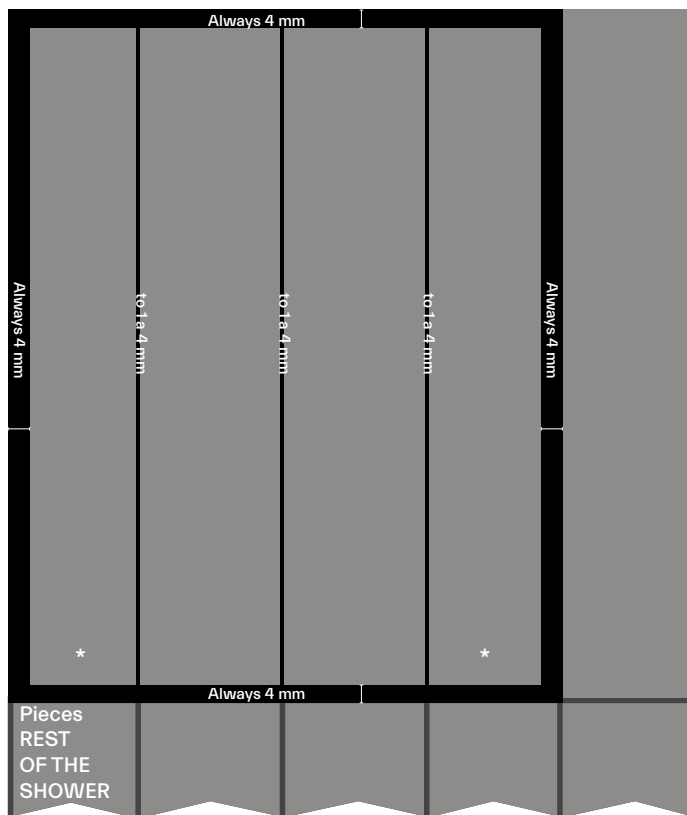

A_several tiles

Joints on the **LEVEL SHOWER TRAY**


Perimeter joints:

Remember that the perimeter of the tiles on the level shower tray, should always have a 4mm joint in its 4 sides.

Joints between pieces:

Except for the case in which there is a single tile, the joints between pieces must be 1 to 4 mm.

* In case of using the same tiles throughout the bathroom, the tiles at the ends of the level tray, should be cut lengthwise, to make all the joints match (see diagram).

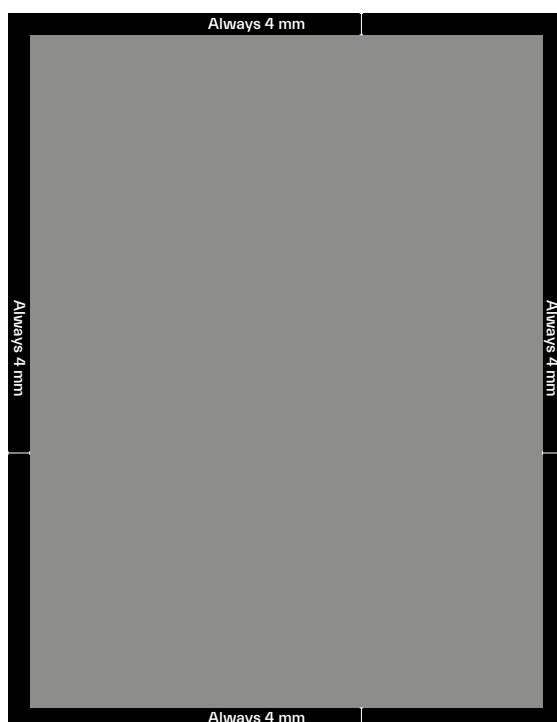

B_single tile


Perimeter joint:

The perimeter of the single tile of the level tray, has always a 4 mm joint.


MEETING POINTS

SHOWER TRAY MEETING POINTS

Detail of the meeting points of the edge of the tray with the **WALL COVERING**.

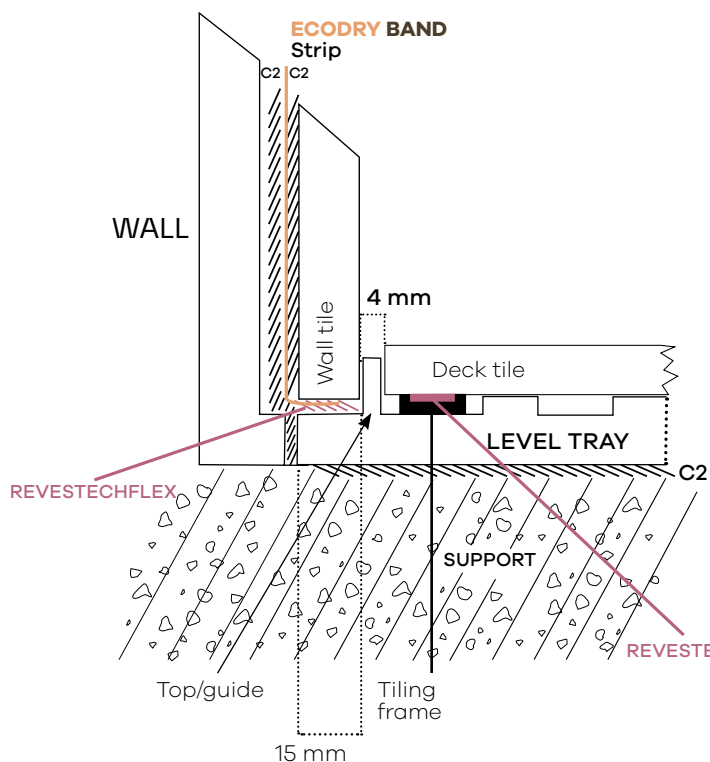


Detail of the meeting of the edge of the tray with the covering of **THE REST OF THE SHOWER**.

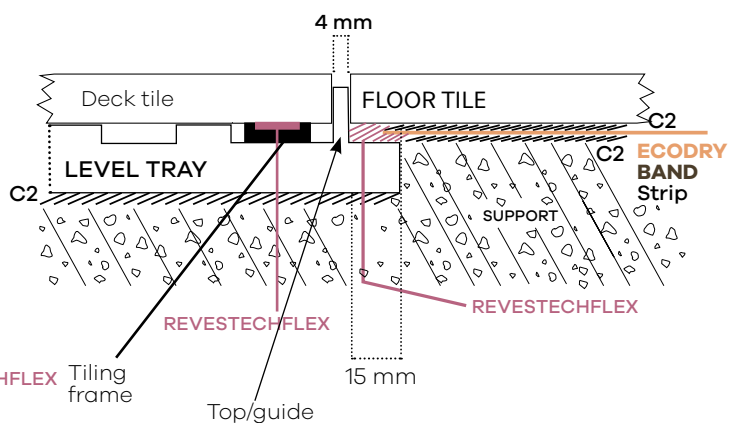


OPTIONAL: wall trim pieces.

If for the characteristics of installation, you do not want to directly lay the tiles on the tray, adhere the trim piece, on the flat area of the eaves of the tray (meeting points with the walls only).




Detail of the meeting point of the edge of the tray with the **SCREEN**.

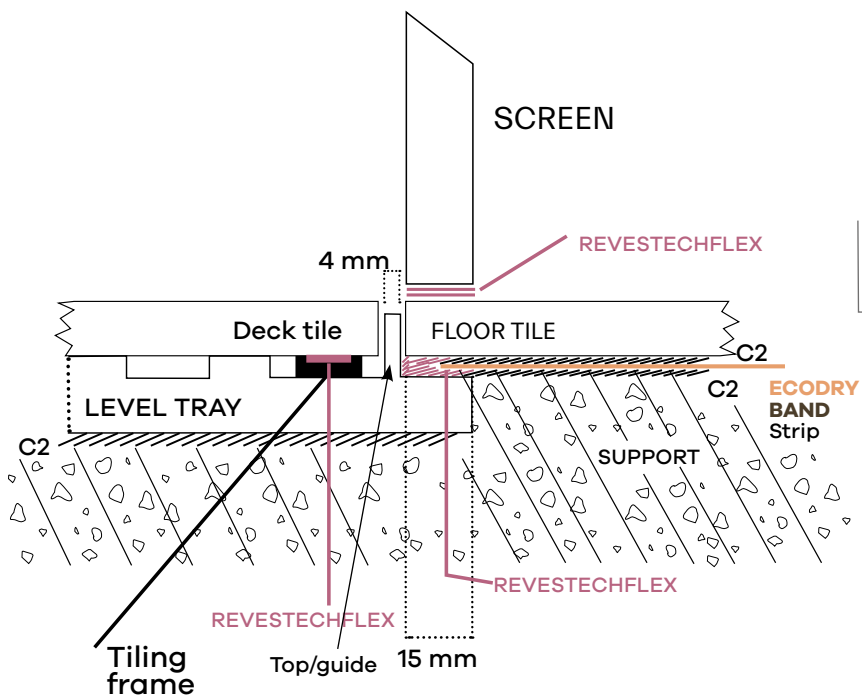


OPTIONAL: embedded screen

If for the characteristics of installation, the screen must be embedded, here is a constructive detail of the installation.




LIFTING OF THE TILES


A_SEVERAL TILES_HORIZONTAL placement

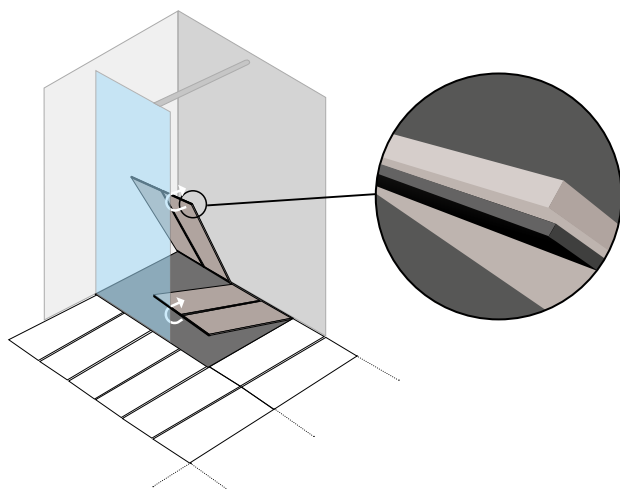


B_SEVERAL TILES_VERTICAL placement

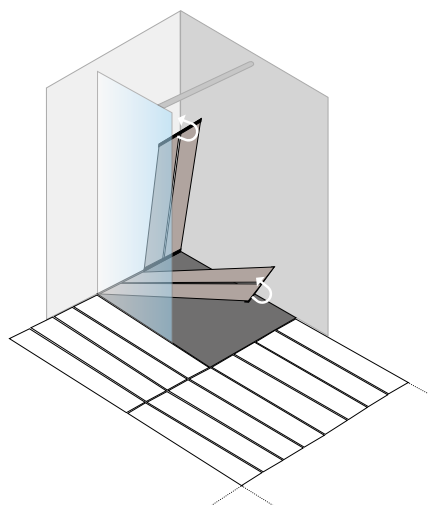

C_SINGLE TILE_HORIZONTAL placement of the covering

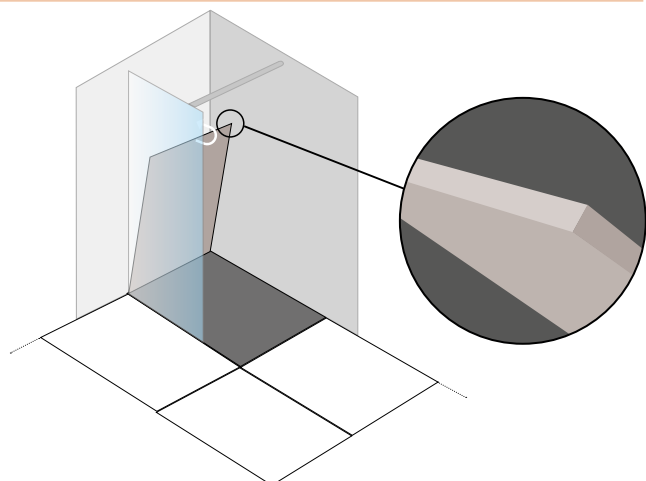


D_SINGLE TILE_VERTICAL placement of the covering

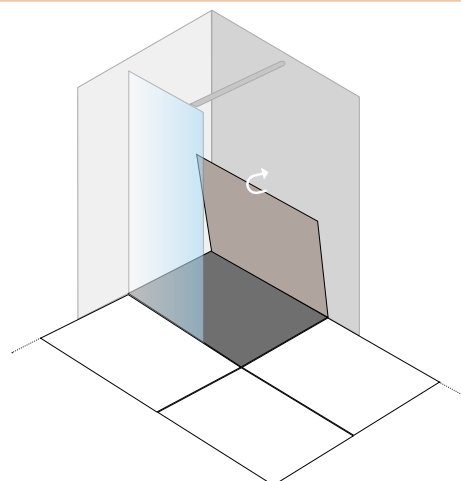

IMPORTANT


1. POSITION OF SUPPORT.

Once the tile has been lifted with the help of the key, remove the key and lean the tile against the wall making a **90° TURN**.



2. SECURITY POSITION.

Then we push the bottom of the tile until it reaches the security position, where it is held by the grooves on the PVC profiles (green line). **98° TURN**.



PLACING THE TILES ON THE SHOWER TRAY

Given the weight of the tiles, for easy lifting when cleaning the level tray, one or more tracks must be made, depending on the **size of the LEVEL SHOWER TRAY**, as well as the **size and layout of the tiles** to be installed.

The tracks are made by laying out the ceramic tiles on the level tray. Always taking into account the joints, we cut the profiles in one or more sections, dividing the floor of the tray into two or more tracks.

- Depending on the **size of the tiles**, we will make one or more tracks (**images 1, 2 and 3**).

- Depending on the **layout of the tiles**, the number of tracks may also vary (**images 4 and 5**).

depending on the **size of the tiles**



image 1

1 track
1 tile

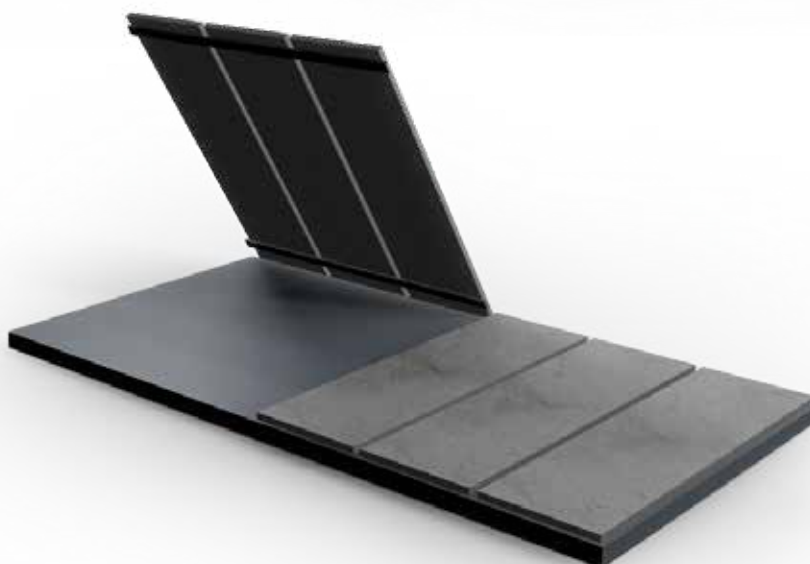


image 2

2 tracks
6 tiles



image 3
3 tracks
12 tiles

depending on the layout of the tiles



image 4
2 tracks
4 tiles




image 5
3 tracks
6 tiles

INSTALLATION STEPS



LAYOUT OF THE WALLS

1. Once verified the placement of the bathroom covering and its thickness, the **LEVEL SHOWER TRAY** can be placed in contact with the wall or separated from the it, it depends on the thickness of the tiles and the amount of adhesive that we will employ to adhere them. The most important thing is to establish the position of the tiles or of the trim piece (INCLUDED) that is just behind the stoppers on the tray

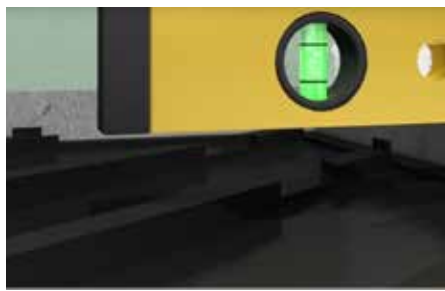

MEETING POINT OF THE TRAY WITH THE FLOOR

2. The flat part of the eaves of the **LEVEL SHOWER TRAY** must always be level with the structure.



3. The tiles of **LEVEL SHOWER TRAY** must be at the same level as the tiles of the rest of the bathroom. To do this, take the levels with the tiles pre-installed on the **LEVEL SHOWER TRAY**.



POSITION OF THE DRAIN

4. The exact position of the drain is determined by step 1. Mark it.



CONNECTION OF THE DRAIN

5. Connect the drain. The pipe should have a slope $\geq 2\%$. Check the correct evacuation.



6. Taking into account the height levels taken in step 3 make the mortar base. It is necessary to leave enough space to be able to adjust the drain.



7. Once the mortar is set, apply C2 adhesive. Apply it on the reverse of the tray as well (double adhesion). Install.



8. Create a strip of **REVESTCHFLEX** adhesive on the inside of the lip-type joint.



9. Seal to the outlet of the Level base by pressing to distribute the adhesive. Ensure that the thickest part of the joint is downwards. Do not wait for it to dry for the next step.



10. Create a strip of **REVESTCHFLEX** along the perimeter of the top of the base.



11. Install the Level base immediately over the fresh adhesive.



12. Place the metal ring, insert the screws and screw until completely sealing the ring at the outlet of the tray.



INSTALLATION OF THE SHOWER TRAY

13. It is essential that the **LEVEL SHOWER TRAY** is completely flat. The ceramic pieces that are placed on it must be fully supported and stable on the ribs of the level tray itself.

To do this, the following adjustments and checks must be made: once the mortar layer has set. Always start levelling with the tiles pre-installed on top, until the tiles are fully seated.



14. Put weight on the **LEVEL SHOWER TRAY** distributing the loads well. It is very important to put the weight on top of the tiles, never directly on the tray. Check the level again. Wait for the adhesive to be fully set to remove the weight.



15. Once the adhesive is fully set, check again that all levels are correct.



16. Seal the perimeter of the tray with **REVESTECHEFLEX**.



17. To avoid staining the tray, put masking tape on the perimeter. Adhere the **ECODRY BAND 13x5** strip to the four eaves of the tray with **REVESTECHEFLEX** adhesive. Then adhere the **ECODRY BAND 13x5** strip on the meeting points with floors and walls, using C2 S1/ S2 adhesive.




18. Place the profiles on top of the tray, in the same position. Adhere the tiles to the profiles with **REVESTECHEFLEX** adhesive.




INSTALLATION OF THE BATHROOM FLOOR

19. Install the rest of the bathroom floor taking into account that its height has to be at the same level as the covering of the tray.

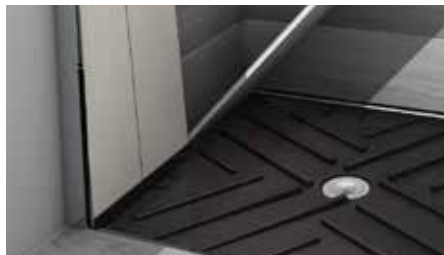

VERIFICATION OF THE INSTALLATION

20. Lift the tile and check that it remains stable in the security position. See page 107.

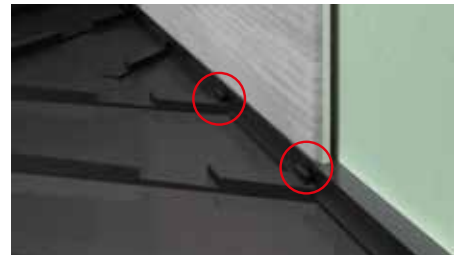

WALL TRIM PIECE

21. When all the bathroom walls are covered with the same ceramic tiles, and you don't want to cut all the pieces of the first row at the bottom to align with the same line, they should not be directly placed on the tray. Instead, they should be installed at the same height as the rest of the bathroom tiles to achieve the same level. To do this, place the **WALL TRIM PIECES*** between the tiles and the edge of the tray, right behind the **LEVEL SHOWER TRAY** stoppers.

LEVEL SHOWER TRAY INSTALLATION VIDEO





LINEAR LEVEL showers


hidden linear drain

The **LINEAR LEVEL** receives water through the slopes and evacuates it through the joints surrounding the flooring tiles until it reaches the level base and the drain. The characteristics are identical to those of the **LEVEL SHOWER TRAY**, except for the smaller dimensions and for being framed in a shower with slopes.

A new concept of invisible drain, comfortable in use and of distinguished aesthetics.



INSTALLATION VIDEO

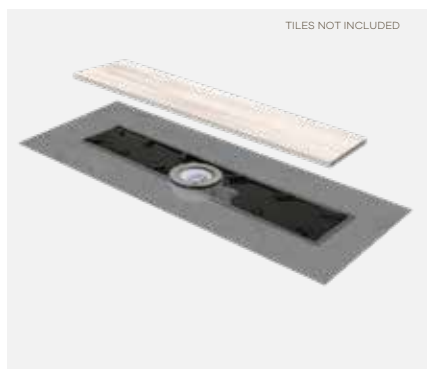

reference	product	size	piece space
544015552	LINEAR LEVEL 10x60	13,8 x 63,8 cm	10 x 60 cm
544015576	LINEAR LEVEL 10x70	13,8 x 73,8 cm	10 x 70 cm
544015583	LINEAR LEVEL 10x80	13,8 x 83,8 cm	10 x 80 cm
544015910	LINEAR LEVEL 10x90	13,8 x 93,8 cm	10 x 90 cm
544015705	LINEAR LEVEL 20x60	23,8 x 63,8 cm	20 x 60 cm
544015712	LINEAR LEVEL 20x70	23,8 x 73,8 cm	20 x 70 cm
544015590	LINEAR LEVEL 20x80	23,8 x 83,8 cm	20 x 80 cm
544015927	LINEAR LEVEL 20x90	23,8 x 93,8 cm	20 x 90 cm

Includes:

1. **LINEAR LEVEL** base with **ECODRY50** heat-sealed membrane
2. Level drain
3. 1,5 x 2 m **ECODRY50** membrane
4. Cleaning key
5. **REVESTTECHFLEX** adhesive



customized manufacturing on request

Consult with our commercial department.





SUMI LEVEL shower

hidden square drain

The **SUMI LEVEL** receives water from the four slopes, and evacuates it through the perimeter joints of the tiles. The characteristics are identical to those of the **LEVEL SHOWER TRAY**, except for the smaller dimensions and for being framed in a shower with slopes. Ideal for those who prefer a singular aesthetic and a contact with the floor without contrasts.




INSTALLATION VIDEO

SUMI LEVEL

PATENT NUMBER: ES 2585849

LEVEL drain.

Consult the technical data on the page: 96.

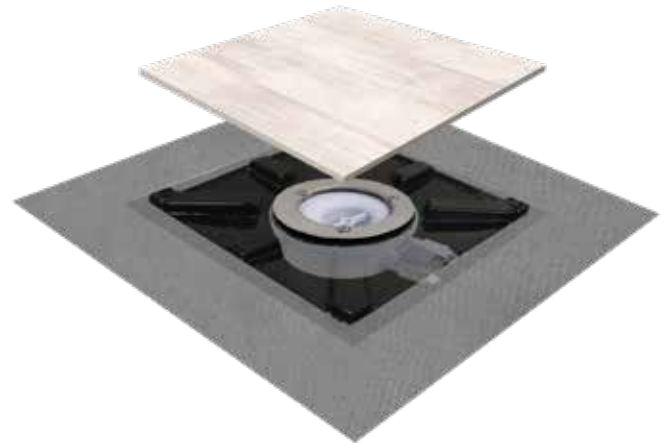

_construction height: 86 mm

_outlet: horizontal Ø40 mm

_evacuation: 0,5 litres/second S/UNE-EN 274

_composition: high performance polyurethane


advantages

- Maximum cleanliness: with antibacterial and fungicidal treatment.
- No design limits. Suitable for large tile formats.
- Completely invisible drain.
- Easy installation. Easily levelled without the need for special anchors.
- Fully waterproofed supports. It contains a heat-sealed eave at the base of the linear to ensure the joint between supports.




INSTALLATION VIDEO

Top view SUMI LEVEL base

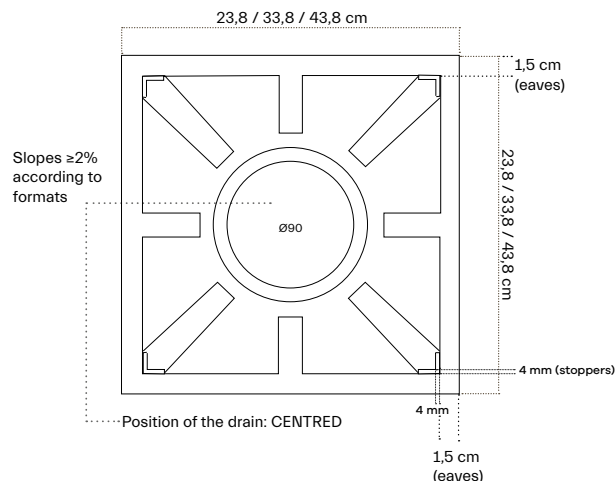

bottom view

It has dovetail grooves to improve C2 S1/S2 tile adhesive anchoring.

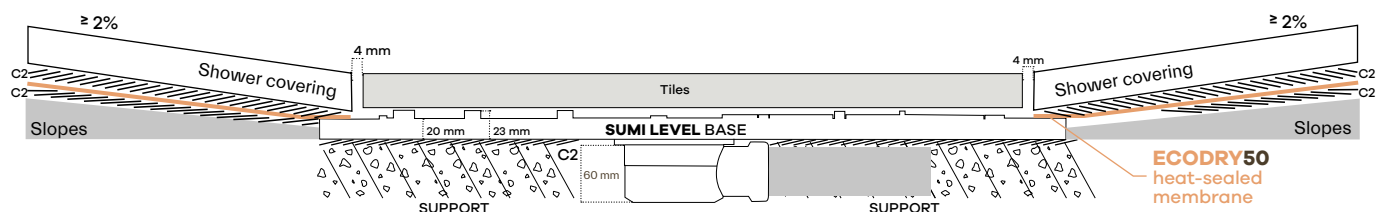




reference	product	size	piece space
544015361	SUMI LEVEL 20	23,8 x 23,8 cm	20 x 20 cm
544015606	SUMI LEVEL 30	33,8 x 33,8 cm	30 x 30 cm
544015903	SUMI LEVEL 40	43,8 x 43,8 cm	40 x 40 cm

Includes:

1. **SUMI LEVEL** base with **ECODRY50** heat-sealed membrane
2. LEVEL drain
3. 1,5 x 1,5 m **ECODRY50** membrane
4. Cleaning key
5. **REVESTTECHFLEX** adhesive




customized manufacturing on request

Consult with our commercial department.



INSTALLATION

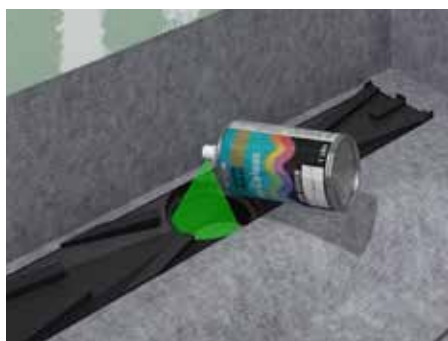

1. Lay out the **LINEAR/SUMI LEVEL** and mark the exact position of the drain.



2. Measure to determine the installation height of the **LINEAR/SUMI LEVEL** base always from the base of the drain.



3. Connect the drain, the pipe must have a $\geq 2\%$ slope. Check the correct evacuation. Fill the surface with mortar base, taking into account the levels taken and leaving sufficient clearance to fit the drain.




4. Create a strip of **REVESTTECH FLEX** adhesive on the inside of the lip-type joint.



5. Seal to the outlet of the Level base by pressing to distribute the adhesive. Ensure that the thickest part of the joint is downwards. Do not wait for it to dry for the next step.



6. Create a strip of **REVESTTECH FLEX** along the perimeter of the top of the base.

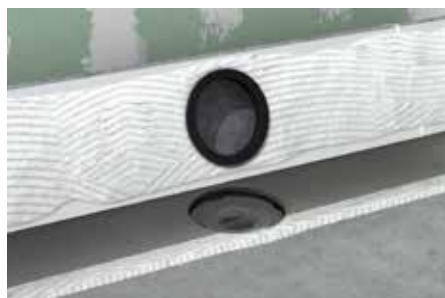

7. Once the mortar is set, apply C2 S1/S2 adhesive on the structure and on the rear face of the **LINEAR/SUMI LEVEL** base.



8. Place the metal ring, insert the screws and screw until completely sealing the ring at the outlet of the tray. Check that the **LINEAR/SUMI LEVEL** is levelled. Collect the membrane before forming the slopes.




9. Make the slopes. The flat part of the **LINEAR/SUMI LEVEL** eaves determines their starting point.



10. Once the mortar is set, check again that all levels are correct.



11. Adhere the **ECODRY BAND** heat-sealed to the **LINEAR / SUMI LEVEL** with C2 S1/S2 adhesive on meeting points and slopes.

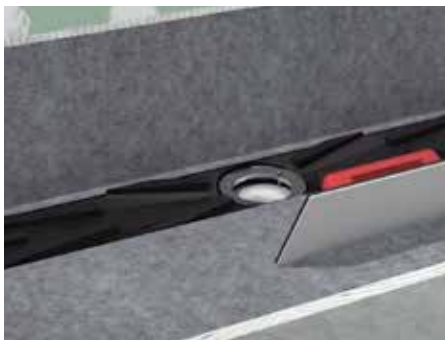

12. Check that the membrane is extended and use a trowel to remove the air that may have been generated.



13. Form the corners by folding the membrane. Apply **REVESTTECHFLEX** to adhere the membrane.



14. Apply a strip of **REVESTTECHFLEX** adhesive before overlapping the membrane of the rest of the shower.



15. Check that the membrane is extended and use a trowel to remove the air that may have been generated.



16. Cover the shower floor with C2 S1/S2 adhesive and adhere the **ECODRY50** membrane included in the kit.



17. For integral waterproofing, we recommend covering the walls with **ECODRY50** membrane (not included in the kit).



18. Place the tiles over the **LINEAR/SUMI LEVEL**.



19. Proceed to cover the tray with tiles, starting from the eaves and always using the **LINEAR/SUMI LEVEL** as a guide.

**LINEAR LEVEL AND SUMI LEVEL
INSTALLATION VIDEO**





SECRET WALL LEVEL shower

Hidden wall drain

SECRET WALL LEVEL is more than just a drainage and waterproofing kit: it is the perfect fusion of technology, design, and functionality.

Conceived to integrate invisibly at skirting level, it ensures flawless water drainage while maintaining the uninterrupted visual continuity of the ceramic finish. No cuts. No interruptions. Just a perfect surface.

It collects water from three slopes and discreetly channels it through the joint between the floor and the wall, preserving the clean and sophisticated aesthetic your project deserves.

Made from high-performance polyurethane, it is designed for plasterboard (drywall) walls with a rectangular base. It incorporates a siphonic drain—convertible into a non-siphonic one—with a 40 mm horizontal outlet, and includes the **ECODRY50** membrane for absolute waterproofing from day one.



SECRET WALL LEVEL






- _ shower drain: rectangular with removable siphon.
- _ water reception area: 31 mm x 298 mm.
- _ outlet with connecting nut: horizontal Ø40 mm.
- _ evacuation: 0,55 litres/second S/UNE-EN 274.

advantages

- Invisible.
- 100% watertight.
- Integrated waterproofing.
- Acoustic insulation.
- Surface with antibacterial and fungicide sanitary treatment.
- Perfect installation in plasterboard walls.

WALL DRAIN FOR DRYWALL SYSTEMS

Available in
40 cm y 60 cm.

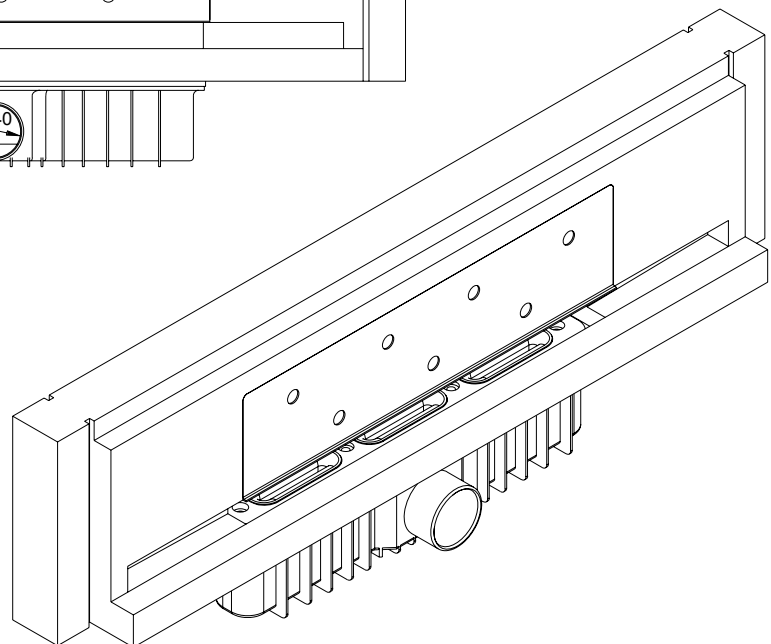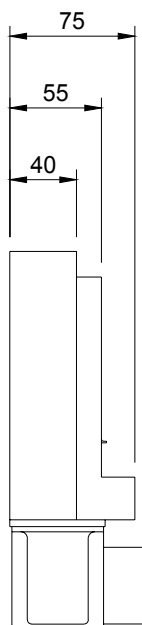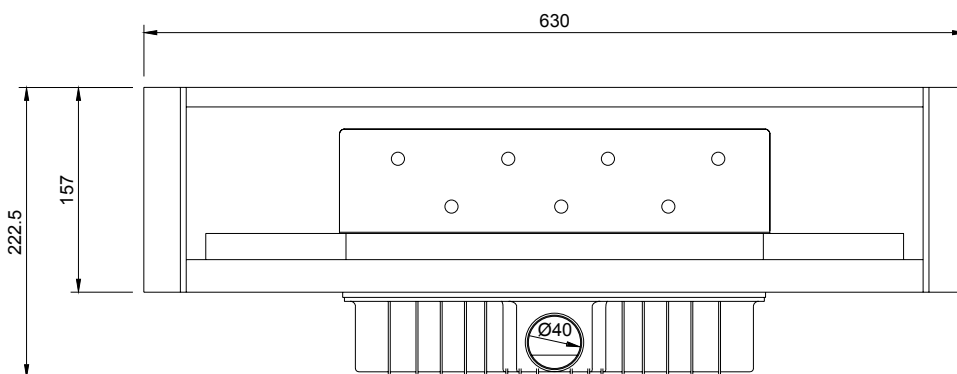



		size	piece space
596354074	SECRET WALL LEVEL 40	43 x 22,5 cm	33 x 7,9 cm
596354067	SECRET WALL LEVEL 60	63 x 22,5 cm	33 x 7,9 cm

CONCEALED SHOWER DRAIN FOR PLASTERBOARD WALLS

INCLUDES:

Drain **SECRET WALL LEVEL** with **ECODRY50** waterproofing membrane adhered around its perimeter, ceramic tileable stainless steel lid, hooks to lift the ceramic piece. Available in two sizes: 40 cm and 60 cm.





DRY50 LINEAR TILEABLE shower grate

“Hidden” grate

The grate covered with the same tiles as the rest of the bathroom, drains the water through the discretely visible lateral grooves. A designer, smooth space. It integrates all the elements, always looking for minimalist surfaces, avant-garde lines and above all the personal pleasure of having a shower that you love.



INSTALLATION VIDEO


DRY50 LINEAR TILEABLE

Two types of drains to choose from:
PREMIER or **FLAT**.

Consult technical information on page: 98 and 99.






INSTALLATION VIDEO

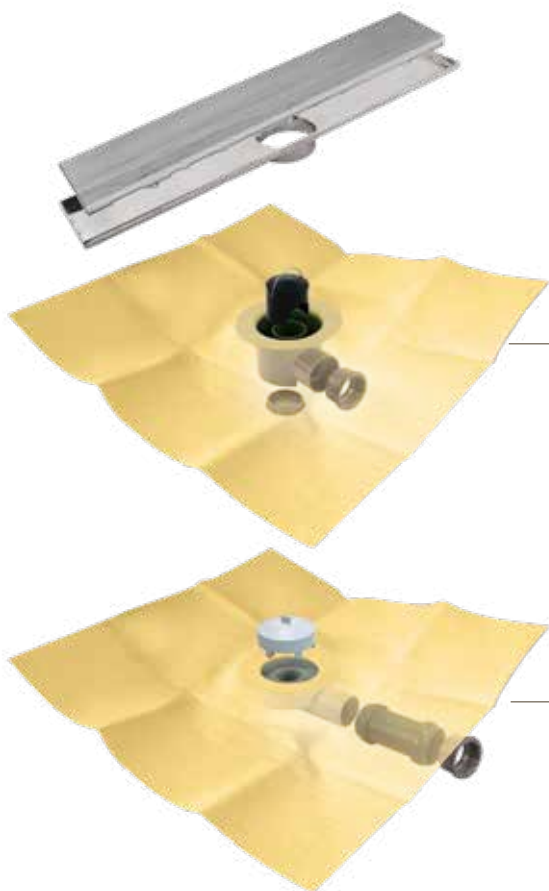

DRY50 LINEAR PREMIER TILEABLE

DRY50 LINEAR FLAT TILEABLE

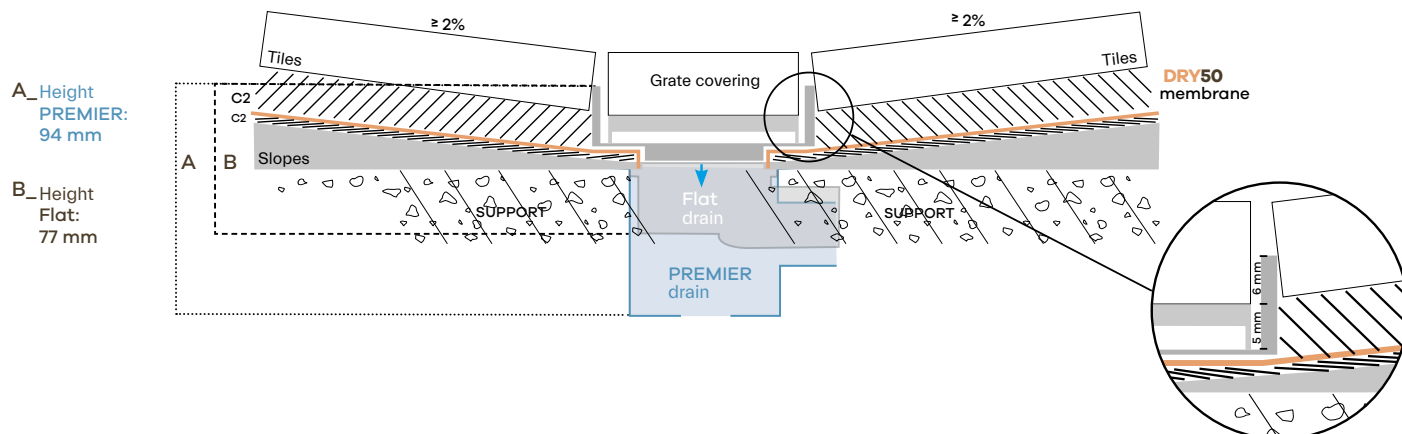

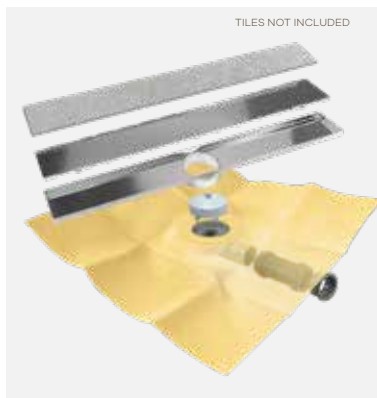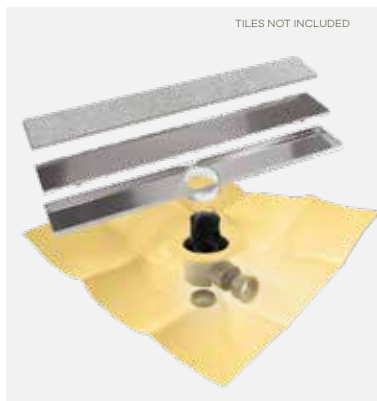

reference	product	grate	membrane	
544012209	• DRY50 LINEAR PREMIER 60 tileable	60 cm	1,2 x 2 m	
544012100	• DRY50 LINEAR PREMIER 70 tileable	70 cm	1,5 x 2 m	
544012186	• DRY50 LINEAR PREMIER 80 tileable	80 cm	1,5 x 2 m	
544012254	• DRY50 LINEAR PREMIER 90 tileable	90 cm	1,5 x 2 m	
544011950	• DRY50 LINEAR PREMIER 100 tileable	100 cm	1,5 x 2 m	
544012612	• DRY50 LINEAR PREMIER 120 tileable	120 cm	1,5 x 2 m	

Drainage kit with linear grate prepared to be covered with tiles and **DRY50** waterproofing membrane heat-sealed to the PREMIER drain.

Outlets:
Horizontal and vertical (40/50H_54 litre/minute).

Height:
82 mm.

reference	product	grate	membrane	
544012124	• DRY50 LINEAR FLAT 60 tileable	60 cm	1,2 x 2 m	
544011967	• DRY50 LINEAR FLAT 70 tileable	70 cm	1,5 x 2 m	
544012193	• DRY50 LINEAR FLAT 80 tileable	80 cm	1,5 x 2 m	
544012216	• DRY50 LINEAR FLAT 90 tileable	90 cm	1,5 x 2 m	
544012544	• DRY50 LINEAR FLAT 100 tileable	100 cm	1,5 x 2 m	
544012551	• DRY50 LINEAR FLAT 120 tileable	120 cm	1,5 x 2 m	

Drainage kit with linear grate prepared to be covered with tiles and **DRY50** waterproofing membrane heat-sealed to the FLAT drain.


Outlets:
Horizontal and vertical (40/50H_30 litre/minute).

Height:
65 mm.


Contains: self-adhesive geotextile to place on the top of the grate, for a better grip of the covering.




R_grate	C_drainage
Length of the grate R	Length of the drainage C
60	591 mm
70	695 mm
80	795 mm
90	895 mm
100	995 mm
120	1195 mm

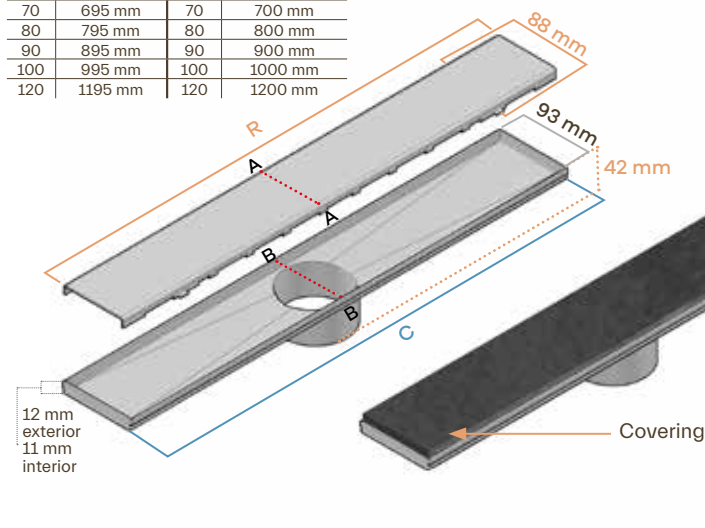

A/A tileable grate

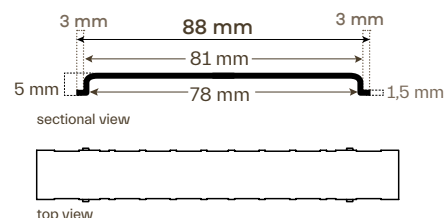


B/B_drainage base

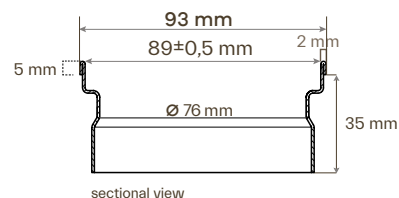

position of the drain in the **DRY50** membrane

Off center vertical version


The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its longest part and centred on its narrowest part.



*

Off center horizontal version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its narrowest part and centred on its longest part.




POSITIONING OF THE CUSTOM-MADE DRAIN: With a minimum order of 50 units, we seal the drain at the exact point of the membrane requested by the customer.



DRY50 LINEAR MC shower grate

microcement grates

The grate covered with the same microcement that the rest of the bathroom, drains the water by the discretely visible lateral grooves. A design characteristic of the most creative architecture, that looks for a smooth, solid and elegant surface.

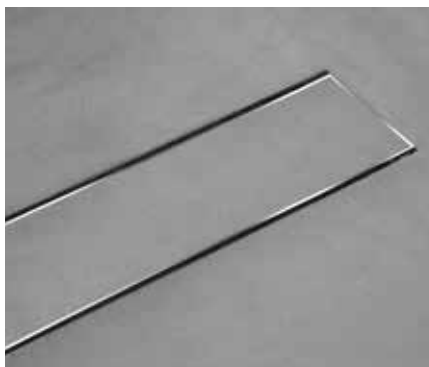


DRY50 LINEAR MC


FLAT drain.

Consult the technical data on the page: 99.




DRY50 LINEAR FLAT MC

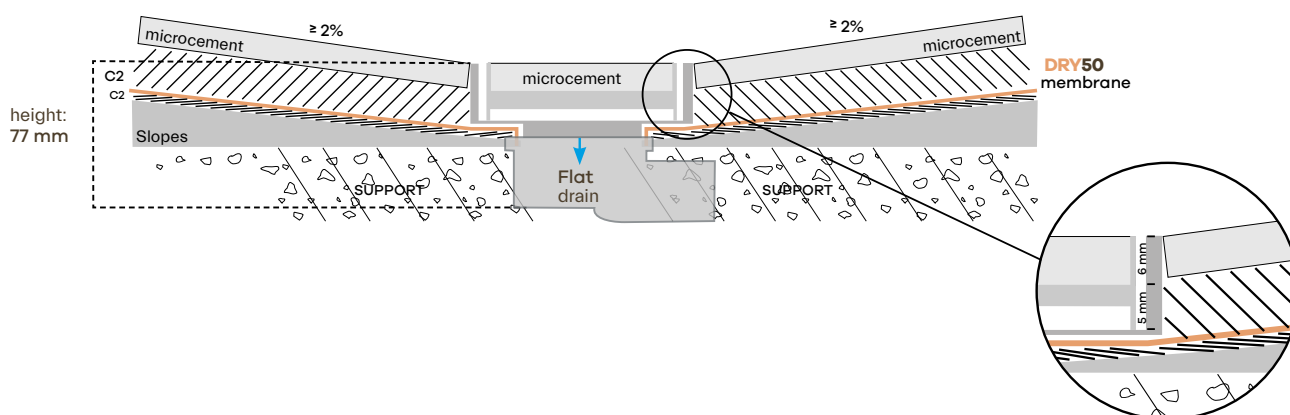

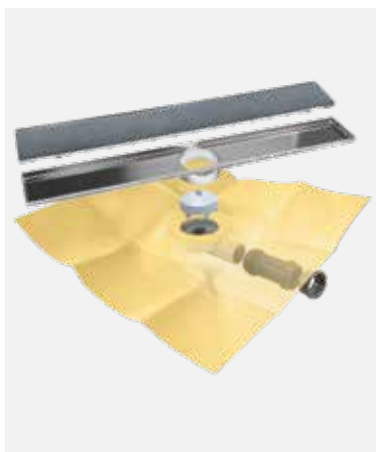


reference	product	grate	membrane	
544015767	• DRY50 LINEAR FLAT 60 mc	60 cm	1,2 x 2 m	
544015934	• DRY50 LINEAR FLAT 70 mc	70 cm	1,5 x 2 m	Drainage kit with linear grate prepared to be filled with microcement and with DRY50 waterproofing membrane heat-sealed to the FLAT drain.
544016252	• DRY50 LINEAR FLAT 80 mc	80 cm	1,5 x 2 m	
544016382	• DRY50 LINEAR FLAT 90 mc	90 cm	1,5 x 2 m	
544016399	• DRY50 LINEAR FLAT 100 mc	100 cm	1,5 x 2 m	Outlets: Horizontal and vertical (40/50H_30 litre/minute).
544016269	• DRY50 LINEAR FLAT 120 mc	120 cm	1,5 x 2 m	Height: 65 mm.

Contains: self-adhesive geotextile to place on the top of the grate, for a better grip of the covering.

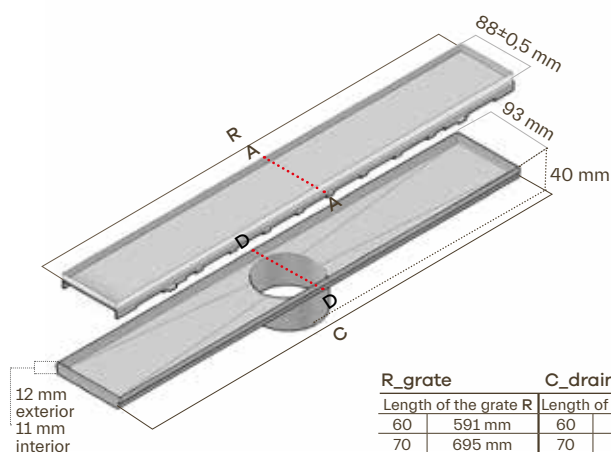


R_grate		C_drainage	
Length of the grate R		Length of the drainage C	
60	591 mm	60	596 mm
70	695 mm	70	700 mm
80	795 mm	80	800 mm
90	895 mm	90	900 mm
100	995 mm	100	1000 mm
120	1195 mm	120	1200 mm

A/A_ mc grid refillable with microcement

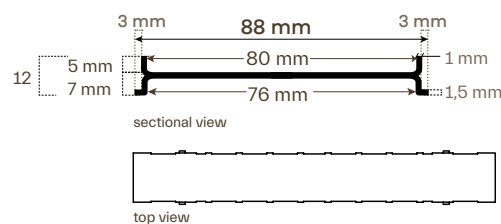


D/D_drainage base

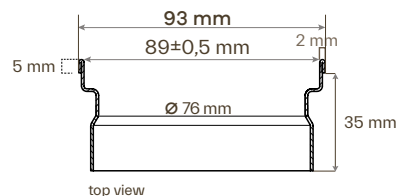

Position of the drain in the **DRY50** membrane


• Off center vertical version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its longest part and centred on its narrowest part.



* Off center horizontal version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its narrowest part and centred on its longest part.




POSITIONING OF THE CUSTOM-MADE DRAIN: with a minimum order of 50 units, we seal the drain at the exact point of the membrane requested by the customer.



DRY50 LINEAR shower grate

one slope

The drainage at one end of the shower receives water through a single slope. Showers with linear drainage provide an aesthetic of simple and modern lines. An integrated shower, comfortable and functional made with high quality materials.

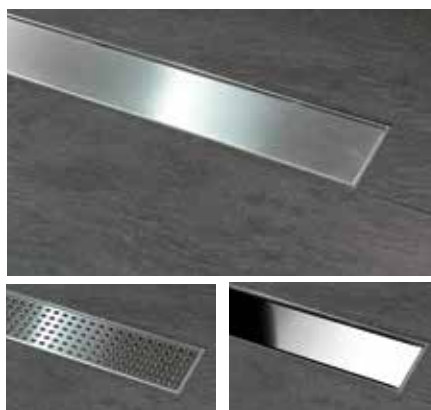

INSTALLATION VIDEO


DRY50 LINEAR

Two types of drain to choose from:
PREMIER or **FLAT**.

Consult technical information on page: 98 and 99.



INSTALLATION VIDEO

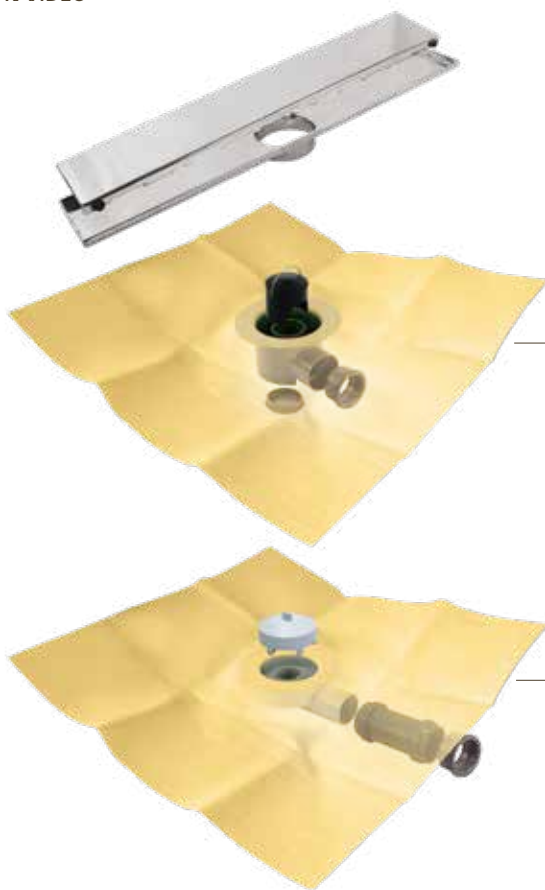


DRY50 LINEAR PREMIER


DRY50 LINEAR FLAT



CUSTOM-MADE LASER OPTION

Linear grates of STEEL and CHROME design can be engraved by laser technique, with the company logo. Consult conditions to the Commercial Department.

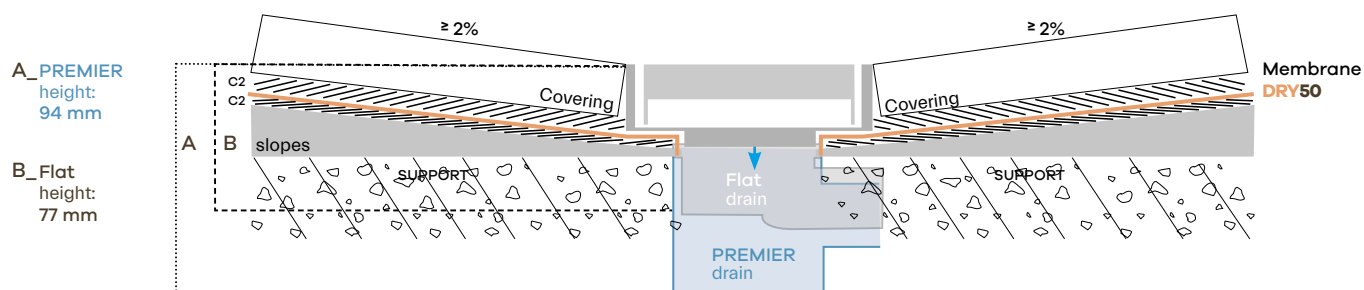

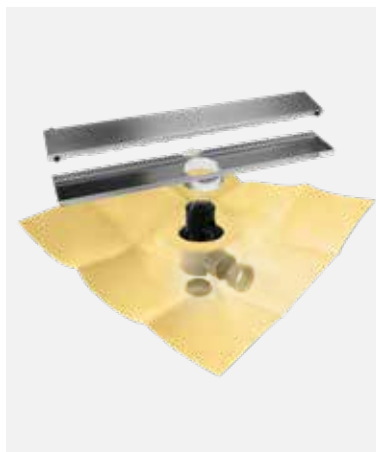


reference	product	grate	membrane
544010908	•DRY50 LINEAR PREMIER 60 steel	60 cm	1,2 x 2 m
544011011	•DRY50 LINEAR PREMIER 60 chrome		
544010823	•DRY50 LINEAR PREMIER 60 squares		
544010915	•DRY50 LINEAR PREMIER 70 steel	70 cm	1,5 x 2 m
544010960	•DRY50 LINEAR PREMIER 70 chrome		
544010830	•DRY50 LINEAR PREMIER 70 squares		
544010922	•DRY50 LINEAR PREMIER 80 steel	80 cm	1,5 x 2 m
544010977	•DRY50 LINEAR PREMIER 80 chrome		
544010847	•DRY50 LINEAR PREMIER 80 squares		
544010939	•DRY50 LINEAR PREMIER 90 steel	90 cm	1,5 x 2 m
544010984	•DRY50 LINEAR PREMIER 90 chrome		
544010854	•DRY50 LINEAR PREMIER 90 squares		
544010946	*DRY50 LINEAR PREMIER 100 steel	100 cm	1,5 x 2 m
544010991	*DRY50 LINEAR PREMIER 100 chrome		
544010861	*DRY50 LINEAR PREMIER 100 squares		
544010953	*DRY50 LINEAR PREMIER 120 steel	120 cm	1,5 x 2 m
544011998	*DRY50 LINEAR PREMIER 120 chrome		
544011004	*DRY50 LINEAR PREMIER 120 squares		

Drainage kit with linear grate prepared to be covered with tiles and **DRY50** waterproofing membrane heat-sealed to the PREMIER drain.

Outlets:
Horizontal and vertical
(40/50H_54 litre/minute).

Height:
82 mm.




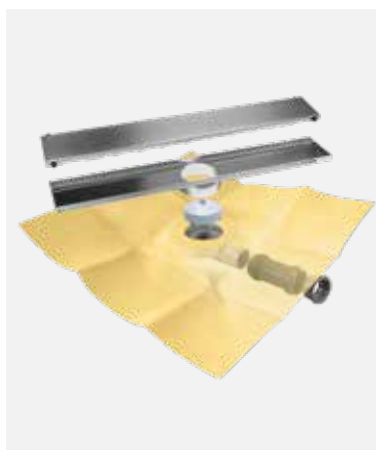


reference	product	grate	membrane
544011028	•DRY50 LINEAR FLAT 60 steel	60 cm	1,2 x 2 m
544011110	•DRY50 LINEAR FLAT 60 chrome		
544011035	•DRY50 LINEAR FLAT 60 squares		
544011066	•DRY50 LINEAR FLAT 70 steel	70 cm	1,5 x 2 m
544011165	•DRY50 LINEAR FLAT 70 chrome		
544011042	•DRY50 LINEAR FLAT 70 squares		
544011073	•DRY50 LINEAR FLAT 80 steel	80 cm	1,5 x 2 m
544011103	•DRY50 LINEAR FLAT 80 chrome		
544011059	•DRY50 LINEAR FLAT 80 squares		
544011080	•DRY50 LINEAR FLAT 90 steel	90 cm	1,5 x 2 m
544011172	•DRY50 LINEAR FLAT 90 chrome		
544011141	•DRY50 LINEAR FLAT 90 squares		
544011097	*DRY50 LINEAR FLAT 100 steel	100 cm	1,5 x 2 m
544011189	*DRY50 LINEAR FLAT 100 chrome		
544011134	*DRY50 LINEAR FLAT 100 squares		
544011127	*DRY50 LINEAR FLAT 120 steel	120 cm	1,5 x 2 m
544012513	*DRY50 LINEAR FLAT 120 chrome		
544011158	*DRY50 LINEAR FLAT 120 squares		

Drainage kit with linear grate prepared to be covered with tiles and **DRY50** waterproofing membrane heat-sealed to the FLAT drain.

Outlets:
Horizontal and vertical
(40/50H_30 litre/minute).

Height:
65 mm.

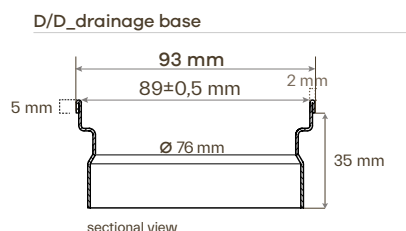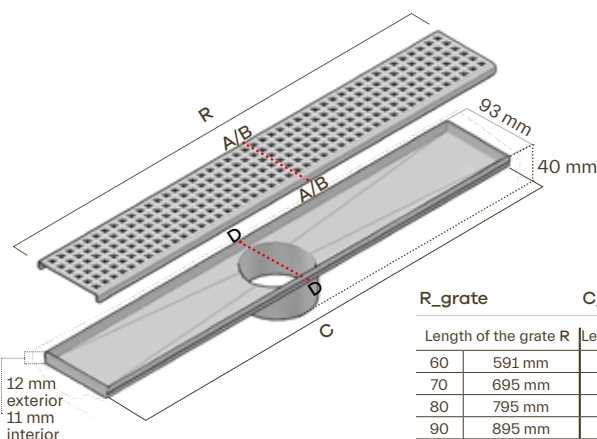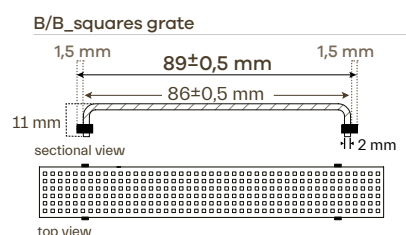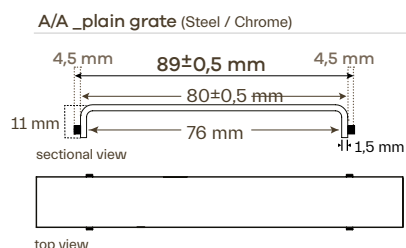


R_grate	C_drainage
Length of the grate R	Length of the drainage C
60	591 mm
70	695 mm
80	795 mm
90	895 mm
100	995 mm
120	1195 mm
60	596 mm
70	700 mm
80	800 mm
90	900 mm
100	1000 mm
120	1200 mm

Position of the drain in the **DRY50** membrane:

Off center vertical version


The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its longest part and centred on its narrowest part.



*

Off center horizontal version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its longest part and centred on its narrowest part.



POSITIONING OF THE CUSTOM-MADE DRAIN: With a minimum order of 50 units, we seal the drain at the exact point of the membrane requested by the customer.



DRY50 SUMI LUXE shower grate

four slopes

The centred drain receives the water through the four slopes. For those who prefer the traditional drain. A singular point drain with four slopes, which allows you to keep that classic but renovated air in your shower.



INSTALLATION VIDEO

revestech®

DRY50 SUMI LUXE

Two types of drain to choose from:
PREMIER or **FLAT**.

Consult technical information on page: 98 and 99.



INSTALLATION VIDEO




DRY50 SUMI LUXE




DRY50 SUMI FLAT LUXE


A_ **PREMIER**
height:
87,6 mm

B_ **Flat**
height:
70,6 mm

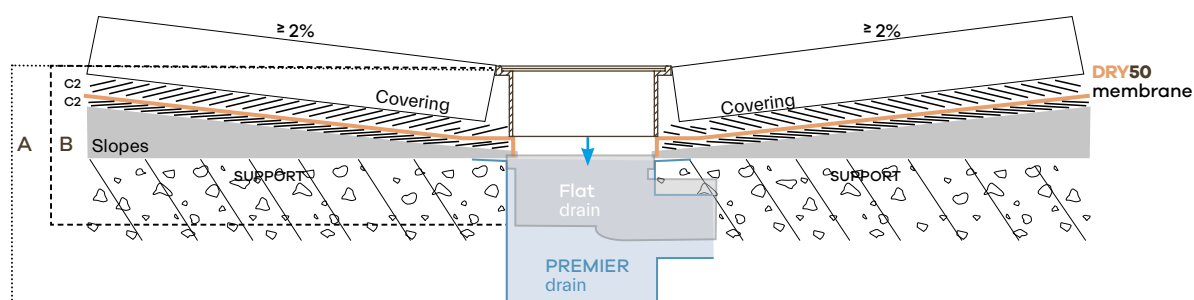


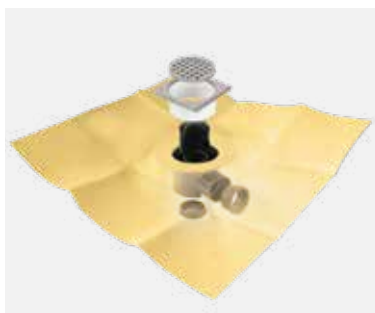

reference	product	membrane	
544010380	● DRY50 SUMI LUXE 025	0,5 x 0,5 m	PREMIER siphonic drain kit with 10,7 cm x 10,7 cm grate to interlock and DRY50 waterproofing membrane sealed to it to guarantee the most critical point.
544010397	● DRY50 SUMI LUXE 144	1,2 x 1,2 m	
544010403	● DRY50 SUMI LUXE 225	1,5 x 1,5 m	
544010304	▲ DRY50 SUMI LUXE 240	1,2 x 2 m	
544011516	● DRY50 SUMI LUXE 240D	1,2 x 2 m	
544010410	▲ DRY50 SUMI LUXE 300	1,5 x 2 m	Outlets: Horizontal and vertical (40/50H_54 litre/minute).
544011547	● DRY50 SUMI LUXE 300D	1,5 x 2 m	
544010427	▲ DRY50 SUMI LUXE 375	1,5 x 2,5 m	Height: 82 mm.
544011554	● DRY50 SUMI LUXE 375D	1,5 x 2,5 m	

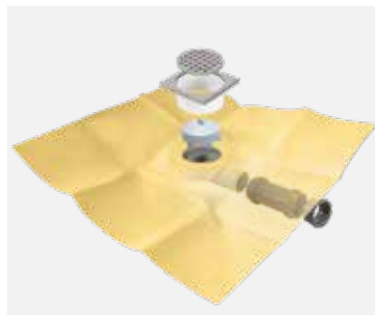


reference	product	membrane	
544010373	● DRY50 SUMI FLAT LUXE 025	0,5 x 0,5 m	FLAT siphonic drain kit with 10,7 cm x 10,7 cm grate to interlock and DRY50 waterproofing membrane sealed to it to guarantee the most critical point.
544010328	● DRY50 SUMI FLAT LUXE 144	1,2 x 1,2 m	
544010335	● DRY50 SUMI FLAT LUXE 225	1,5 x 1,5 m	
544010342	▲ DRY50 SUMI FLAT LUXE 240	1,2 x 2 m	
544011424	● DRY50 SUMI FLAT LUXE 240D	1,2 x 2 m	
544010359	▲ DRY50 SUMI FLAT LUXE 300	1,5 x 2 m	Outlets: Horizontal and vertical (40/50H_30 litre/minute).
544011561	● DRY50 SUMI FLAT LUXE 300D	1,5 x 2 m	
544010366	▲ DRY50 SUMI FLAT LUXE 375	1,5 x 2,5 m	Height: 65 mm.
544011578	● DRY50 SUMI FLAT LUXE 375D	1,5 x 2,5 m	

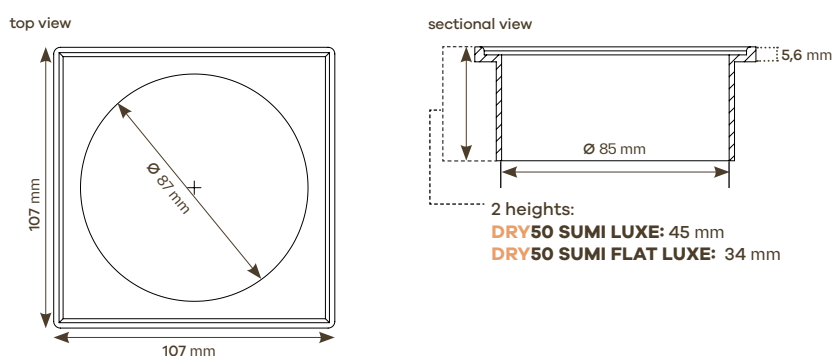

position of the drain in the **DRY50** membrane


* Off center horizontal version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its narrowest part and centred on its longest part.




● Centred square version

The siphonic drain is sealed in the centre of the waterproof membran.



▲ Centred rectangular version

The siphonic drain is sealed in the centre of the waterproof membrane.





DRY50 LINEAR SLIM shower grate

thinner grates


Continuing with the aesthetics of a single slope, the linear slim grates, are thinner. Their discrete presence turns them into an elegant resource, which gives a special touch to the overall design of the shower.



DRY50 LINEAR SLIM TILEABLE

NOVO drain



Consult more technical data on page: 97.

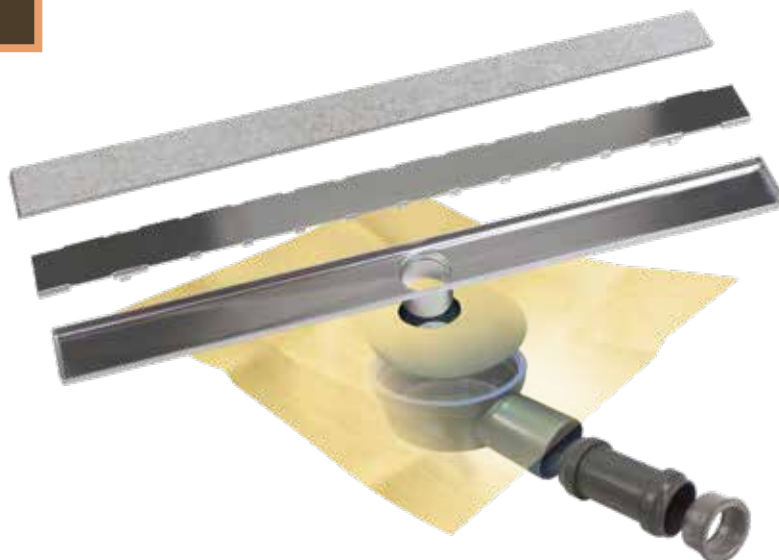


NOVO drain


Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 1.5 x 2m **DRY50** waterproof membrane EVAC type heat-sealed to the cover.

- _ Height: 60 mm.
- _ Flow rate : 0,6 l/s.
- _ Material: grey ABS.

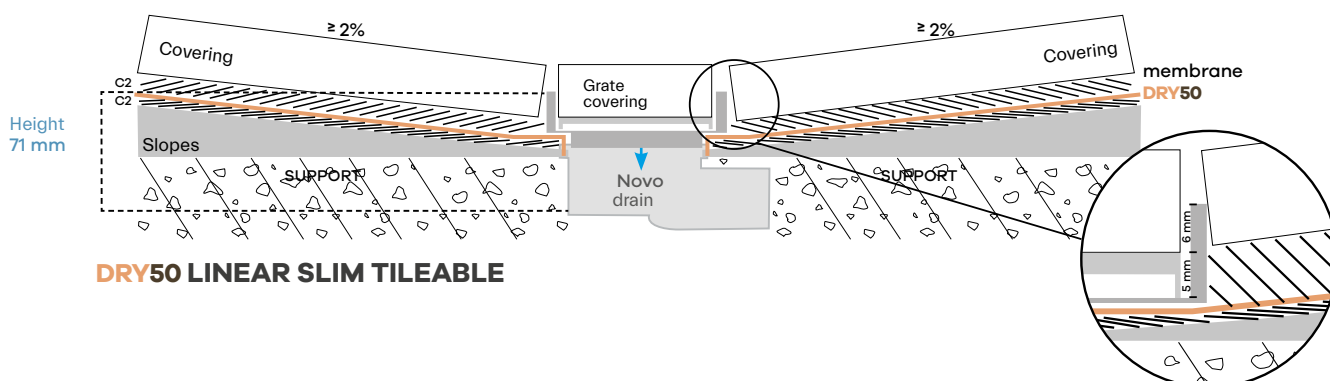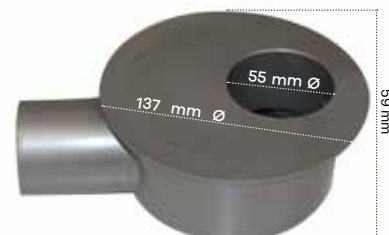




referencia	product	grate	membrane	
544012957	• DRY50 LINEAR SLIM 60 tileable	60 cm	1,5 x 2 m	Drainage kit with linear grate prepared to be covered with tiles and DRY50 waterproofing membrane heat-sealed to the NOVO drain.
544012995	• DRY50 LINEAR SLIM 70 tileable	70 cm	1,5 x 2 m	Outlets: Horizontal and vertical (40/50H_36 litre/minute).
544013039	• DRY50 LINEAR SLIM 90 tileable	90 cm	1,5 x 2 m	Height: 60 mm.

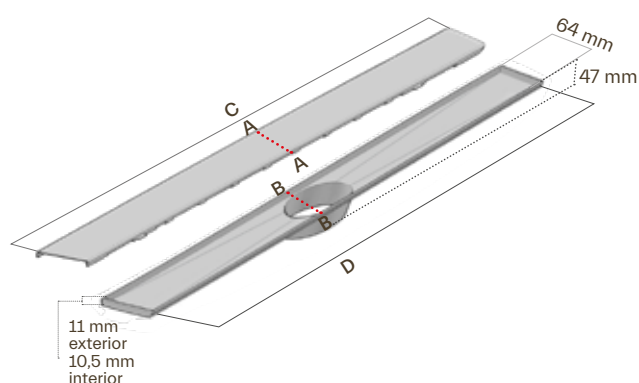


C_grate	D_drainage
Length of the grate	Length of the drainage
60	595 mm
70	695 mm
90	895 mm

A/A_tileable grate

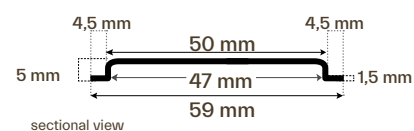


B/B_drainage base

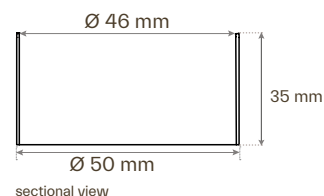

position of the drain in the **DRY50** membrane:

Off center vertical version

The siphonic drain is sealed to the waterproof membrane **decentralized 40 cm** from its longest part and centred on its narrowest part.




POSITIONING OF THE CUSTOM-MADE DRAIN: with a minimum order of 50 units, we seal the drain at the exact point of the membrane requested by the customer.

DRY50 LINEAR SLIM




NOVO drain

Consult more technical data on page: 97.



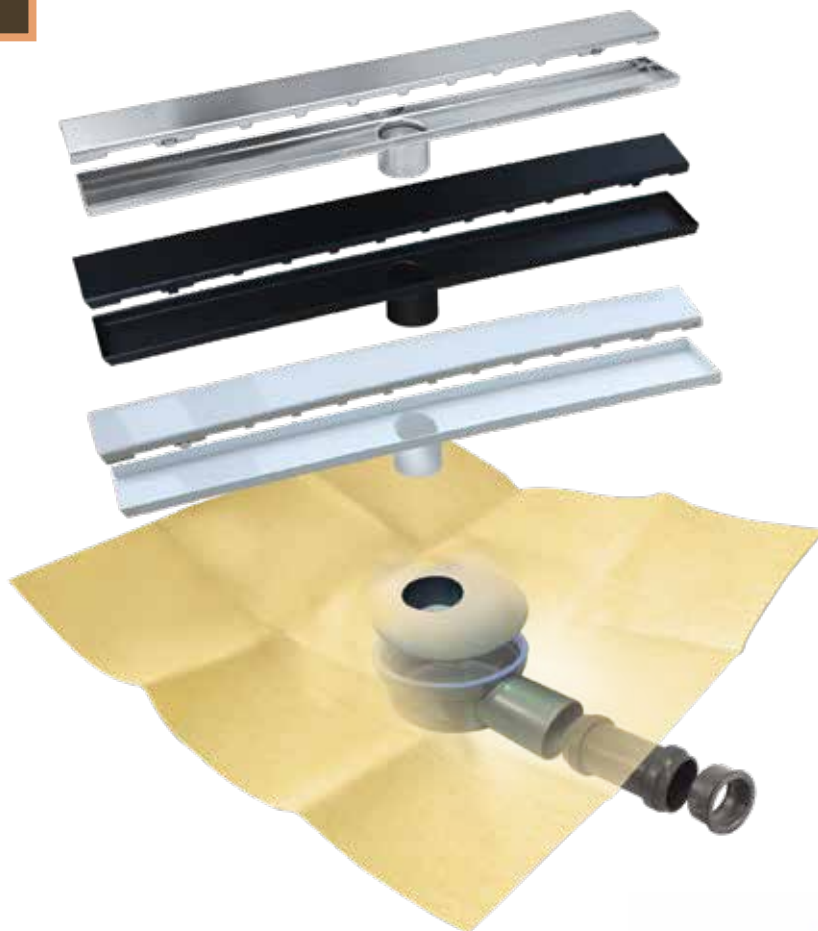


Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 1.5 x 2 m **DRY50** waterproof membrane EVAC type heat-sealed to the cover.

- _ Height: 60 mm.
- _ Flow rate: 0,6 l/s.
- _ Material: grey ABS.

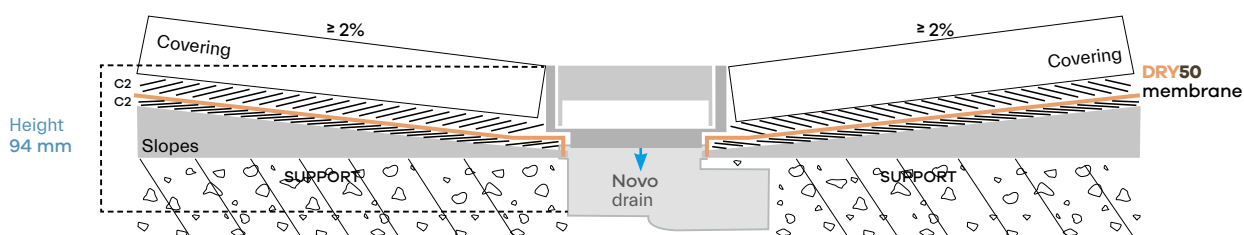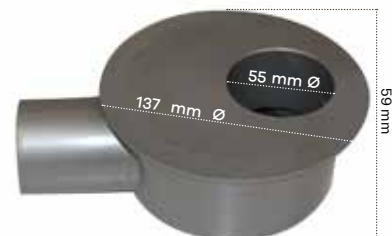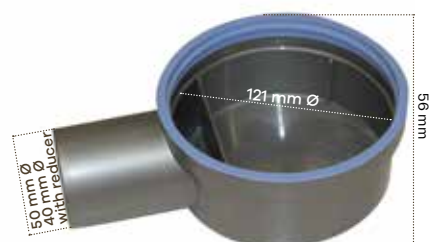

DRY50 LINEAR SLIM / DRY50 LINEAR SLIM BLACK / DRY50 LINEAR SLIM WHITE

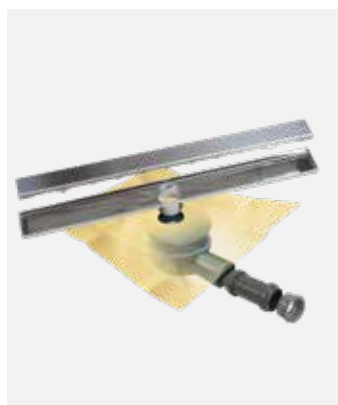

reference	product	grate	membrane
544012933	•DRY50 LINEAR SLIM 60 steel	60 cm	1,5 x 2 m
544012926	•DRY50 LINEAR SLIM 60 squares		
544012971	•DRY50 LINEAR SLIM 70 steel	70 cm	1,5 x 2 m
544012964	•DRY50 LINEAR SLIM 70 squares		
544013015	•DRY50 LINEAR SLIM 90 steel	90 cm	1,5 x 2 m
544013008	•DRY50 LINEAR SLIM 90 squares		
544016344	•DRY50 LINEAR SLIM 60 black	60 cm	1,5 x 2 m
544016351	•DRY50 LINEAR SLIM 70 black	70 cm	1,5 x 2 m
544016368	•DRY50 LINEAR SLIM 90 black	90 cm	1,5 x 2 m
544016313	•DRY50 LINEAR SLIM 60 white	60 cm	1,5 x 2 m
544016337	•DRY50 LINEAR SLIM 70 white	70 cm	1,5 x 2 m
544016320	•DRY50 LINEAR SLIM 90 white	90 cm	1,5 x 2 m



Steel



Squares



Black




White

Drainage kit with linear grate available in two different designs and with **DRY50** waterproofing membrane heat-sealed to the NOVO drain.


Outlets:
Horizontal and vertical
(40/50H_36 litre/minute).

Height:
60 mm.

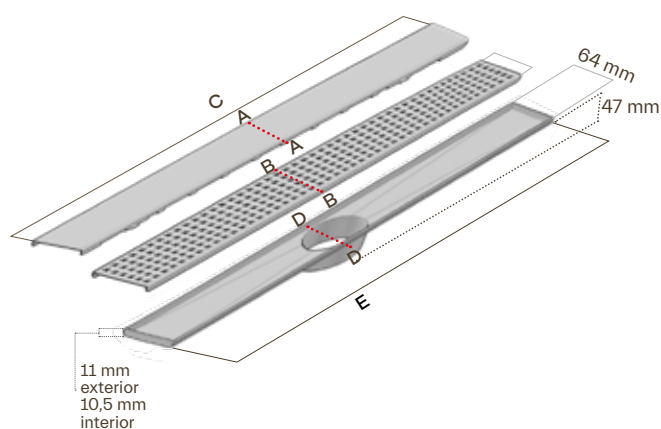


C_grate		E_drainage	
Length of the grate		Length of the drainage	
60	595 mm	60	600 mm
70	695 mm	70	700 mm
90	895 mm	90	900 mm


A/A_plain grate

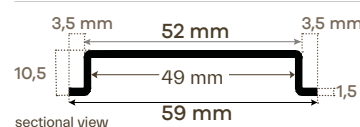

B/B_perforated grate




D/D_drainage base



Position of the drain in the **DRY50** membrane:

Off center vertical version

The siphonic drain is sealed to the waterproof membrane decentralized 40 cm from its longest part and centred on its narrowest parts.




POSITIONING OF THE CUSTOM-MADE DRAIN: with a minimum order of 50 units, we seal the drain at the exact point of the membrane requested by the customer.

BASIC LINE SHOWERS

SUMI BASIC


NOVO drain


Consult more technical data on page: 97.

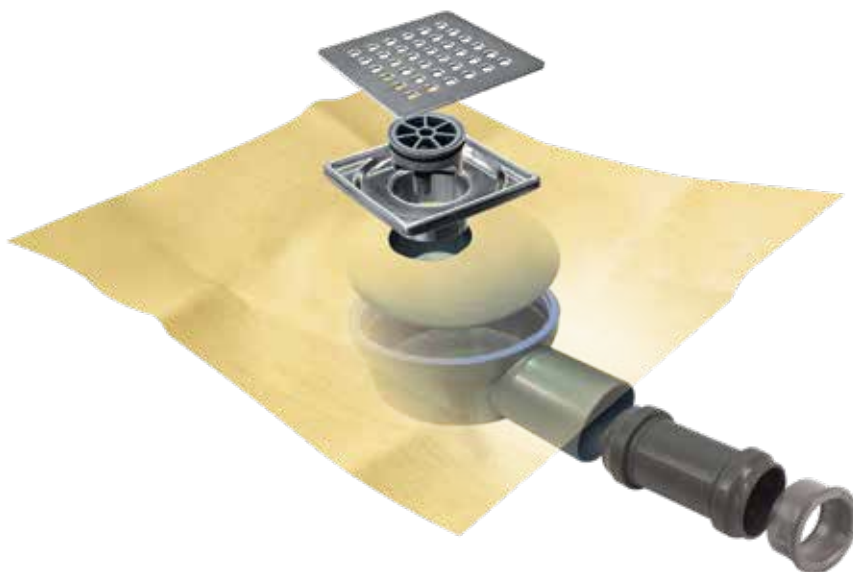

Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 25 x 25 m **DRY40** waterproof membrane EVAC type heat-sealed to the cover. Includes: 1,5 x 2 m (3m²) **DRY40** membrane.

- _ Height: 60 mm.
- _ Flow rate : 0,6 l/s.
- _ Material: grey ABS.

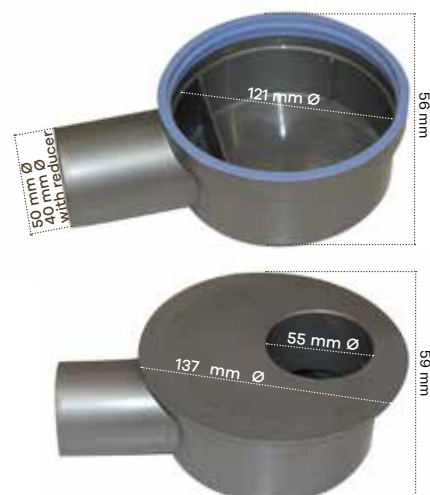


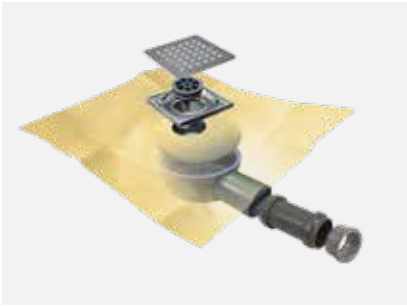


reference	product	membrane	description
544018423	SUMI BASIC	25 x 25 cm	BASIC drain kit and 10.5 x 10.5 cm square grate with perforated squares design finish, 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) DRY40 membrane. Total height (drain + grate): 60 mm.




Grate top view

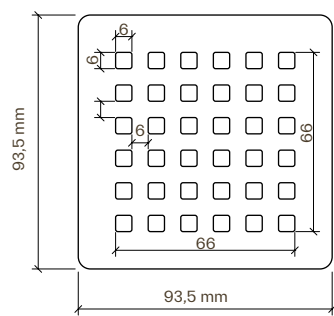


Grate sectional view



Top view lifting frame

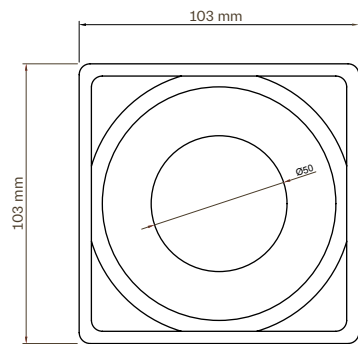

Sectional view lifting frame




BASIC LINE SHOWERS

LINEAR BASIC SQUARES



NOVO drain

Consult more technical data on page: 97.

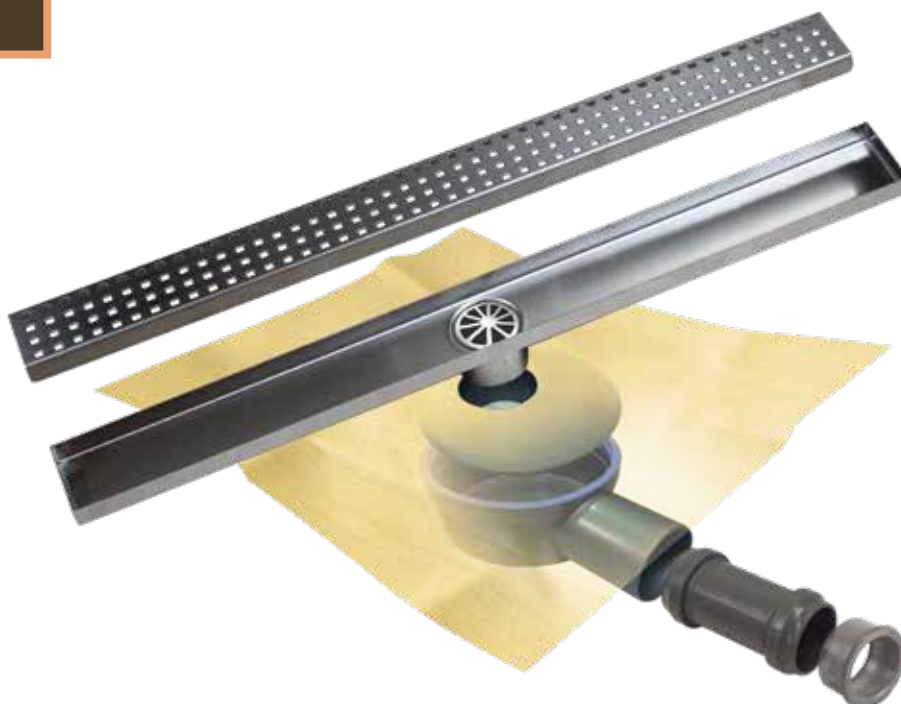



Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 25 x25 m **DRY40** waterproof membrane EVAC type heat-sealed to the cover. Includes: 1,5 x 2 m (3m²) **DRY40** membrane.

- _ Height: 60 mm.
- _ Flow rate : 0,6 l/s.
- _ Material: grey ABS.

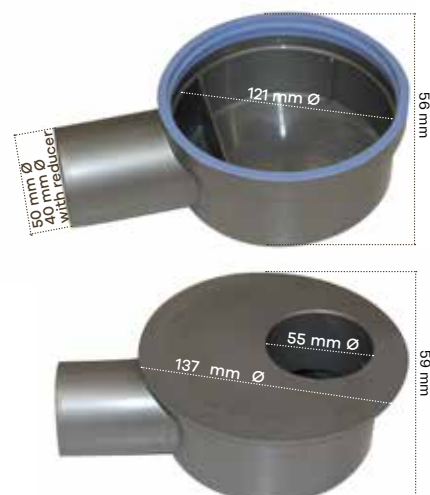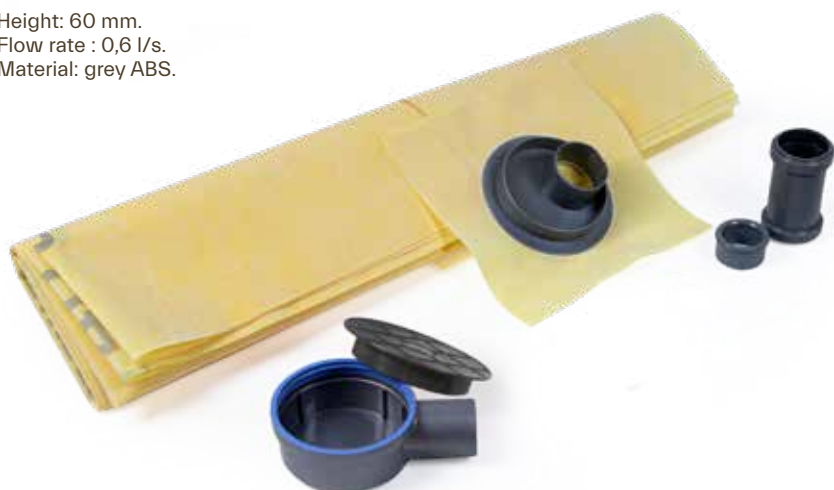



reference	product	membrane	description
544018430	LINEAR BASIC squares 50	25 x 25 cm	BASIC drain kit and 6,1 cm wide linear grate with perforated squares design finish, 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m²) DRY40 membrane. Total height (drain + grate): 77,2 mm.
544018447	LINEAR BASIC squares 60	25 x 25 cm	
544018454	LINEAR BASIC squares 70	25 x 25 cm	
544018461	LINEAR BASIC squares 80	25 x 25 cm	
544018478	LINEAR BASIC squares 90	25 x 25 cm	
544018485	LINEAR BASIC squares 100	25 x 25 cm	
544018492	LINEAR BASIC squares 120	25 x 25 cm	

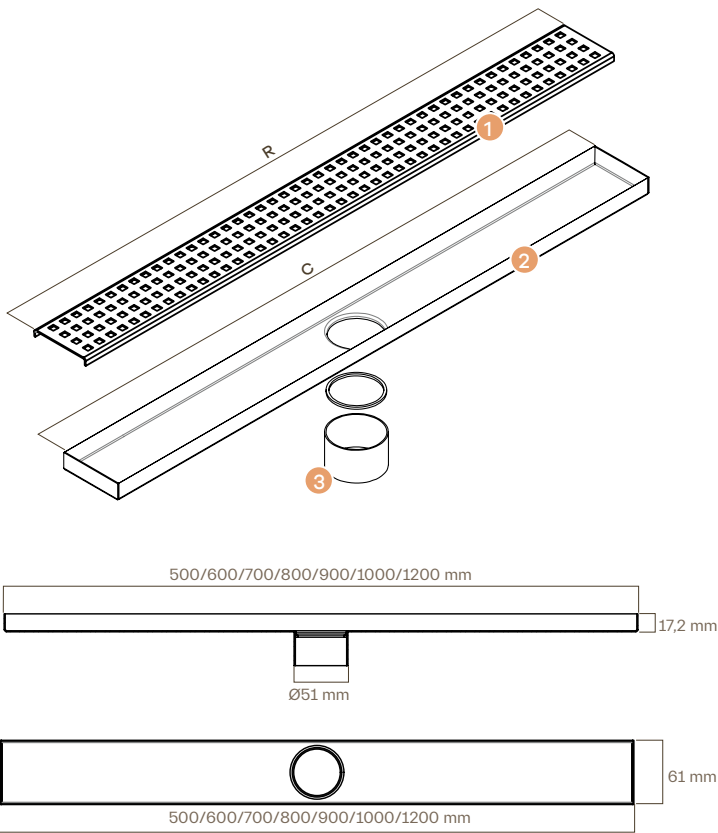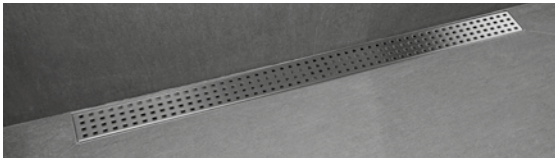


1 and 2 Linear BASIC SQUARES

Description	Length R	Length C
LINEAR BASIC SQUARES 60	598 mm	600 mm
LINEAR BASIC SQUARES 70	698 mm	700 mm
LINEAR BASIC SQUARES 80	798 mm	800 mm
LINEAR BASIC SQUARES 90	898 mm	900 mm
LINEAR BASIC SQUARES 100	998 mm	1000 mm
LINEAR BASIC SQUARES 120	1198 mm	1200 mm


3 drainage base

(Sectional view)



Square grate

(Sectional view)



BASIC LINE SHOWERS

LINEAR BASIC DUO

2 SOLUTIONS IN 1 **tileable** or **steel**




NOVO drain

Consult more technical data on page: 97.


Shower siphonic drain kit (convertible into non-siphonic) that incorporates HORIZONTAL outlet of 50 mm and reduction to 40 mm, with 25 x 25 m **DRY40** waterproof membrane EVAC type heat-sealed to the cover. Includes: 1,5 x 2 m (3m²) **DRY40** membrane.

- _ Height: 60 mm.
- _ Flow rate : 0,6 l/s.
- _ Material: grey ABS.



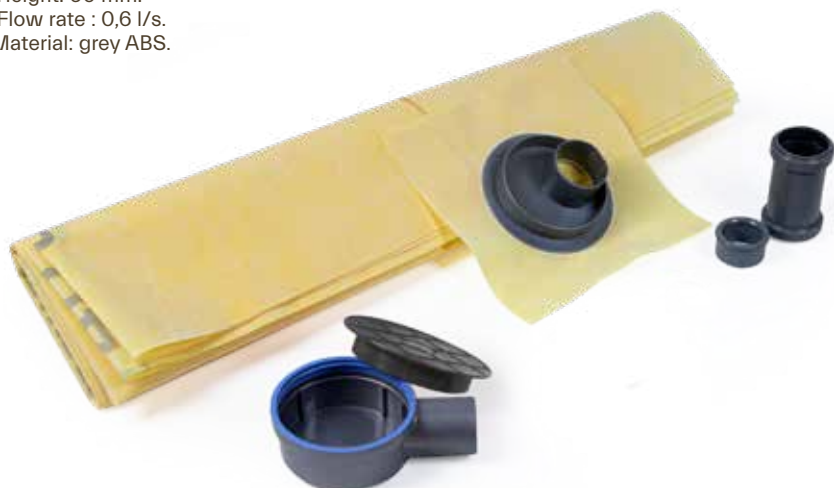


2 SOLUTIONS IN 1

tileable or steel

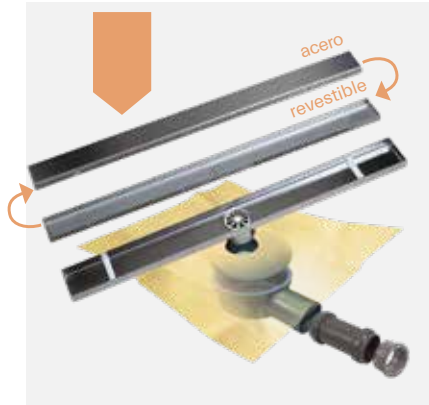

reference	product	membrane	description
544018348	LINEAR BASIC DUO 50	25 x 25 cm	BASIC drain kit and 6,1 cm wide linear grate with two different finishes tileable on one side and steel on the other, with 25 x 25 cm DRY40 waterproofing membrane heat-sealed to the cover and 1.5 x 2 m (3 m ²) DRY40 membrane. Total height (drain + grate): 77,2 mm.
544018362	LINEAR BASIC DUO 60	25 x 25 cm	
544018379	LINEAR BASIC DUO 70	25 x 25 cm	
544018386	LINEAR BASIC DUO 80	25 x 25 cm	
544018393	LINEAR BASIC DUO 90	25 x 25 cm	
544018409	LINEAR BASIC DUO 100	25 x 25 cm	
544018416	LINEAR BASIC DUO 120	25 x 25 cm	

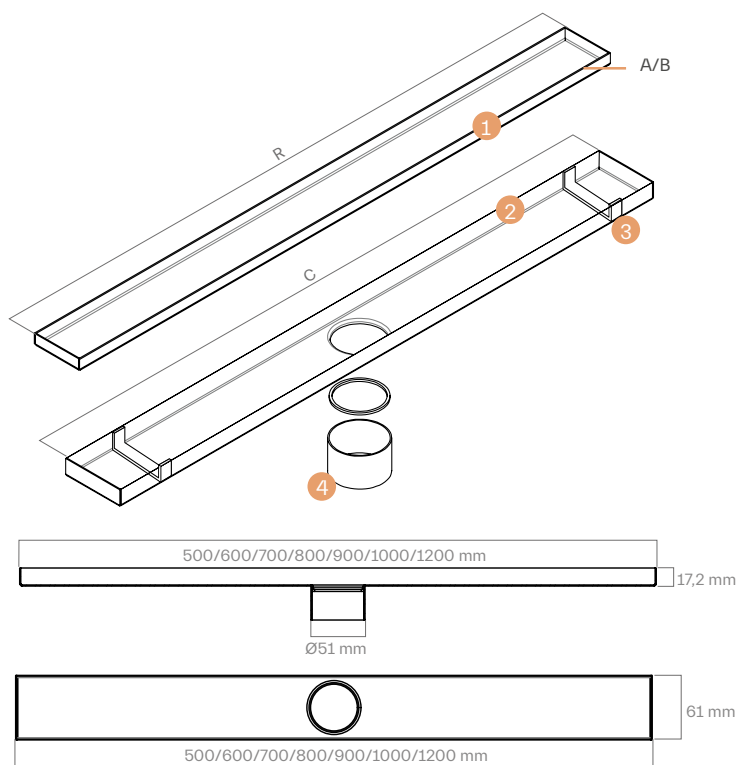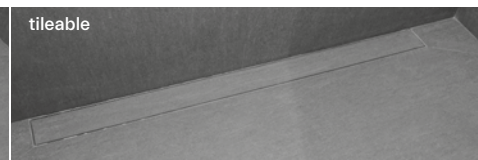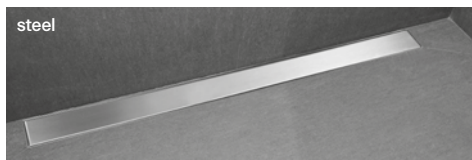


1 and 2 GRATE AND DRAINAGE LINEAR BASIC DUO


Description	Length R	Length C
LINEAR BASIC DUO 60	598 mm	600 mm
LINEAR BASIC DUO 70	698 mm	700 mm
LINEAR BASIC DUO 80	798 mm	800 mm
LINEAR BASIC DUO 90	898 mm	900 mm
LINEAR BASIC DUO 100	998 mm	1000 mm
LINEAR BASIC DUO 120	1198 mm	1200 mm

3 Plastic support for the grate

4 Drainage base

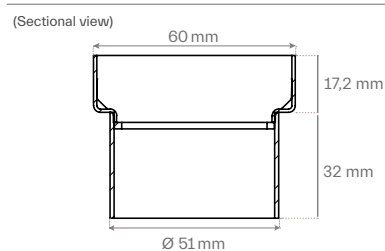

Stainless steel grate A / tileable B





STANDS & CORNER STANDS

designer shelves


Our new collection of corner and rectangular stainless steel shelves, designed to suit any bathroom style. Very trendy. Very Revestech.



STAND

Shelves in various models for installation on tiled shower walls. Made from satin-finish AISI 304 stainless steel, 1.5 mm thick. The perforated fixing wings are embedded into the tile adhesive during installation, ensuring perfect integration with the wall. A high-quality accessory installed along the joints of the wall tiling.

reference	model
596353381	CLIP STAND
596353428	MINIMAL STAND
596353404	DUNES STAND
596353442	TETRIS STAND
596353398	BAMBOO STAND

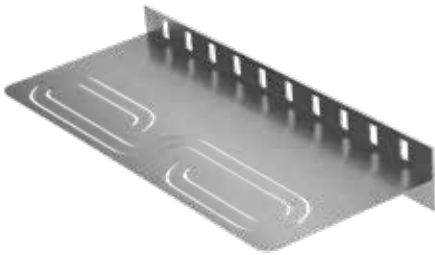

CLIP STAND



MINIMAL STAND





BAMBOO STAND



DUNES STAND



TETRIS STAND

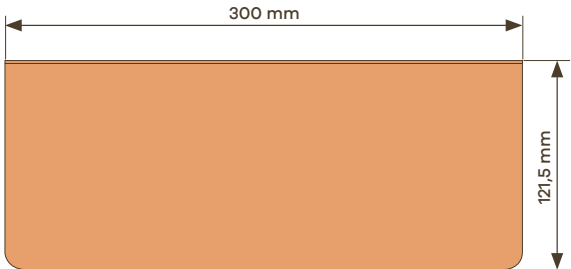

CORNER STAND

Corner shelves in various models for installation on bathroom walls with a ceramic finish. Manufactured from satin-finish AISI 304 stainless steel, 1.5 mm thick. Fixing is done by inserting the support wings into the tile adhesive, positioned at the joints of the ceramic tiles. A high-quality accessory, discreetly integrated into the wall joints.

reference	model
596352995	CLIP CORNER STAND
596353459	MINIMAL CORNER STAND
596353015	DUNES CORNER STAND
596353039	TETRIS CORNER STAND
596353008	BAMBOO CORNER STAND



CLIP CORNER STAND



DUNES CORNER STAND





MINIMAL CORNER STAND



TETRIS CORNER STAND



BAMBOO CORNER STAND

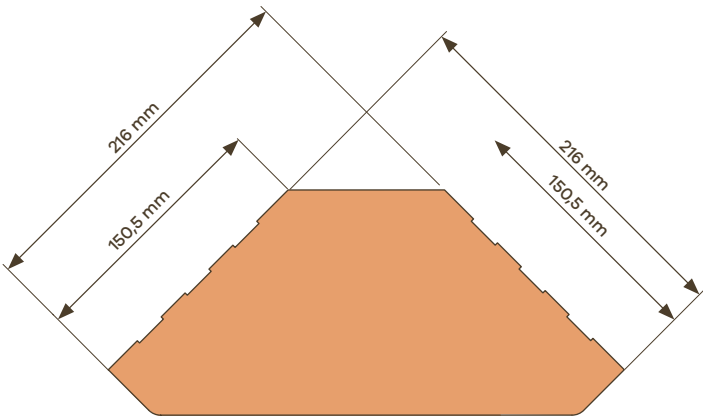

9 UNIVERSE



We are European manufacturers of sustainable, innovative and safe waterproofing systems. We have been leaders in the sector for more than fifteen years. And this is our little great universe, in constant expansion.

Levestech[®]

HISTORY
TRAINING
R+D+I
R+D+I PROJECTS
CERTIFICATIONS
DIGITAL PRESENCE
REFERENCE PROJECTS
EXHIBITIONS
SUMMARY COMPANY

SINCE 1945...



MIGUEL
MARTÍNEZ
RAMÍREZ

It all started more than 75 years ago when our founder **MIGUEL MARTÍNEZ RAMÍREZ** began to write our story, founding MMR in 1945 in Alicante.

The group began its journey selling products for footwear. A short time later, it began its diversification, expanding the markets to saddlery, upholstery, leather-work...

An example of reinvention, hard work, perseverance and resilience.

To this day. The present led by our brand **REVESTTECH**; our main asset oriented to the construction and waterproofing sector.



300 LIVES
4000 PRODUCTS
2000 JOURNEYS
1 STORY

A STORY WITH MANY LAYERS

In 1945, Miguel Martínez Ramírez founds MMR, a leather and saddlery store that, shortly after and due to success, begins to expand and offer more services related to textiles and fabrics for upholstery, with the help of his son.

With the incorporation of the third generation, and after moving to expand the storage capacity, the products that are sold begin to be manufactured and the market diversifies, entering fully into the footwear and toy sector.

Specialization in complete construction systems begins, both for new works and for refurbishment, and showers become an important business focus due to the importance of waterproofing in its logistics and installation.

LEVEL LINE. In 2016 we develop the first product of an innovative design for shower systems: The **LEVEL** invisible prefabricated tray. A very innovative product in designer showers and whose success made the production and handling system evolve for the manufacture of all types of waterproofing and drainage pieces.

Currently, we inaugurate new headquarters with the fourth generation of the Martínez Gil brothers, with a clear and determined vocation for circular economy and the reduction of the carbon footprint. The constant drive toward internationalization, makes Revestech's expansion reach more than 35 countries.

In the 80s, with the rise of plastic, coated fabrics for backpacks, bags and faux leather for upholstery and suitcases were incorporated. At the same time, the service in the world of advertising begins.

In 2006, two main lines of business emerge: Stoppers and buttresses for the footwear market and the manufacture of plastic waterproofing membranes for major brands. Here is, thanks to the good results, where Revestech is born as a brand in its own right.

DRY80 SYSTEM. In 2007 we develop the first waterproofing system for roofs in which we not only care about solving waterproofing problems, but also about its durability, cost-effectiveness and ease of installation.

In this evolution, the success of our **DRY** roof waterproofing system forces us to expand facilities and adapt the manufacturing machinery to the new needs of these markets.


TRAINING

THEORETICAL AND PRACTICAL TRAINING
FACE-TO-FACE COURSES
SPECIALIZED COURSES
WEBINARS
TECHNICAL WORKSHOPS
ACCREDITATION CERTIFICATES
VIDEOS

It is the commitment we acquire with our network of installers, architects and builders. On a monthly basis, we organize free courses and seminars in our facilities, in which we offer to expand professional knowledge by showing our waterproofing systems.

Courses that we accredit with a certificate of Revestech approved installer.

In addition, we carry out webinars, technical workshops and tailor-made courses in companies and in professional technical colleges, anywhere in our country.

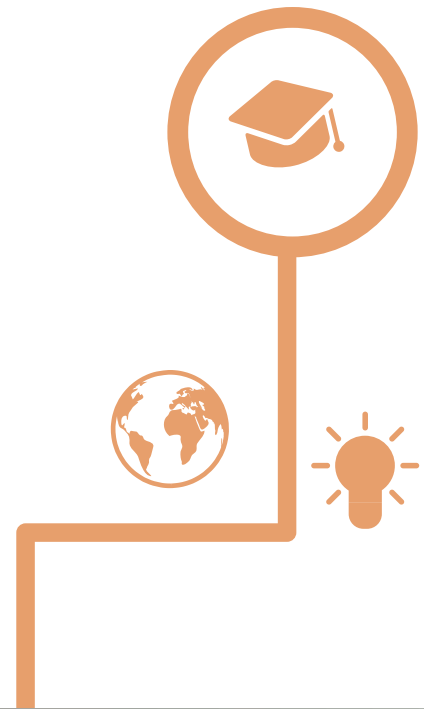




Consult upcoming
courses on our website
or request further
information to:
info@revestech.com
965 10 65 69

revestech®

constant research

Our drive to develop innovative and high-quality constructive solutions is what encourages us to continue investigating.

Our R + D + i department studies and tests new products and systems, in our laboratories and in Research Technical Service in Alicante University (UA); in addition to actively collaborating with other universities, technical institutes and create synergies for the development of innovative projects. Images of the laboratories taken U.A. Research Technical Services.

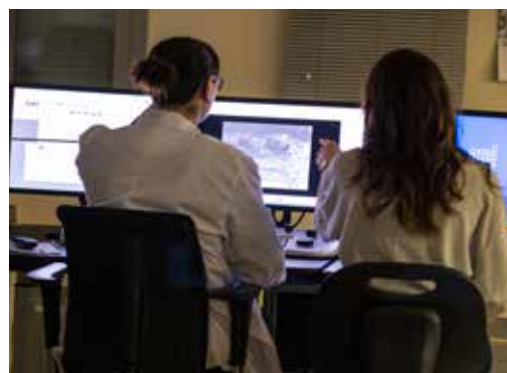

Laboratories at the U.A.
Research Technical Services.

SOLARECODRY²⁰²³

Development of sustainable waterproofing membranes with integrated photovoltaic solar technology.

The SOLARECODRY project promoted by REVESTECH, in collaboration with the Technological Institute of Plastics (AIMPLAS), aims to develop sustainable waterproofing membranes from recycled polyolefins, with integrated photovoltaic solar technology. These are membranes for non-walkable roofs with a double functionality. On the one hand, the waterproofing of roofs and, on the other hand, to take advantage of the location of the roofs to obtain energy from solar radiation, using flexible photovoltaic technology. The Sustainable waterproofing membranes will be manufactured from recycled polyolefins. The material will be developed in the form of a grain suitable to be processed by extrusion lamination and will give value to the waste recycled in Comunitat Valenciana. Flexible photovoltaic solar membranes represent an advance in terms of ease of installation and versatility. As it is a flexible product and adapts to the geometry of the structure, they can be installed on roofs together with the waterproofing membrane. SOLARECODRY is a project funded by the Valencian Institute of Competitiveness and Innovation (IVACE+i), within the Business Aid R+D+i Plan for SME R+D projects (PIDI-CV) in the 2023 call, through ERDF funds.



Financiado por
la Unión Europea

revestech®

Descolam²⁰²²

Development of sustainable thermoplastic membranes with decontaminating properties for construction.

The main objective of the project is the development of new formulations for waterproofing membranes with decontaminating properties from recycled polyolefins, mainly polyethylene, with good technical and environmental properties. The project intends to use different types of titanium oxides (commercialized and prepared in the laboratory) to incorporate in the manufacture of exterior waterproofing membranes, starting from recycled polymeric material. Photocatalysts can be embedded in the polymer of the membrane in order to obtain a multifunctional sheet. The incorporation of photocatalyst in the waterproof membranes will provide them with decontaminating and, at the same time, self-cleaning properties. File number: IMIDTA/2022/21 / Programme: SME R+D Projects (PIDI-CV) / Agency: Valencian Institute of Business Competitiveness (IVACE). Funding from the European Regional Development Fund (ERDF) in a percentage of 60% through the ERDF Operational Program of the Comunitat Valenciana 2014–2020.



Financiado por
la Unión Europea

revestech®

RECImpET²⁰²¹

Development of recycled materials from multi-layer PET packaging waste.

RECImpET project to develop recycled materials from multilayer PET container waste through a novel recycling alternative based on a process of making all materials compatible, without having to separate the different layers. The project focuses on optimizing formulations containing recycled multilayer PET to manufacture waterproofing covers for buildings, footwear components and toy parts, giving a new life to this waste that is currently not being reutilized. Together with Revestech, the company IBERresinas, researchers from the Instituto de Tecnología de Materiales (ITM) from the Universitat Politècnica de València (UPV) and the Technological Institute for Children's Products & Leisure (AIJU, by its Spanish acronym) participate in the project. The project has been carried out based on the patent held by the UPV and AIJU for obtaining recycled material from multilayer PET containers of pre-consumer and post-consumer origin. RECImpET is financed by the Agencia Valenciana de Innovación (AVI), within the programme of strategic projects in collaboration. This programme supports the development of large R&D projects as a way to develop collaborative solutions to problems of common interest.



revestech®

rLAM4BUILD²⁰²¹

Development of new improved laminates for construction, made of recycled material.

The main objective of the research is the development of new formulations of waterproofing membranes for the construction sector from more sustainable materials. It is expected to obtain new formulations with mechanical and thermal properties suitable for subsequent application as waterproofing membranes both indoors under flooring, and outdoors under roofs and terraces. The recovery of polyolefin materials and their application to high added value parts, such as waterproofing membrane to use on rooftops, lead to significant innovation and improvement in terms of sustainability through the introduction of recycled material specially developed for it.



Financiado por
la Unión Europea

revestech®

commitment to quality

The implementation of an Environmental Management System according to the Standard UNE-EN ISO 14001 has allowed us to systematize, in a simple way, the environmental aspects generated in each of our activities, promoting environmental protection and pollution prevention; optimizing resource management and waste, and reducing negative environmental impacts. This management certificate is integrated into our quality system according to the UNE EN ISO 9001 standard, which was implemented in 2019.

We ensure the satisfaction of our customers through continuous and real improvement of our products and services. In addition, our waterproofing membranes have the CE marking, which ensures compliance with mandatory legislation of essential requirements that it can provide to consumers, companies or public administrations information on the safety or performance of the product. At Revestech we have our own and associated laboratories to certify all and each of our products.




UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301

Q U A L I T Y

present in platforms



Our product catalogue is included in the platforms **Cype**, **Acae**, **Presto**. To facilitate the work of construction professionals for the realization, planning, calculation, etc. of their projects.

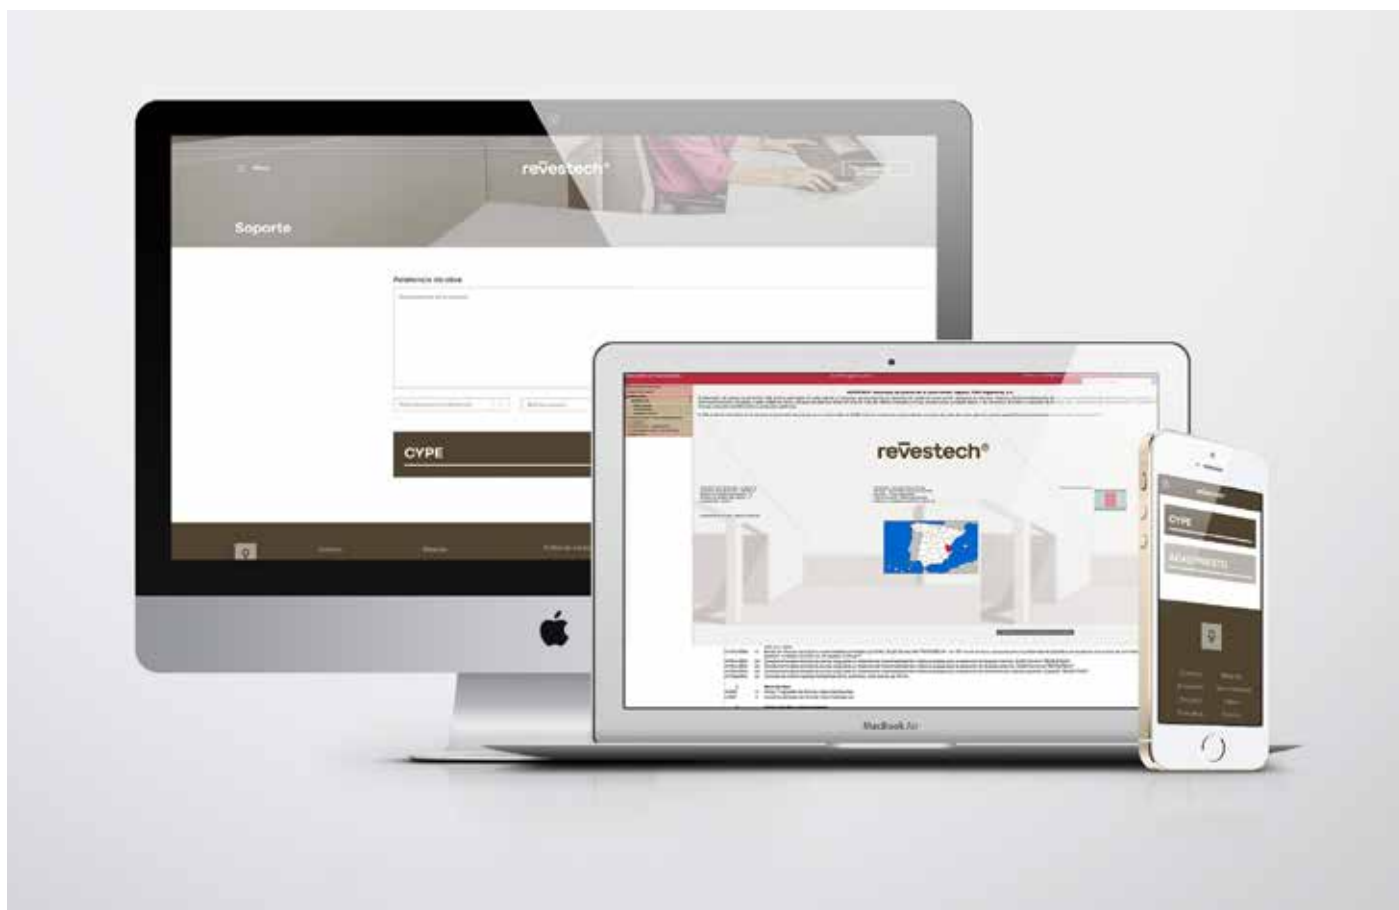

PROJECTS



Waterproofing of 35.000 m² of **DRY120** in all its outdoor walkable terraces. PLAZA PENINSULA MALL. Tijuana. Mexico.



Waterproofing of 20.000 m² of **DRY40** and **DRY120** in all its outdoor walkable terraces. ISTMALL ISTANBUL. Building for offices, university and shopping center. Istanbul. Turkey.




RESIDENTIAL VESEN. 55.000 m² **DRY40** and **DRY50** indoors. **DRY80** on roofs, terraces and outdoor common areas
Istanbul, Türkiye.

PROJECTS



Waterproofing of terraces with **DITEC3** and wet areas with **DRY50**. HOTEL EUROSTARS TORRE SEVILLA****. Seville, Spain.

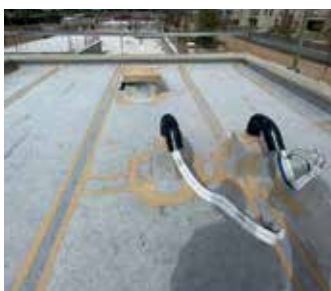


Waterproofing of walkable flat roofs with **ECODRY120**. RESIDENTIAL SINGLE-FAMILY HOMES. Montevideo. Uruguay.



Waterproofing of 18.000 m² with **DRY120** and drainage with **WALK LEVEL**. RESIDENTIAL AND COMMERCIAL URBANA CENTER APOQUINDO. Santiago de Chile.



Waterproofing of 8.000 m² of flat wakable roofs with **DRY80**. Hotel SAINT REGIS Cap Cana. Dominican Republic.

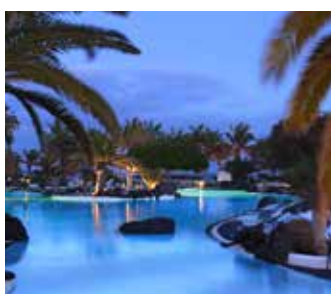

Waterproofing of the interior gardens with **DRY80** designed by César Manrique. Hotel MELIÀ SALINAS Costa Teguise. Tenerife, Spain.



Waterproofing of luxury homes along the Costa Blanca with **DRY80** and **DRY120**. Alicante. Spain.



Waterproofing of roofs with **DRY80**. CARE HOME IN LENSTISCAIS. Castelo Branco. Portugal.

PROJECTS



Waterproofing of terraces with **DRY80**. Hotel H10 ATLANTIC SUNSET***** _ Playa Paraíso_Tenerife, Spain.



Waterproofing of terraces with **DRY80**. Hotel MELIÁ SALINAS***** _ Lanzarote, Spain.



Waterproofing of terraces with **DRY80**. IBEROSTAR LANZAROTE PARK****. Lanzarote, Spain.



Waterproofing with **DRY80** of the pool bar roof of the 5-star resort CHAIN H10_Costa Adeje, Spain.



Waterproofing of battlements and roofs with **DRY80** of the COCENTAINA CASTLE.. Alicante. Spain.



Waterproofing of terraces with **DRY80**. SHOPPING CENTER EL SALADAR_ Fuerteventura, Spain.



Waterproofing of terraces with **DRY80**. Romania.



Waterproofing of wet areas with **DRY50**. RAFA NADAL ACADEMY DE MALLORCA. Manacor (Mallorca). Spain.



Waterproofing of terraces with **DRY80**. SHOPPING CENTER CUADERNILLOS DE ALCALÁ DE HENARES. Madrid. Spain.



Waterproofing of terraces and wet areas with **DRY50**. HOTEL SARDINERO****. Santander. Spain.

PROJECTS



Waterproofing of 2500 m² with **ECODRY120** in luxury villas. Estado de São Paulo, Brazil.




Waterproofing of 700 m² with **ECODRY120** on all its outdoor walkable terraces. Condo in Itapema. Brazil.



Ceramic shower with **LEVEL SHOWER TRAY**.



Ceramic shower with **LEVEL SHOWER TRAY**.

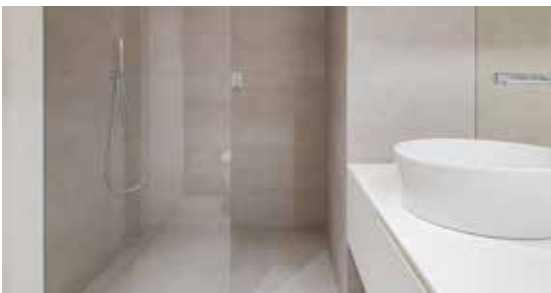

Ceramic shower with **LINEAR LEVEL** invisible tray.



Ceramic shower waterproofing kit **DRY50 LINEAR TILEABLE**.



Ceramic Shower Waterproofing microcement kit **DRY50 LINEAR STEEL**.

NATIONAL AND INTERNATIONAL FAIRS

exhibitions

Our active participation in national and international construction and architecture trade fairs is a testament to our commitment to excellence and innovation.

These fairs represent an invaluable platform where we can highlight our expertise, showcase our products and establish strategic connections with industry leaders and influential professionals.

This is where we share our latest solutions, demonstrate our ability to tackle complex challenges and reinforce our reputation as an industry leader. In addition, these fairs offer us a unique opportunity to understand emerging trends, market needs and our customers' expectations, allowing us to adapt our business strategy to continue leading the way to a stronger, more sustainable future in construction and architecture.



CERSAIE International fair for ceramic tiles and bathroom equipment. Bologna ITALY.



REBUILD Innovation Fair for Building, Industrialized Construction, Digitalization and Sustainability. Madrid. SPAIN.



FEICON International fair for the construction and architecture industry. São Paulo. BRAZIL.



BAU Fair for architecture and building materials. Munich. GERMANY.



YAPI-TURKEYBUILD International Construction Fair Istanbul. TURKIYE.



DECORHOTEL Fair of design, construction, decoration, equipment, products and services for hotels. PORTUGAL.



The Big5 International Construction Fair. Dubai. UNITED ARAB EMIRATES.



revestec

We manufacture for today thinking of tomorrow

The future of construction necessarily involves an ecological review of the processes and materials that have been developed in the past. Our commitment is materialised on a daily basis in greater energy efficiency, the use of environmentally friendly materials and the maximum optimisation of production processes.

We reduce atmospheric pollution by applying circular economy in waste treatment.

We reduce the use of virgin natural resources by designing 100% recyclable products.

We manufacture products free of toxic substances and without the emission of polluting compounds into the environment.

We minimise the generation of waste by transmitting the importance of recovery.

**responsible
waterproofing**


The advantages of being manufacturers

WE CONTROL THE QUALITY:

by manufacturing in-house we control the entire production process, guaranteeing the quality of our products. We establish and apply rigorous quality standards, carrying out inspections at every stage of production.

WE ARE MORE FLEXIBLE AND AGILE:

by having direct control over the production process, we make quicker and more effective decisions. In addition, in-house manufacturing allows us to adjust production to changing market needs and meet specific customer demands.

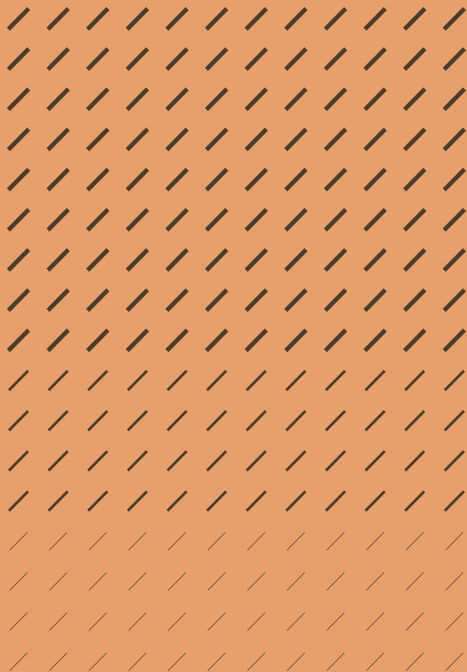





IN MORE THAN 40 COUNTRIES



INNOVATION SINCE EVER

Our philosophy, fundamentally based on business innovation, has led us to develop the study and production of plastic materials for the most diverse professional sectors since 1945, the year in which the group started its activity as a producer of plastic textiles in Alicante.



revestech®

WE ARE MANUFACTURERS

During our long history we have been able to acquire enough experience to become today manufacturers of revolutionary constructive systems. With our brand, Revestech, we have managed to position ourselves as a trusted partner of architects, surveyors, builders and installers when it comes to solving problems of waterproofing, uncoupling, acoustics and drainage, providing a set of comfortable and effective solutions.

Systems approved by:

CSTB AIMPLAS AITEX TCNA IAPMO

INNOVATIVE SYSTEMS

Our systems occupy a completely new place in the market. The fibrous veil of our membranes ensures that the tiles are bonded with tile adhesive, allowing professionals to dispense with the compression layer during installation and making their task as easy as a simple tiling.

CONSTANT RESEARCH

Our concern for developing cutting-edge, high - quality construction solutions is what drives us to never stop researching. Our R+D+ i department studies and tests new products and systems in our laboratories and in the "Research Technical Services" of Alicante University (UA).

QUALITY AND THE ENVIRONMENT

The implementation of an Environmental Management System according to the Standard UNE-EN ISO 14001 has allowed us to systematize, in a simple way, the environmental aspects generated in each of our activities, promoting environmental protection and pollution prevention; optimizing resource management and waste, and reducing negative environmental impacts. This management certificate is integrated into our quality system according to the UNE EN ISO 9001 standard, which was implemented in 2019.

We ensure the satisfaction of our customers through continuous and real improvement of our products and services. In addition, our waterproofing membranes have the CE marking, which ensures compliance with mandatory legislation of essential requirements that it can provide to consumers, companies or public administrations information on the safety or performance of the product. At Revestech we have our own and associated laboratories to certify all and each of our products..



EPD®
UNE-EN ISO 1425:2010, UNE-EN 15804:
EN 15804:2012 + A2:2019 and PCR 2019:14
Register number S-P-07301



PRESENT ON THE PLATFORMS

Our product catalogue is included in the Cype, Acae, Presto and Archiproducts platforms. To facilitate the work of construction professionals for the realization, planning, calculation, etc. of their projects.



STRATEGIC INTERNATIONAL ALLIANCES

Production partnerships are one of the pillars of our business. There are many brands of recognised national and international prestige that trust us to manufacture their waterproofing membranes, thus ensuring that the innovation of our solutions reaches many parts of the world.

revestech®

We can't know exactly how much we have done
for sustainability globally. We can only say with
absolute certainty that WE HAVE WORKED HARD
TO BE TRULY SUSTAINABLE.

WITH OUR HEARTS IN OUR HANDS.



revestech®

REVESTECH® membranes are
GUARANTEED for 10 years from the
date the invoice is issued.
For more details of our guarantees,
you can contact our commercial
department.

WARRANTY
10 years

Systems approved by:

CSTB AIMPLAS AITEX TCNA IAPMO 

Systems present in:



The specifications, measurements and technical characteristics of the products may be modified without prior notice, always looking for improvements or adaptations to new regulations. Revestech reserves the right to remove from its offer those products that it considers should not continue in its catalogue. The environments created in this catalogue are suggestions for installation for advertising purposes, and the actual installation must be based on the instructions in the technical installation manuals, which will be provided by Revestech on request.

**responsible
waterproofing**
