


PANELS
+ SHOWER TRAYS
+ COMPONENTS

TO TILE

FONDAMENTI

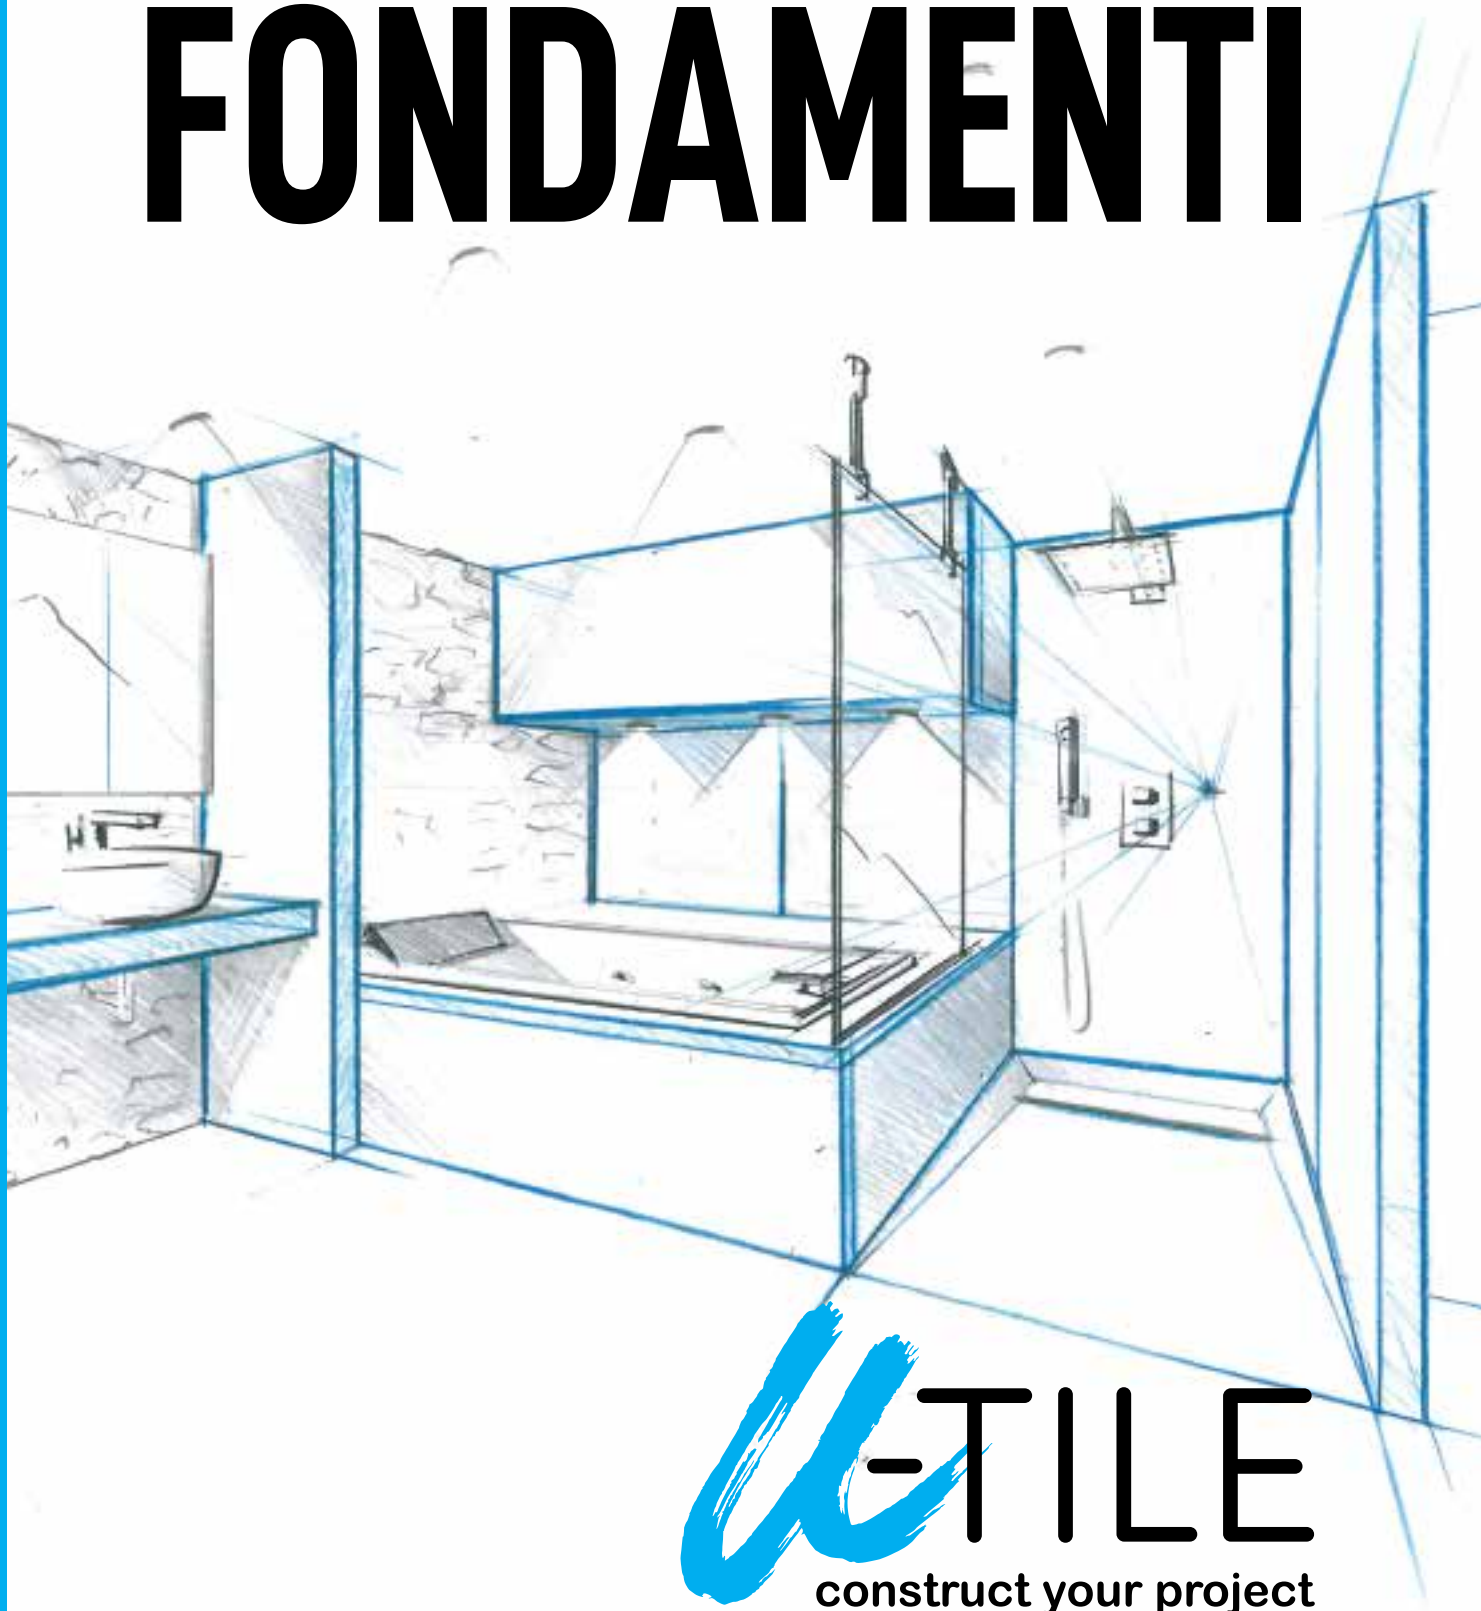

U-TILE
construct your project

Section de douche
à encastrer

Pan
pour
la

Panneau d'anchorage
en recouvrement
minimal 20 mm

Gainage avec
tenue intégrée

READY-TO-TILE CONSTRUCTION PANELS

- 12 — CONSTRUCTION PANELS - NANO BOARD®
- 13 — CONSTRUCTION PANELS - EPOXY BOARD®
- 14 — TILEABLE SHELVES
- 15 — TILEABLE NICHES
- 16 — BATH SKIRTS WITH FEET
- 17 — BATH SKIRTS WITHOUT FEET
- 18 — CONCEALED FRAME CLADDING
- 19 — CONCEALED FRAME CLADDING TOILET KIT
- 20 — GROOVED PANELS FOR CURVED SHAPES
- 21 — ANGULAR PANELS

HAMMAM

- 22 — BESPOKE HAMMAMS

FLOOR DRAIN SOLUTIONS

- 30 — SHOWER FLOOR DRAIN - 360° JAMES
- 31 — SHOWER FLOOR DRAIN - ULTRA FLAT - SLIM
- 32 — SHOWER CHANNELS
- 32 — SHOWER CHANNELS - NEW GENERATION

READY-TO-TILE SHOWER TRAYS

- 40 — STANDARD GRIDS
- 41 — CHANNEL GRIDS
- 42 — TILEABLE SHOWER TRAYS - FLAT BOARD®
- 43 — TILEABLE SHOWER TRAYS - SLIM BOARD®
- 44 — TILEABLE SHOWER TRAYS - COMPACT BOARD®
- 45 — TILEABLE SHOWER TRAYS - COMPACT BOARD® LINE
- 46 — TILEABLE SHOWER TRAYS - MONO BOARD®
- 47 — TILEABLE SHOWER TRAYS - LINE BOARD®
- 48 — TILEABLE SHOWER TRAYS - FLAT BOARD® KIT COMPLETE
- 49 — TILEABLE SHOWER TRAYS - LINE BOARD® KIT COMPLETE

50 — SUMMARY DIMENSION TABLES



A hand-drawn architectural sketch of a shower enclosure. The sketch shows a rectangular shower pan with a central drain, surrounded by walls. Dimensions are noted: '80 cm' for the width, '45' for the depth, and '85' for the height. The text 'support whole structure' is written in the top left corner. The drawing is done in a sketchy, hand-drawn style with lines and shading.

80 cm
support
whole structure

We have been one of the world's leading building panel companies for 30 years. In 2013, we created the famous honeycomb, we developed in 2017 a new patented generation of tileable panels, more waterproof than its competitors, lighter, stronger and easier to cut

The Epoxy Board building panel is the base material for a global range that is focused on renovating and building trendy bathrooms. Beyond the traditional ranges of tileable panels that will allow you to clad and build walls, floors and bathroom furniture, our aim is to offer our distributors and customers, a complete, and unique, range of shower solutions. Italian-style.

We have developed three innovative solutions for you to make the Italian shower of your choice:

- Traditional floor drain solutions
- Tiling solutions with a wide range of Tileable Shower Trays
- Designer and contemporary solutions with solid surface resin or natural stone shower trays, as well as their corresponding walls panels.

In order to complete our innovative approach, we offer, in addition, customized solutions on demand (special colours, bespoke products...).

Check us out, and we'll offer you a bathroom that looks just like you want.



-
**NEW
PATENTED
CONCEPT**
-

WATERPROOF
ULTRA LIGHT
EASY TO CUT
READY TO TILE
READY TO PLASTER
ALL DIMENSIONS

READY TO TILE
**CONSTRUCTION
PANELS**

**WATERPROOF WALL CLADDING
UNDERFLOOR HEATING INSULATION
BATHROOM SEPARATOR PARTITIONS
BATHROOM FLOOR HEIGHT ADJUSTMENT
BATHTUB SKIRTS
HAMMAM WALL PLANS
BASINS**

FABRICATION OF TILED BATHROOM FURNITURE



MUCH LIGHTER
-
ULTRA EASY CUTTING
-
ENHANCED WATERPROOFING
-
GUARANTEED MECHANICAL RESISTANCE
-
STRONGER ADHESION AND TILING THANKS TO
THE OUTER FIBRE
-
NO CUTTING WASTE (CLEAN SITE)
-
EXCELLENT DIMENSIONAL STABILITY

ENHANCED
MECHANICAL
RESISTANCE




Guaranteed
Piercing
Resistance

CAN BE CUT



ULTRA EASY CUTTING

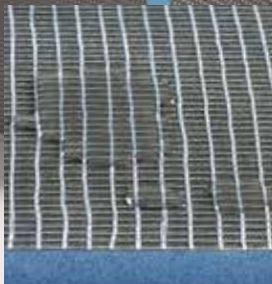

100% WATERPROOF
BEADING EFFECT



GUARANTEED
MECHANICAL RESISTANCE




ULTRA LIGHT

READY TO TILE CONSTRUCTION PANELS

In 2013, we created the famous honeycomb, and in 2017 we developed a new patented generation of tileable panel, more waterproof than its competitors, lighter, stronger and easier to cut

The Epoxy Board panel is the base material for a global range that is focused on renovating and building trendy bathrooms.


Beyond the traditional ranges of tileable panels that will allow you to clad and build walls, floors and bathroom furniture. Our aim is to offer our distributors and customers a complete, and unique, range of solutions. for Italian showers.

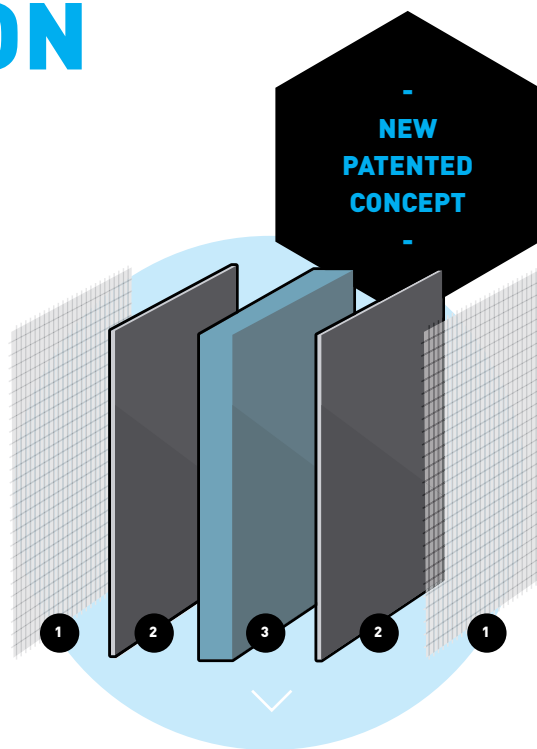

Composition of an Epoxy Board panel

- 1 – Fibreglass Mesh exterior
- 2 – Polymerized cement mortar
- 3 – Extruded Polystyrene

Different types of construction panels :

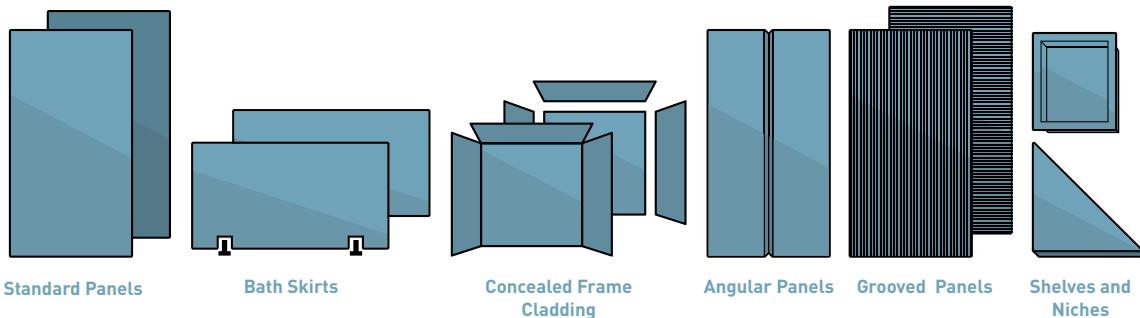

			Thickness in mm									
			4	6	10	12.5	20	30	40	50	80	
Description	Test	Result	Tile thickness adjustment									
			Levelling / Floor Covering									
			Wall Cladding									
			Window Forming									
			Concealed Frame Cladding									
			Bath Skirts									
			Podiums / Plinth's									
			Construction of Tiled Furniture									
			Tileable Partition Walls									
			Insulation – Wall / Floor / Roof									
Thermal Conductivity up to 5 yrs	DIN 52612	0.034 +0,02	✓	✓	✓							
Compression force at 10% deflection	DIN 53421	300KN/m2 at 10% deflection		✓	✓	✓	✓	✓	✓	✓	✓	
Absorption of water when immersed	DIN 53428	0,2% per volume of water	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Absorption of water (capillary)	DIN 53428	Negligable				✓						
Fire Characteristics	"BS476 PART 6.7 EN 13501-1"	Class E			✓	✓	✓	✓	✓	✓	✓	

Technical features of standard panels

Where to Use




GROOVED PANELS

- The construction panels allow you to make lasting and creative renovations of your bathroom
- **WATERPROOF CLADDING OF FLOORS AND WALLS**
- **UNDERFLOOR HEATING INSULATION**
- **BATHROOM SEPARATER PARTITIONS**
- **FLOOR HEIGHT ADJUSTMENT IN BATHROOMS**
- **FLOORING**
- **BATH SKIRTS**
- **HAMMAM WALLS**
- **BASIN PLANS**
- **MANUFACTURE OF TILED BATHROOM FURNITURE**

The sizes of the panels (125x60 cm or 250x60 cm), in thicknesses from 4 to 80 mm offer professional's versatility in the use of panels, and allow them to carry out a very large range of renovations or construction in the bathroom, as well as in the other rooms of the house. The new patented panel consists of an extruded polystyrene panel, a cement-based mortar modified with epoxy components, and fiberglass positioned on either side of the panel, with mortar on the exterior. . This panel composition gives the products unique advantages in comparison with standard cement-based construction panels.

Panels are available on request with vapour barriers for steam rooms and Hammams.

Available in 90 cm and 120 cm wide — Other lengths on demand

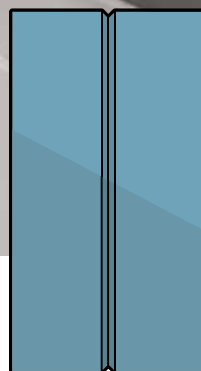

ANGULAR PANELS

- The angular panels will help you quickly clad right angles and insulate often unsightly pipes in bathrooms
- **ANGULAR PANELS**
- **CORNER FORMWORK**
- **PIPE COVERING**
- **CLADDING OF STAIRS / STEPS**
- **LIGHT SHELIVING**

Angles are available in 4 widths (150 x 150 mm, 200 x 200 mm, 300 x 300 mm, and 400 x 200 mm). These formats allow the user to make formwork, wall coverings and angles quickly. Its most common use is the covering of angles and pipes in the wet areas. Often unsightly, pipes are a thermal bridge. The corner coverings make it possible to clad the pipes.

**FLAT PACK DELIVERY TO AVOID
BREAKAGE DURING TRANSPORTION**




BATH SKIRTS

From standard bathtubs to the corner bathtub, we offer a variety of solutions to quickly enclose your bath.

• STANDARD BATHTUBS

The bath skirts consist of a classic panel with a thickness of 3 cm, to which are added Leveling Feet (2 per panel) allowing, after bedding the bath, the raising of the skirt using a key, in order to ensure better system stability. Bath skirts are often more economical and faster to install than standard brick solutions, in addition they provide a more aesthetic solution because they allow immediate tiling with mosaics or the same tiles as the rest of the bathroom.

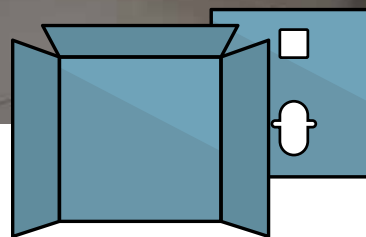


CONCEALED FRAME CLADDING

- CLADDING FOR WALL HUNG FRAMES
- CLADDING FOR WALK IN SHOWER FRAMES

Cladding a support frame is often problematic and costly. The support frame cover kit allows you to clad a support frame with reliability, security and speed. In addition to speed, the cladding is ready-to-plaster, ready-to-tile and waterproof. The kit offers a format of 130 cm in height with a shelf return of 32 cm, as well as a width of 100 cm. This configuration allows you to adapt to any support structure on the market, as well as to versions for people with reduced mobility (PRM). The time saved in installing the support frame is extremely advantageous and economical: around 50% compared to traditional solutions. The support frame covers can also be used for wall-mounted drains of walk-in showers such as shower support frames. They will allow you in addition to the support frame shower, to be able to make a half-height shelf for household products, or to house a shower column for PRM installations.

Cladding a concealed support frame has never been easier, faster and safer than with this product designed for every building on the market.



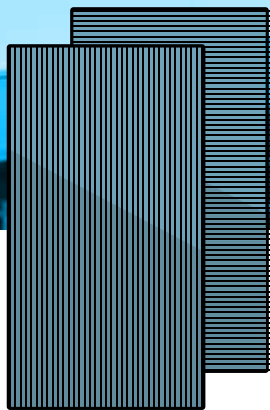

GROOVED PANELS FOR CURVED SHAPES


The range of grooved panels, available in two formats (grooving in width or length), will allow you to fit all shapes of your bathroom or creatively create irregular shapes

- CLADDING THE CURVES IN THE BATHROOM
- CLADDING OF BASIN PEDESTALS
- CLADDING CORNER BATHTUBS / SPA BATHS
- CREATION OF HAMMAM ROOF ARCHES
- CREATION OF TILED BENCHES

Available in size of 2.50 x 0.60 m and a thickness of 30 mm, the curved panels are optionally grooved in length or width. This system thus offers more versatility to the panels, to fit all curved shapes in your bathroom or your home.


The very easy adjustment and flexibility will allow professionals to adapt all curved surfaces, also bringing creativity to the renovation or construction of bathroom furniture.

Available 20 to 80 mm thick on demand

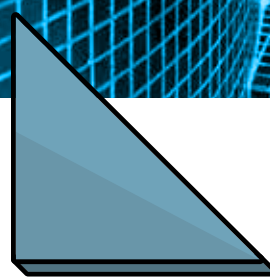

TILEABLE SHELVES

What could be better than a designer touch to complete the finishing of your bathroom. This is what we offer you with an ergonomic corner shelf in trendy design. This small corner shelf and its fixing kit will fit everywhere in the bathroom and in the shower. Ideal for new or renovation. A choice.




TILEABLE NICHES

Our company offers you this year a range of niches to be tiled. Available in different sizes, these niches will allow you to create recesses in your shower or bathroom, with simplicity and speed. Elegant and design, once tiled, these niches offer the guarantee of a waterproof product.


OUR RANGE OF ACCESSORIES

FOR THE INSTALLATION OF CONSTRUCTION PANELS



REINFORCEMENT TAPE


25m x 10cm fiberglass reinforcement tape used to reinforce and joint the panels together. To be used in addition to a waterproof adhesive mortar.
REF. ACC001



WATERPROOF TAPE

Waterproof tape 10 m x 12.5 cm, used to seal the joints between the shower tray and the walls, or between the walls. This strip is equipped with an elastomer layer and a polyester mesh layer to allow a good joint and a perfect seal. Available in rolls of 50 m.

REF. ACC002



WATERPROOF CORNERS

Available in regular or inverted formats, the sealing corners provide waterproofing in addition to the strips or mats, in the most difficult to seal corners.


REF. ACC003



FIXATION WASHERS

Washers that accommodate the fixation screws that anchor in the mortar while ensuring a firm grip on the panels.


REF. ACC004



WALL ANCHORS

Wall anchors are used for panel connections to the wall and the floor. These anchors ensure that the panels stay in place and allow the construction of shelving or bath skirts


REF. ACC005



PERPENDICULAR ANCHORS

Perpendicular anchors are used for inter-panel fastening, to ensure a firm grip of the panels while the PU adhesive dries.

REF. ACC006



JOINT BRACKETS

The Joint Brackets are used to connect vertical panels, in order to improve overall strength. The brackets are pushed into the polystyrene and attached to the wall and are used in conjunction with PU Glue.


REF. ACC007



POLYMERIZED WATERPROOF MORTAR

Polymerized waterproof adhesive mortar which ensures the bonding and sealing of the reinforcing strips and waterproof strips. Delivered in a 5 kg bag - Available in larger packaging.

REF. ACC008



POLYURETHANE GLUE (PU)

Mono component Polyurethane Glue in cartridge, for fixing the panels together (corners or straight). Strong, fast bonding.

REF. ACC0010



SELF ADHESIVE WATERPROOF TAPE

The self-adhesive waterproof tape is equipped with a butyl underlay to ensure self-adhesion to the panels and to seal quickly.


REF. ACC011



PROFILE FOR TILE WALL 8 CM

8 cm wide U-profile for holding tileable panels for wall partitions for showers or bathroom furniture constructions - available in 5 cm on request.

REF. ACC018

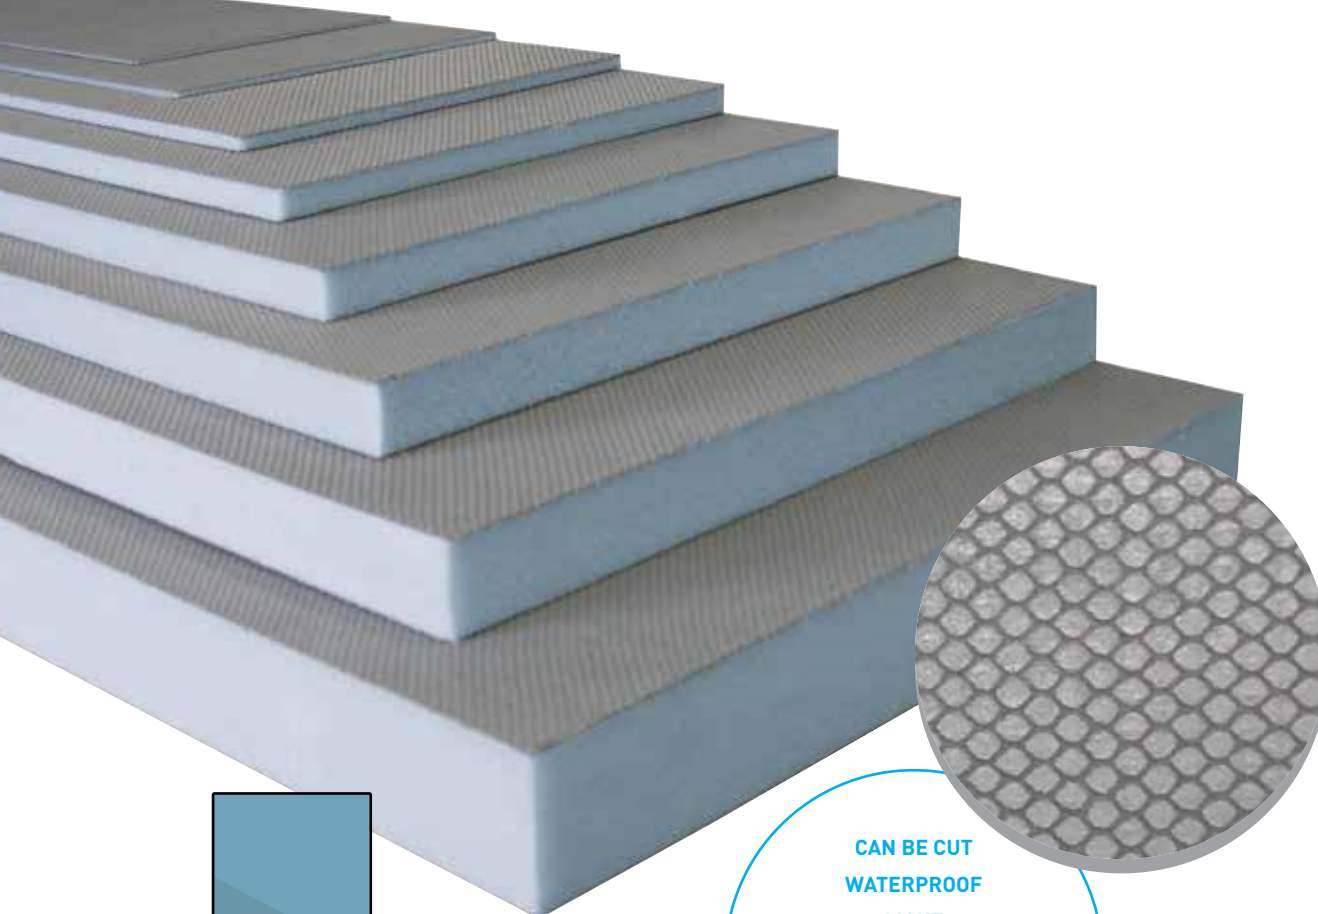

CAN BE CUT
WATERPROOF
LIGHT
READY TO TILE
READY TO PLASTER
ALL SIZES

READY TO TILE


NANOBOARD CONSTRUCTION PANELS

The sizes of the NanoBoard© (125x60 cm or 250x60 cm) panels, in thicknesses of 4 to 80 mm, offer professionals versatility in the use of panels, and allow them to carry out a very large number of renovations or constructions in the bathroom area, as well as in the other rooms of the house

The excellent properties of our honeycomb mortar allow NanoBoard © panels to be installed on a large number of substrates, and to apply an infinite number of surface facings (tiles, resin, waxed concrete, pebbles, mosaics....)–

REF	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	U VALUE (W/m2K)	R VALUE (m2.K/ W)	QUANTITY PER PALLET
4 MB 125	4	600	1250	2.3	9.9	0.06	165
6 MB 125	6			2.4	7	0.12	150
10 MB 250	10			5.4	3.5	0.25	215
125 MB 250	12.5		2500	5.6	2.7	0.33	150
20 MB 250	20			6.2	1.5	0.56	106
30 MB 250	30			6.8	1	0.86	75
40 MB 250	40			8	0.7	1.16	60
50 MB 250	50			8.4	0.57	1.47	45
80 MB 250	80			10	0.5	2.33	25

Panels are available in 260cm length on special order

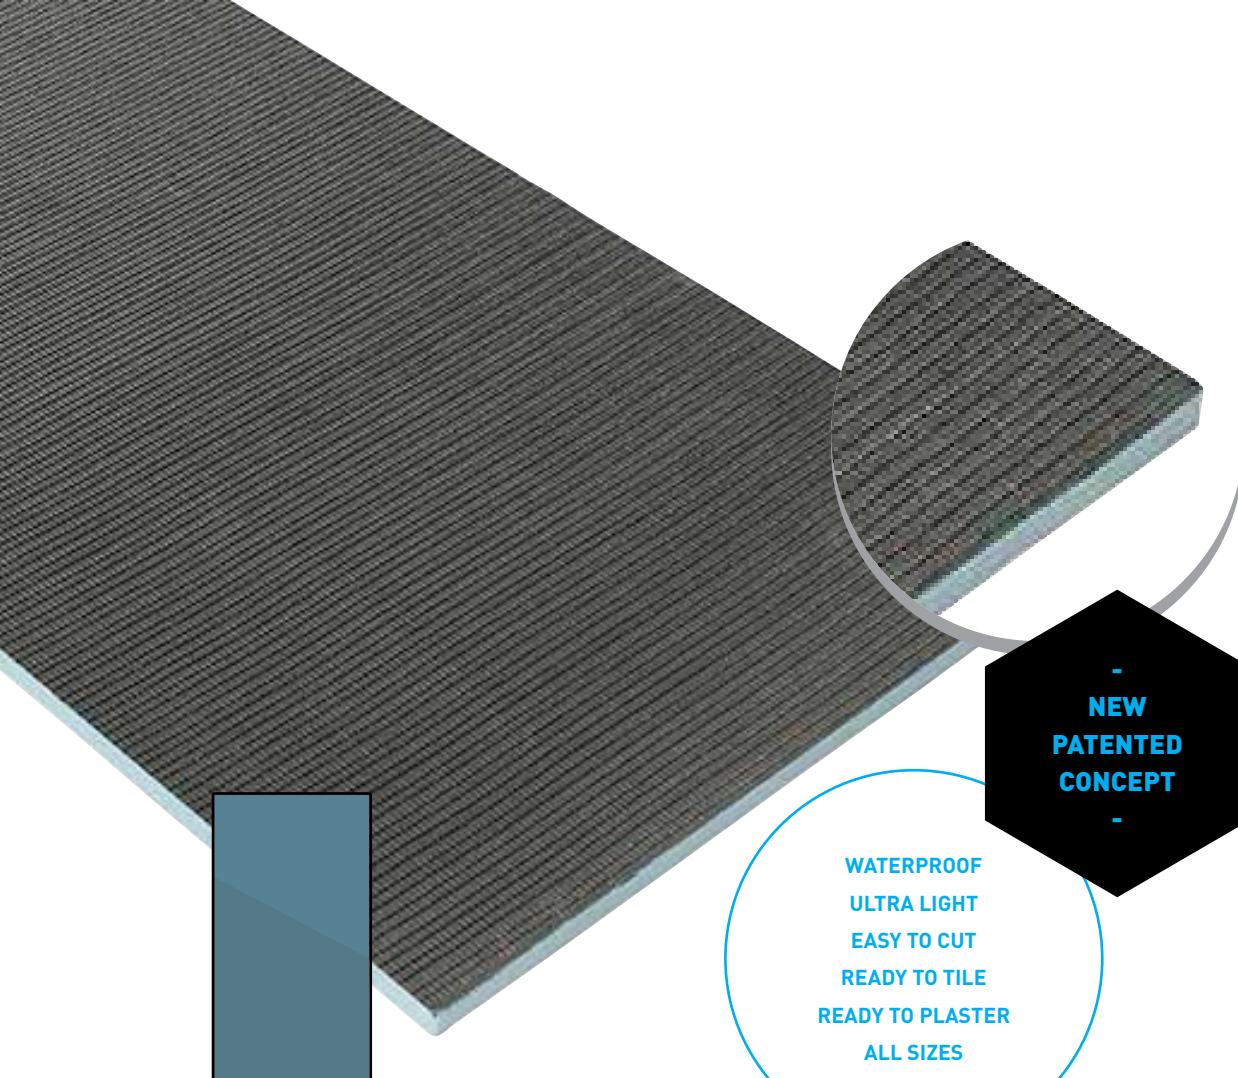

READY TO TILE



EPOXY BOARD CONSTRUCTION PANELS

The sizes of Epoxy board® panels offer professionals versatility and allow renovations or constructions of the bathroom and other rooms of the house


This new patented panel consists of an extruded polystyrene panel, a cement-based mortar modified with epoxy components, and fibreglass positioned on either side of the panel, on the outside of the mortar. This panel composition gives products unique advantages compared to standard cement-based construction panels on the market, such as its lightness and ease of cutting -

REF	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	U VALUE (W/m2K)	R VALUE (m2.K/ W)	QUANTITY PER PALLET
4 EB 125	4	600	1250	0.98	9.9	0.06	165
6 EB 125	6			1.02	7	0.12	150
10 EB 250	10			2.25	3.5	0.25	215
125 EB 250	12.5		2500	2.33	2.7	0.33	150
20 EB 250	20			2.7	1.5	0.56	106
30 EB 250	30			3.15	1	0.86	75
40 EB 250	40			3.6	0.7	1.16	60
50 EB 250	50			4.05	0.57	1.47	45
80 EB 250	80			4.13	0.5	2.33	25

Panels are available in 260cm length on special order

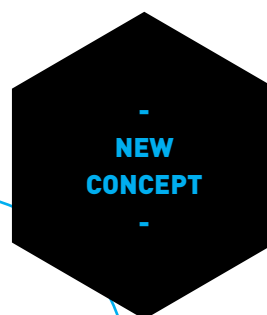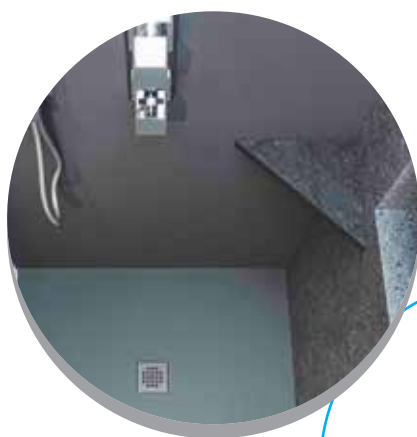

LIGHT
EASY TO INSTALL
CARRIES UP TO 15 KILOS
NEW BUILD OR
RENOVATION


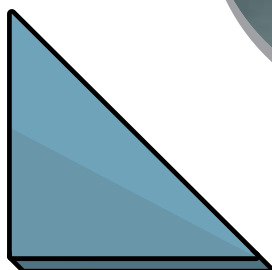


READY TO TILE TILEABLE SHELVES

Design is often due to the little things. To details like this triangular corner shelf that will adapt to your bathroom. Ideal for new or renovation, this customizable shelf supports, with its fixing kit, a load of up to 15 kilos.

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT (KG)	QUANTITY PER BOX
TILE CORNER	TILEABLE SHELF FOR BATHROOM	30	240	240	0.5	1 Piece

Delivered in individual boxes.

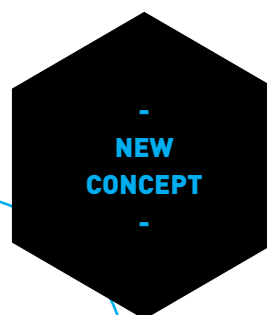


LIGHT
EASY TO INSTALL
CARRIES UP TO 15 KILOS
NEW BUILD OR
RENOVATION

READY TO TILE TILEABLE NICHE

Are you short of space to put your beauty products and you don't have the space to put a corner shelf in your shower or bathroom? Create a recess in an elegant and designer way with the ready to tile niches. Designed in a waterproof and robust way with tileable panels, our different size niches can be installed in all humid interiors in a secure and waterproof way.

REF	DESCRIPTION	THICKNESS (MM)	DEPTH (MM)	LENGTH (MM)	WIDTH (MM)	WEIGHT (KG)	QUANTITY PER BOX
NICHE 4020	TILEABLE NICHE FOR BATHROOM	10	100	400	200	2	1 Piece
NICHE 4030					300		
NICHE 4040					400		
NICHE 8025				800	250	2.5	

Available in 4 sizes. Custom sizes are possible.

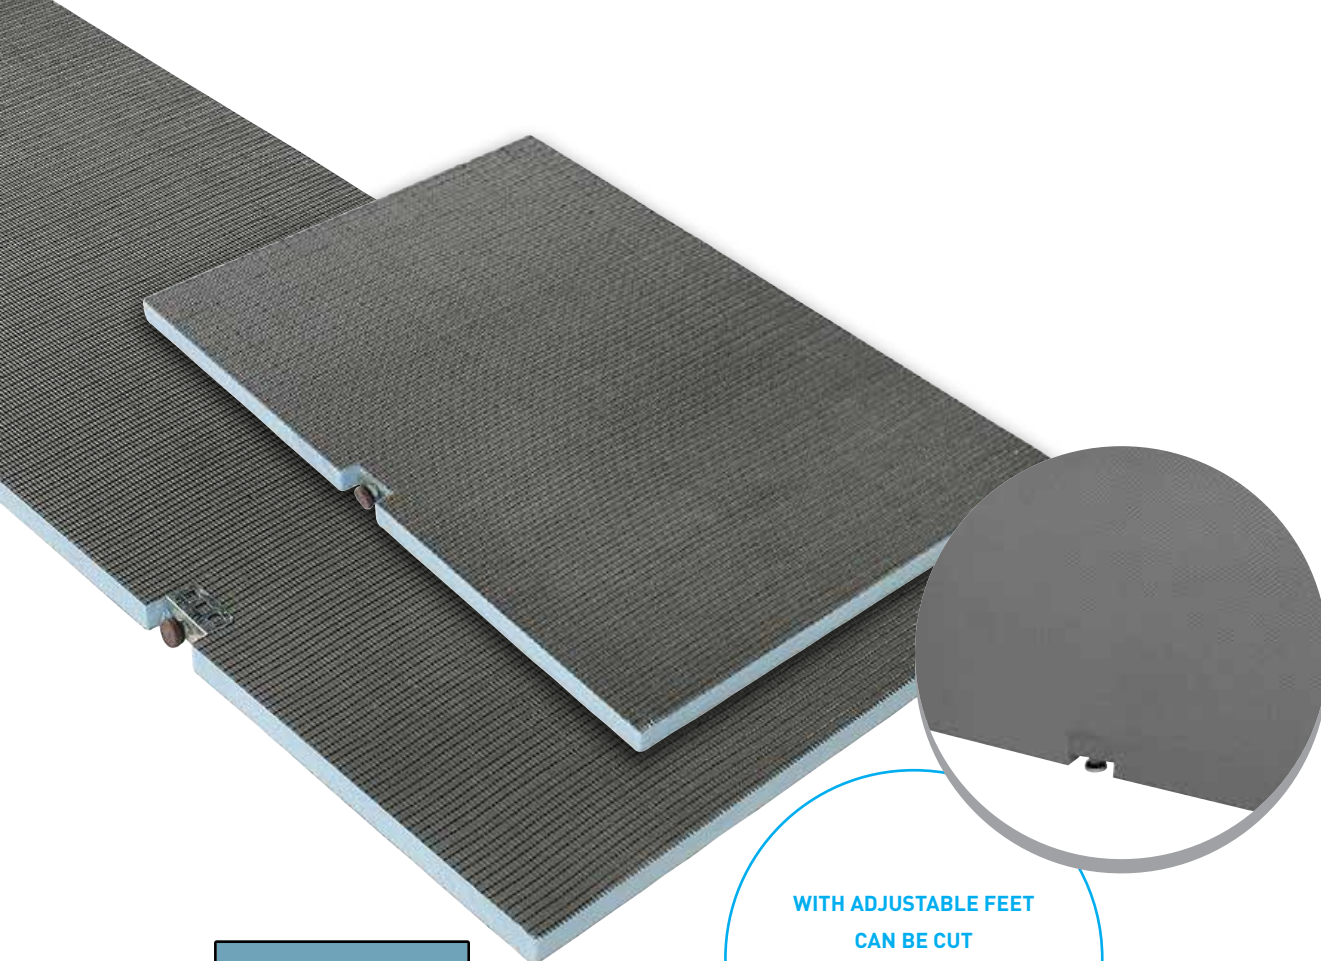

WITH ADJUSTABLE FEET
CAN BE CUT
GROOVED OPTION
FOR CORNER BATHS


READY TO TILE BATH SKIRTS WITH FEET

From the standard bathtub to the corner bathtub, we offer various solutions for quickly cladding your bath skirt

The bathtub skirts consist of a classic construction panel with a thickness of 3 cm, to which are added levelling feet (2 per panel) allowing, after bedding the bathtub, to raise the skirt using a key, to ensure better system stability. Bathtub skirts are more economical, faster than standard solutions, and represent a more aesthetic solution because they allow to tiling or finishing identical to the rest of the bathroom -

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
30 TAB 90	Skirt With Feet	30	600	900	1.2	75
30 TAB 180				1800	2.4	75

Delivered in individual boxes.

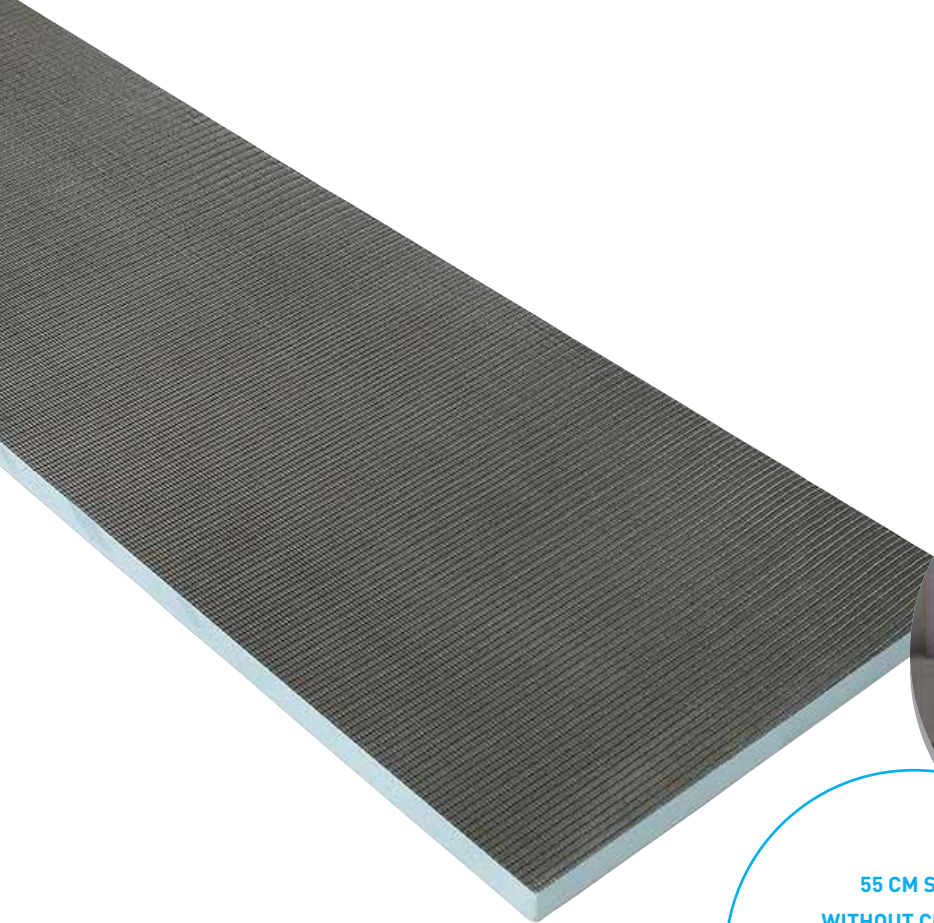

55 CM SIZE
WITHOUT CUTTING

WITHOUT FEET
CAN BE CUT





READY TO TILE **BATH SKIRTS** **WITHOUT FEET**

Discover our economical format of panel intended to clad baths.

More economical than a standard 30 mm panel, this table is ideal for developers or builders. We offer an original width of 55cm which will avoid cutting on site -

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
30 EB 185 55	Skirt Without Feet	30	550	1850	2.4	75
30 EB 177			600	1770	2.4	75

Delivered in individual boxes.

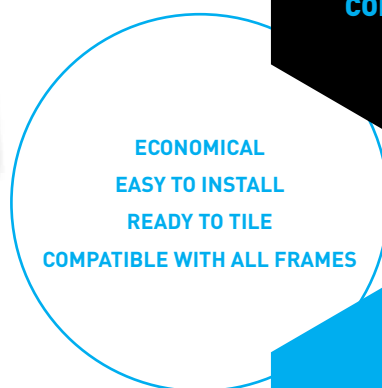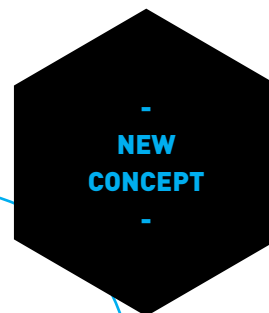

READY TO TILE CONCEALED FRAME TOILET BOARD CLADDING

With always keeping budgets in mind and simplifying the job of bathroom installations, we have designed a support frame cladding that is more economical and easier to install. Designed with a 155 x 120 cm plate, this product will resist puncture and will give your installation a waterproof and ready-to-tile medium.

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT (KG)
TOILET BOARD	Concealed Frame Cladding - Pre-Cut	20	1200	1550	4

Can be cut to fit all heights.




READY TO TILE CONCEALED FRAME TOILET BOX CLADDING

Cladding a support frame is often problematic and costly. The support frame cladding kit allows you to build the cladding with reliability, security and speed. In addition, it is ready-to-plaster, ready-to-tile and waterproof. The proposed kit consists of 4 panels to adapt to all situations. The time saved in installing the support frame is extremely advantageous and economical: around 50% compared to traditional solutions.

The support frame cladding can also be used for wall-mounted drains of walk-in showers such as shower support frames. They will allow you in addition to the support frame shower, to be able to make a half-height shelf for household products, or to house a shower column for PRM installations.

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT (KG)
TOILET BOX	Tileable Support Frame Cladding Kit	30	600	1250	4

Can be cut to fit all heights.

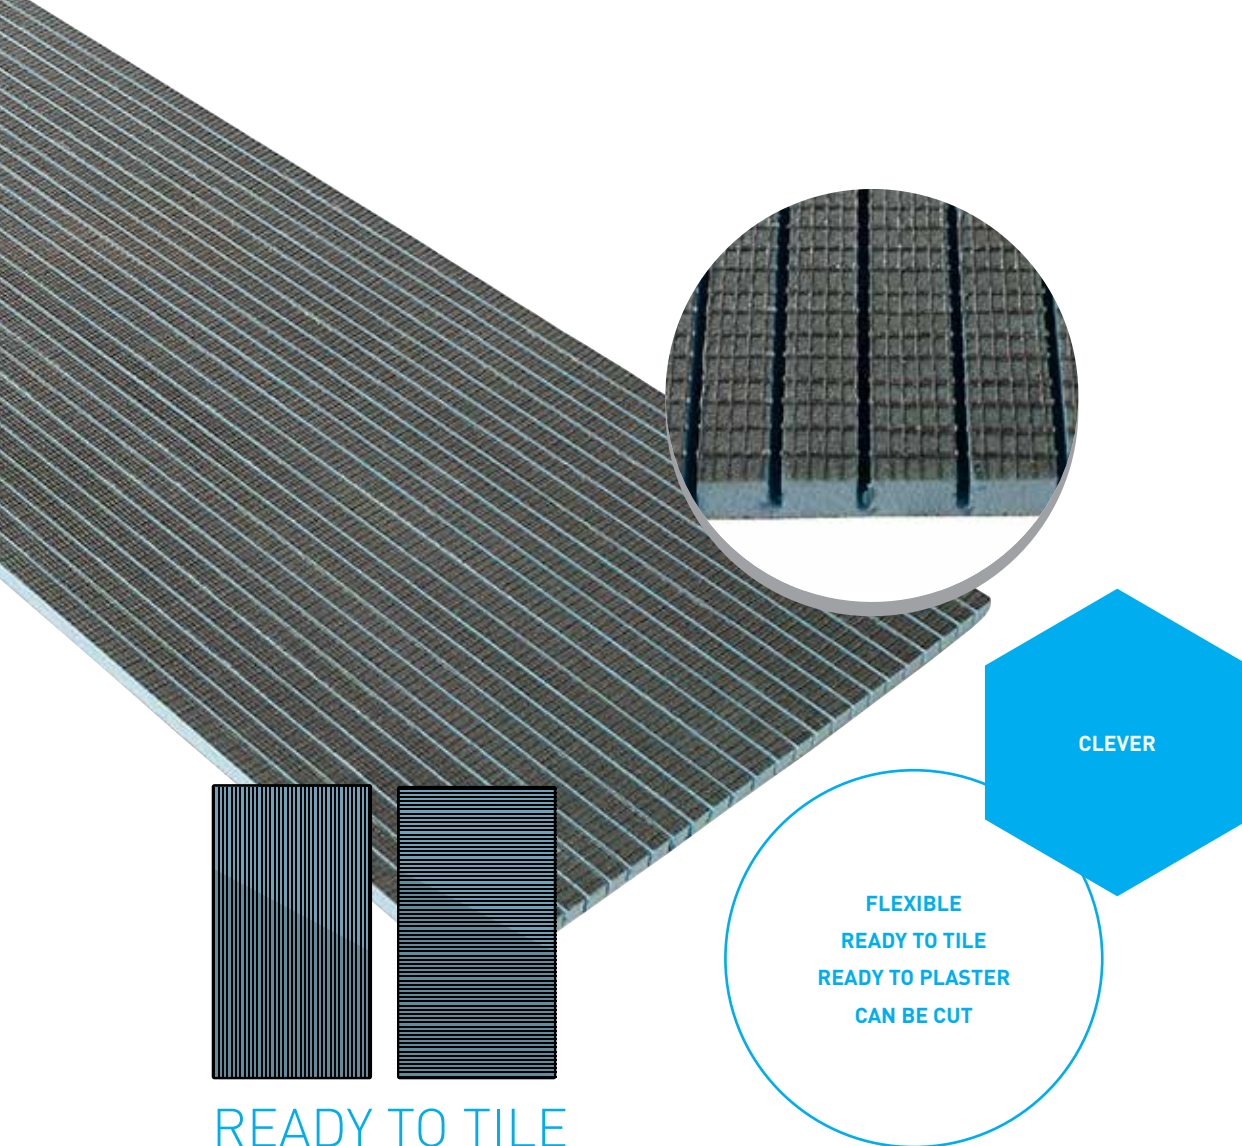

READY TO TILE GROOVED PANELS FOR CURVED SHAPES


CURVES IN THE BATHROOM | BASIN PEDASTALS | CORNER BATHS / SPA BATHS | ROOF ARCHES FOR HAMMAMS | TILEABLE BENCHES

The range of grooved panels, available in two sizes (groove in width or length), will allow you to embrace all shapes of your bathroom or create irregular shapes with creativity

Available in a format of 2.50 x 0.60 m and a thickness of 30 mm, the curved panels are optionally grooved in length or width. This system thus offers more versatility to the panels, to fit all curved shapes in your bathroom or your home. The very easy adjustment and flexibility will allow professionals to adapt all curved surfaces, also bringing creativity to the renovation or construction of bathroom furniture.

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
30 JAGL 250	Grooved Panel - along length	30	600	2500	2.5	75
30 JAGW 250	Grooved Panel - along width					

Available from 20 to 80 mm thick on demand

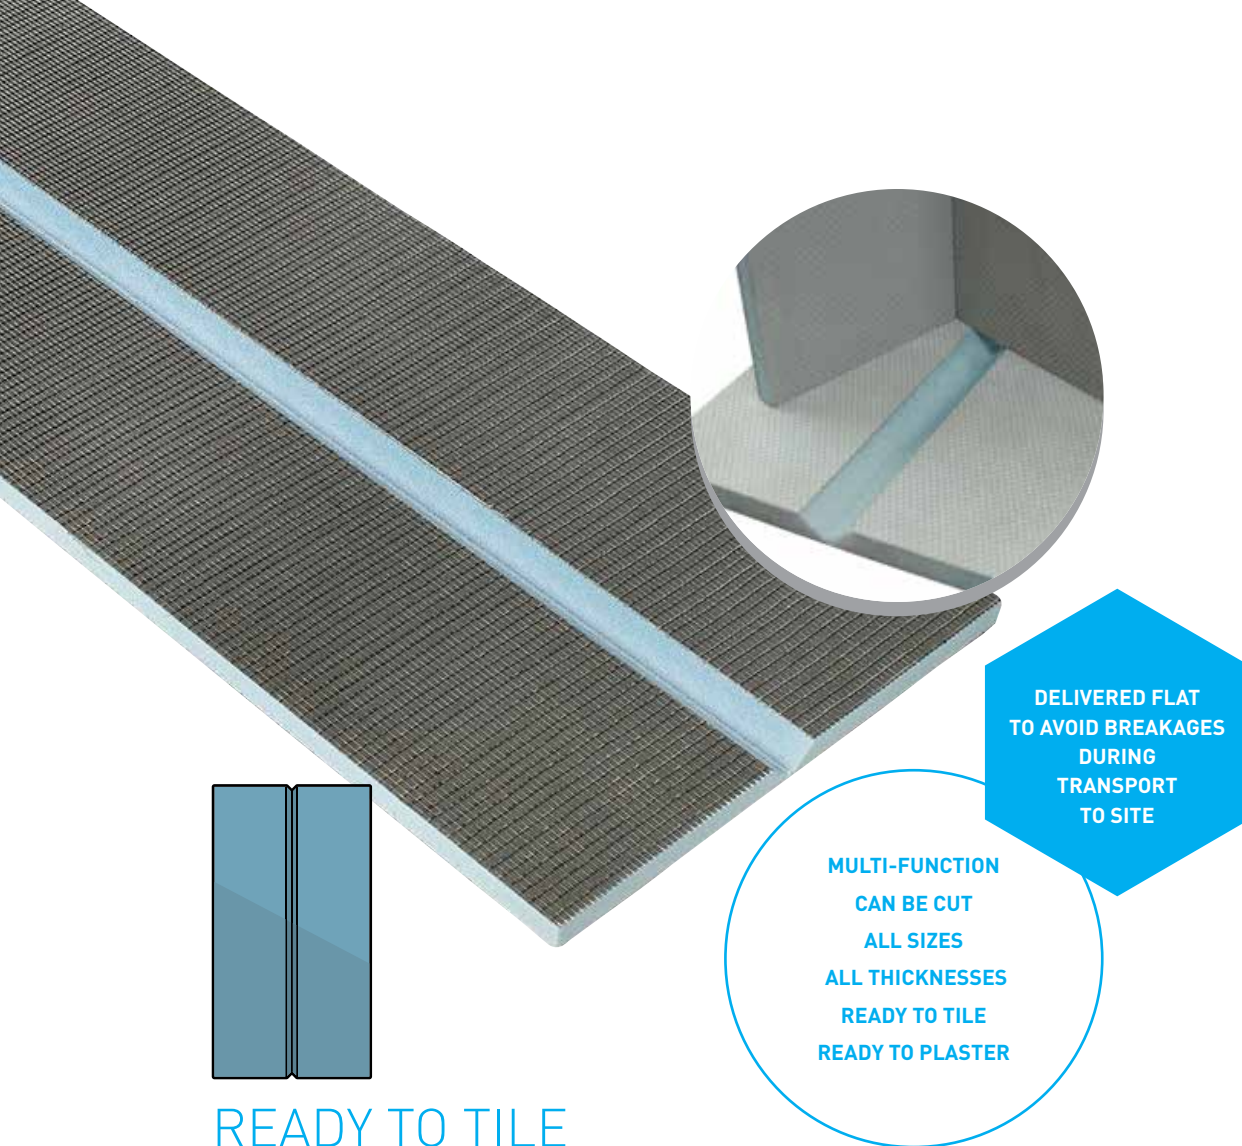

READY TO TILE ANGULAR PANELS


**BOX FORMWORK | PIPE BOXING
STEP CLADDING | LIGHTWEIGHT SHELVES**

Angular panels will help you quickly clad right angles and insulate often unsightly pipes in bathrooms

The angular panels are available in 4 widths (150 x 150 mm, 200 x 200 mm, 300 x 300 mm, and 400 x 200 mm). These sizes allow the user to quickly produce formwork, wall and corner cladding. The most common use is for cladding corners and pipes in wet areas. Often unsightly, pipes form a thermal bridge

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)
20 ANG 150	Angular Panel 15 x 15 cm	20	150 x 150	2500	1.6
20 ANG 200	Angular Panel 20 x 20 cm		200 x 200		2
20 ANG 300	Angular Panel 30 x 30 cm		300 x 300		3.2
20 ANG 400200	Angular Panel 40 x 20 cm		400 x 200		

Available from 20 to 80 mm thick on demand

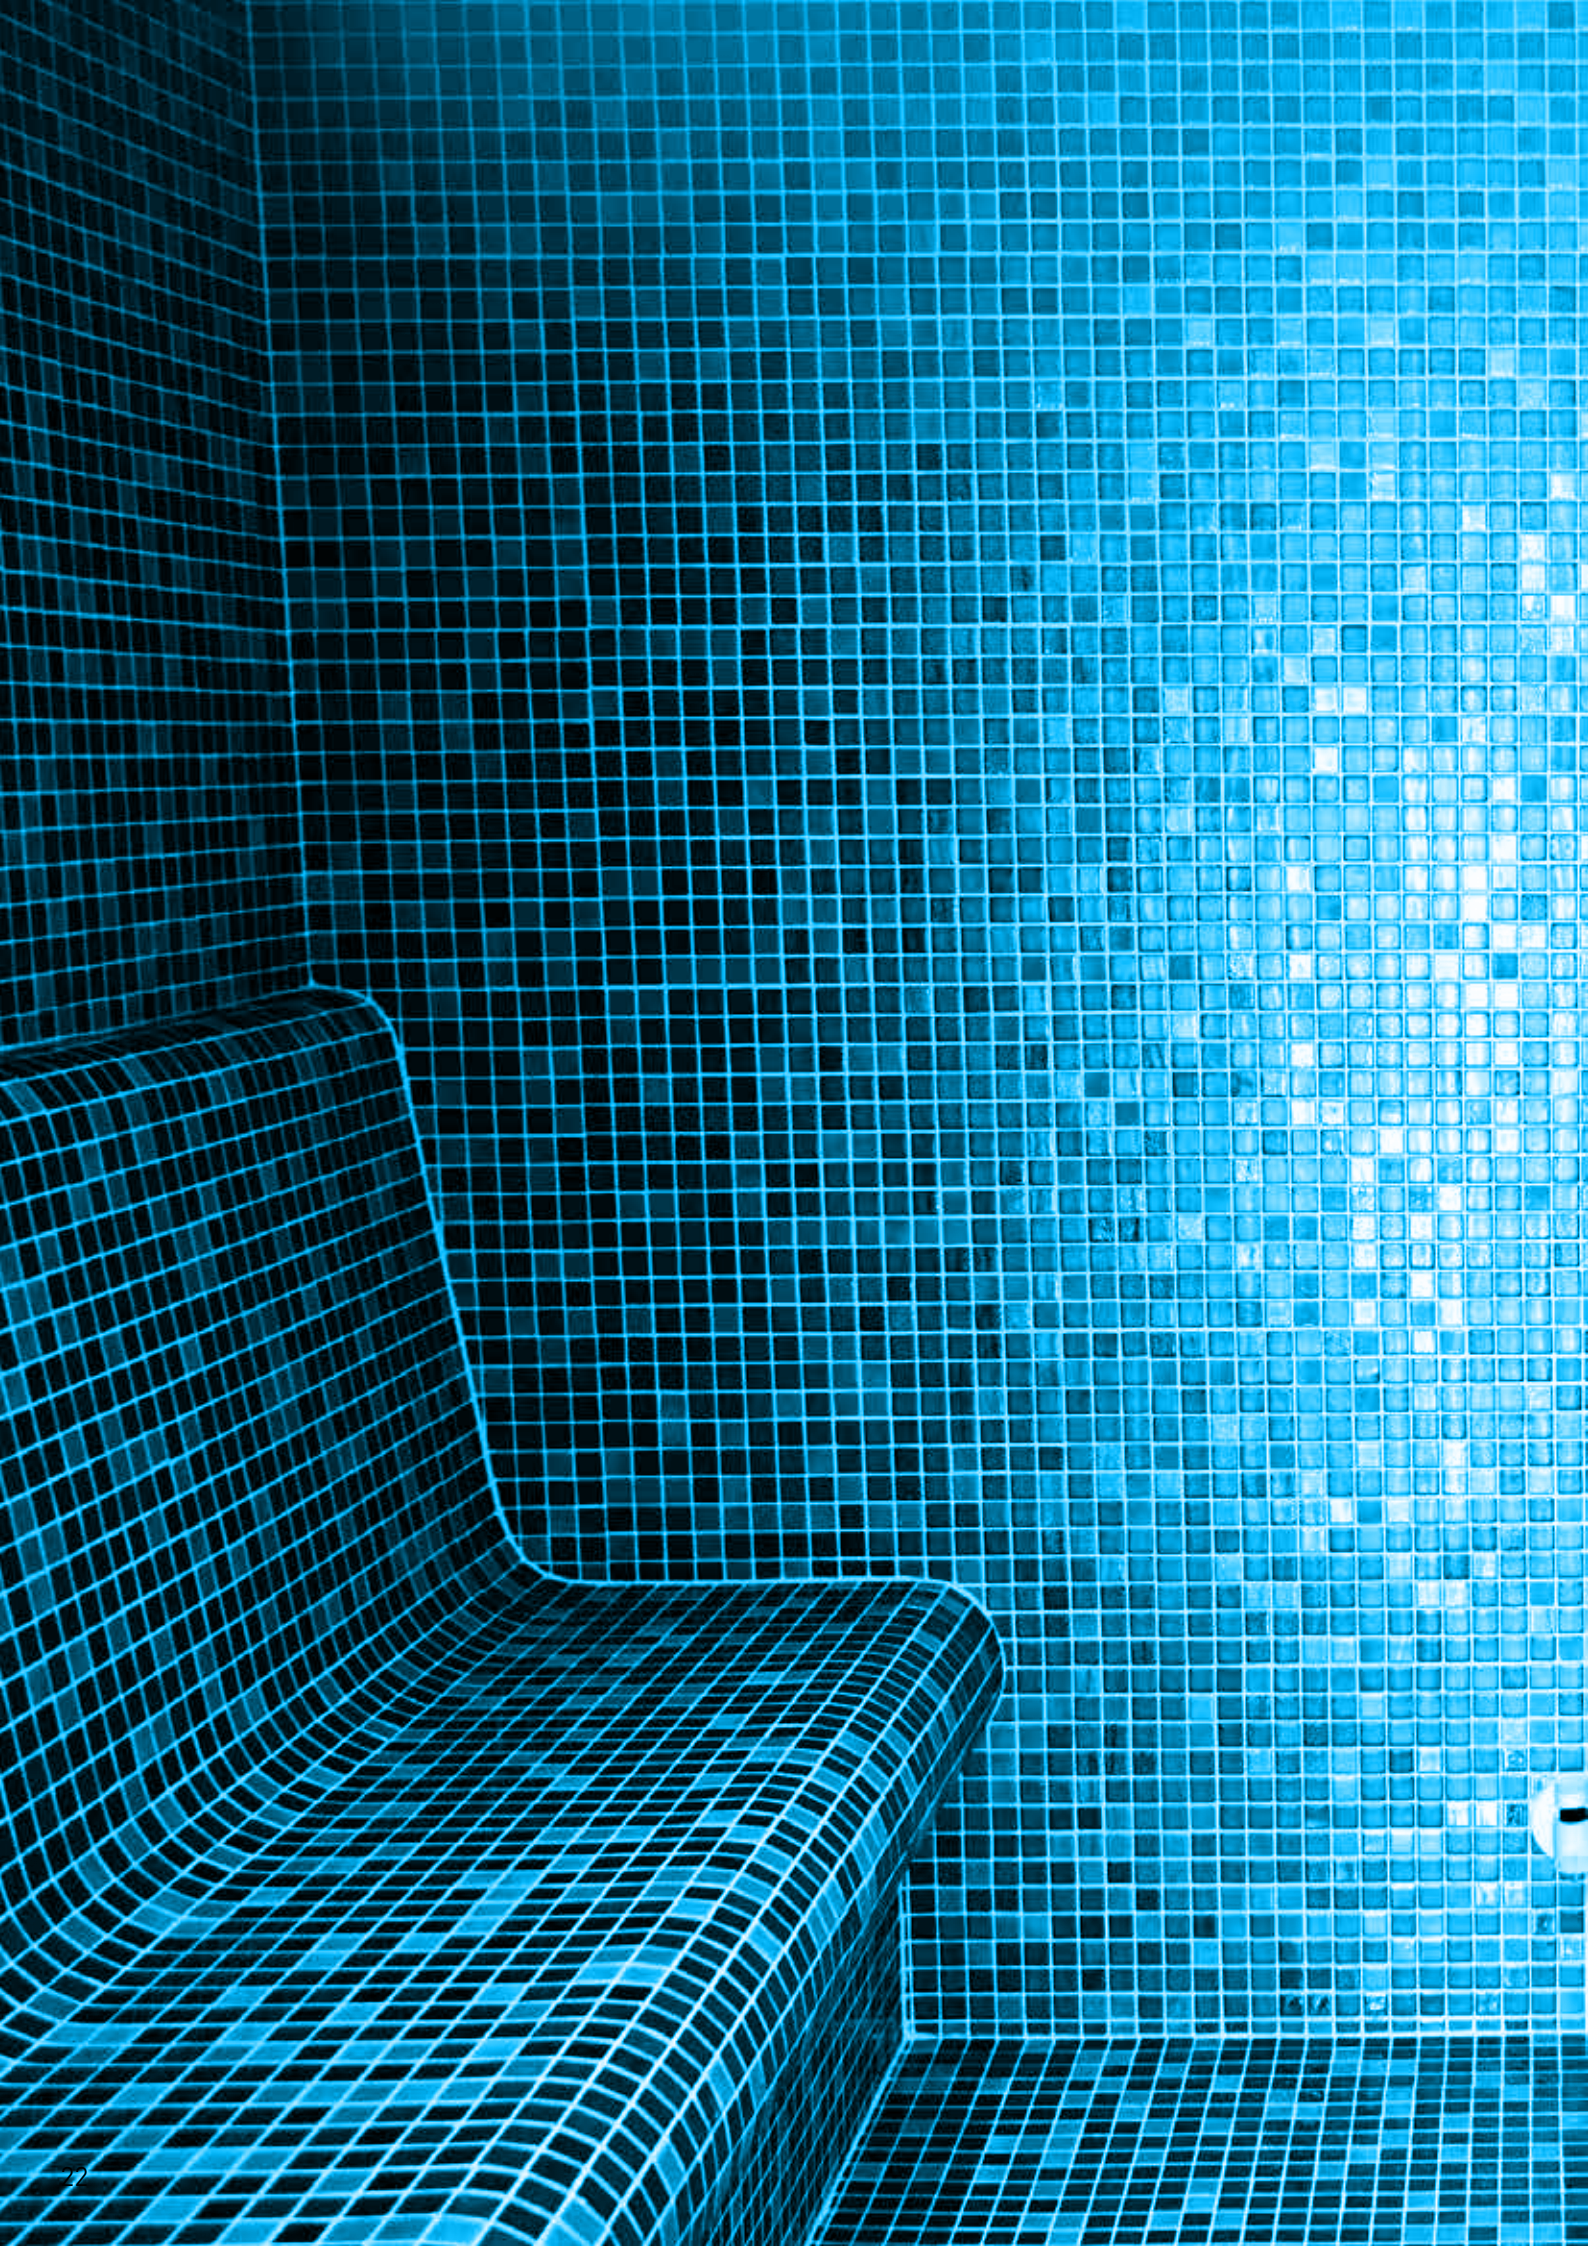

TAILORED VAPOUR BARRIER
PRODUCTS
ARCHI 3D PLANS
THREE TYPES OF BENCHES
ALL TYPES OF ROOFS

READY TO TILE
**BESPOKE
HAMMAMS**

**HAMMAMS /
WELLNESS SHOWERS**

**Trust us with your project...
We will provide you with a
hammam according to your wishes**






EXAMPLE OF PLAN

Custom-made plans by an architect

READY TO TILE

HAMMAM SOLUTIONS

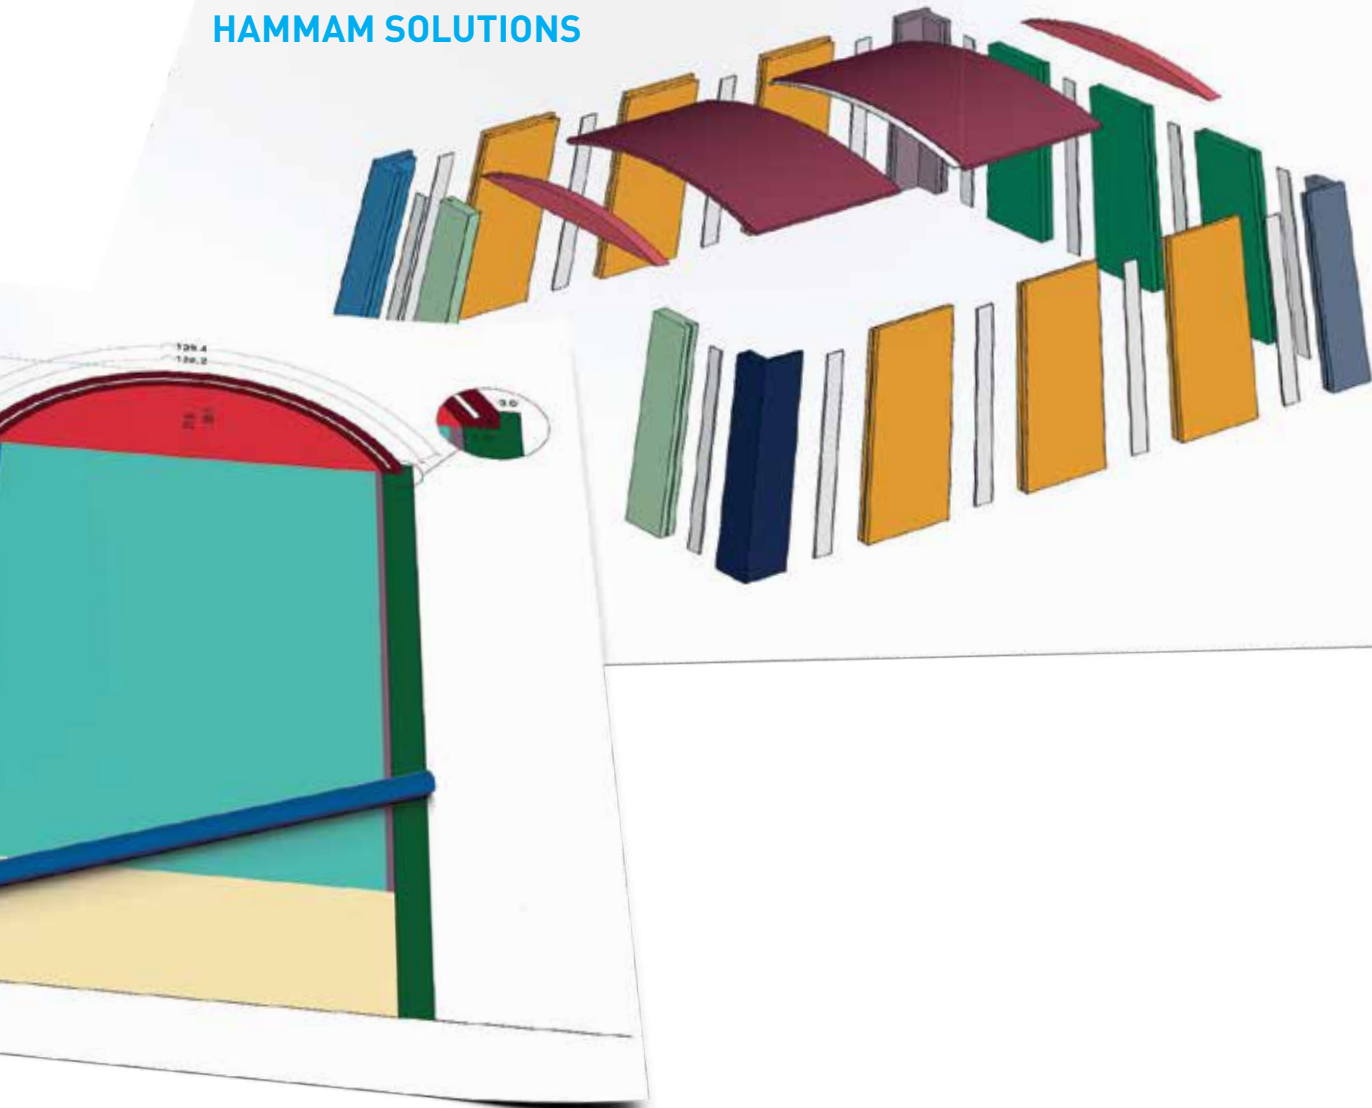

BESPOKE HAMMAMS


In order to meet the growing demand for comfort required for professional or domestic hammams, we offer a tailor-made hammam concept that will suit everyone's desires, along three axes:

- Product quality with the new Epoxy board finish and vapour barrier options.
- All types of benches, all types of roofs, all types of tileable shower trays
- Custom plans with 3D views to propose the concept to your customers and facilitate installation for installers.
- The whole range of accessories required for hammams:
 - Door
 - Generator
 - Lighting or Starry Sky
 - Aromatherapy
 - Fan
 - ...


BENCHES

We offer three types of benches:
a square bench seat for cubic shapes and architecture,
a standard rounded bench seat without backrest and a
rounded bench seat with backrest for more comfort.


All our benches are made to the nearest centimeter and
can also be cut on site if necessary. The benches are all
equipped with a recess in the lower part for the passage of
cables and pipes.

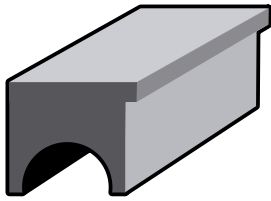

SQUARE

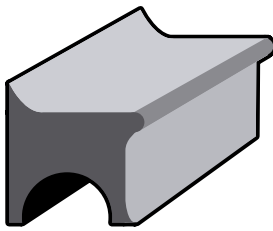


REGULAR

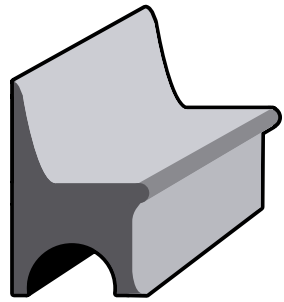

CHAIR


REF	LENGTH	TOTAL WIDTH (MM)	ENCROACHMENT WIDTH (MM)	TOTAL HEIGHT (MM)	SEAT HEIGHT (MM)	SLOPE
SQUARE		500	450	500	-	
REGULAR	To Measure	511	425	475	410	1%
CHAIR		561	430	890	440	




BESPOKE BENCHES
CAN BE MADE

ROOFS


We offer all types of roofs, pre-assembled, stiffened, ready-to-install:
Flat roof, pitched roof, tunnel roof, dome roof...

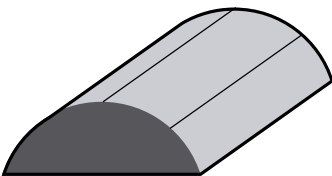

VAULT - TUNNEL

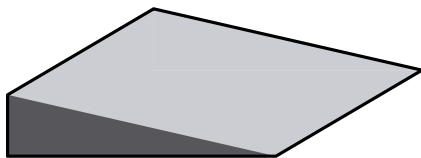


MONO-SLOPE

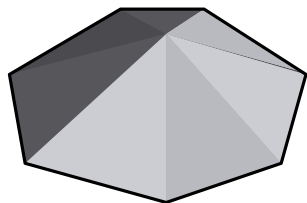

DOME


WALLS AND PLANS

We adapt the panels in width and height to provide you with a tailor-made
hammam. All our panels are tongue and grooved to offer a better structural
integrity. We offer vapour barrier finishes on request.

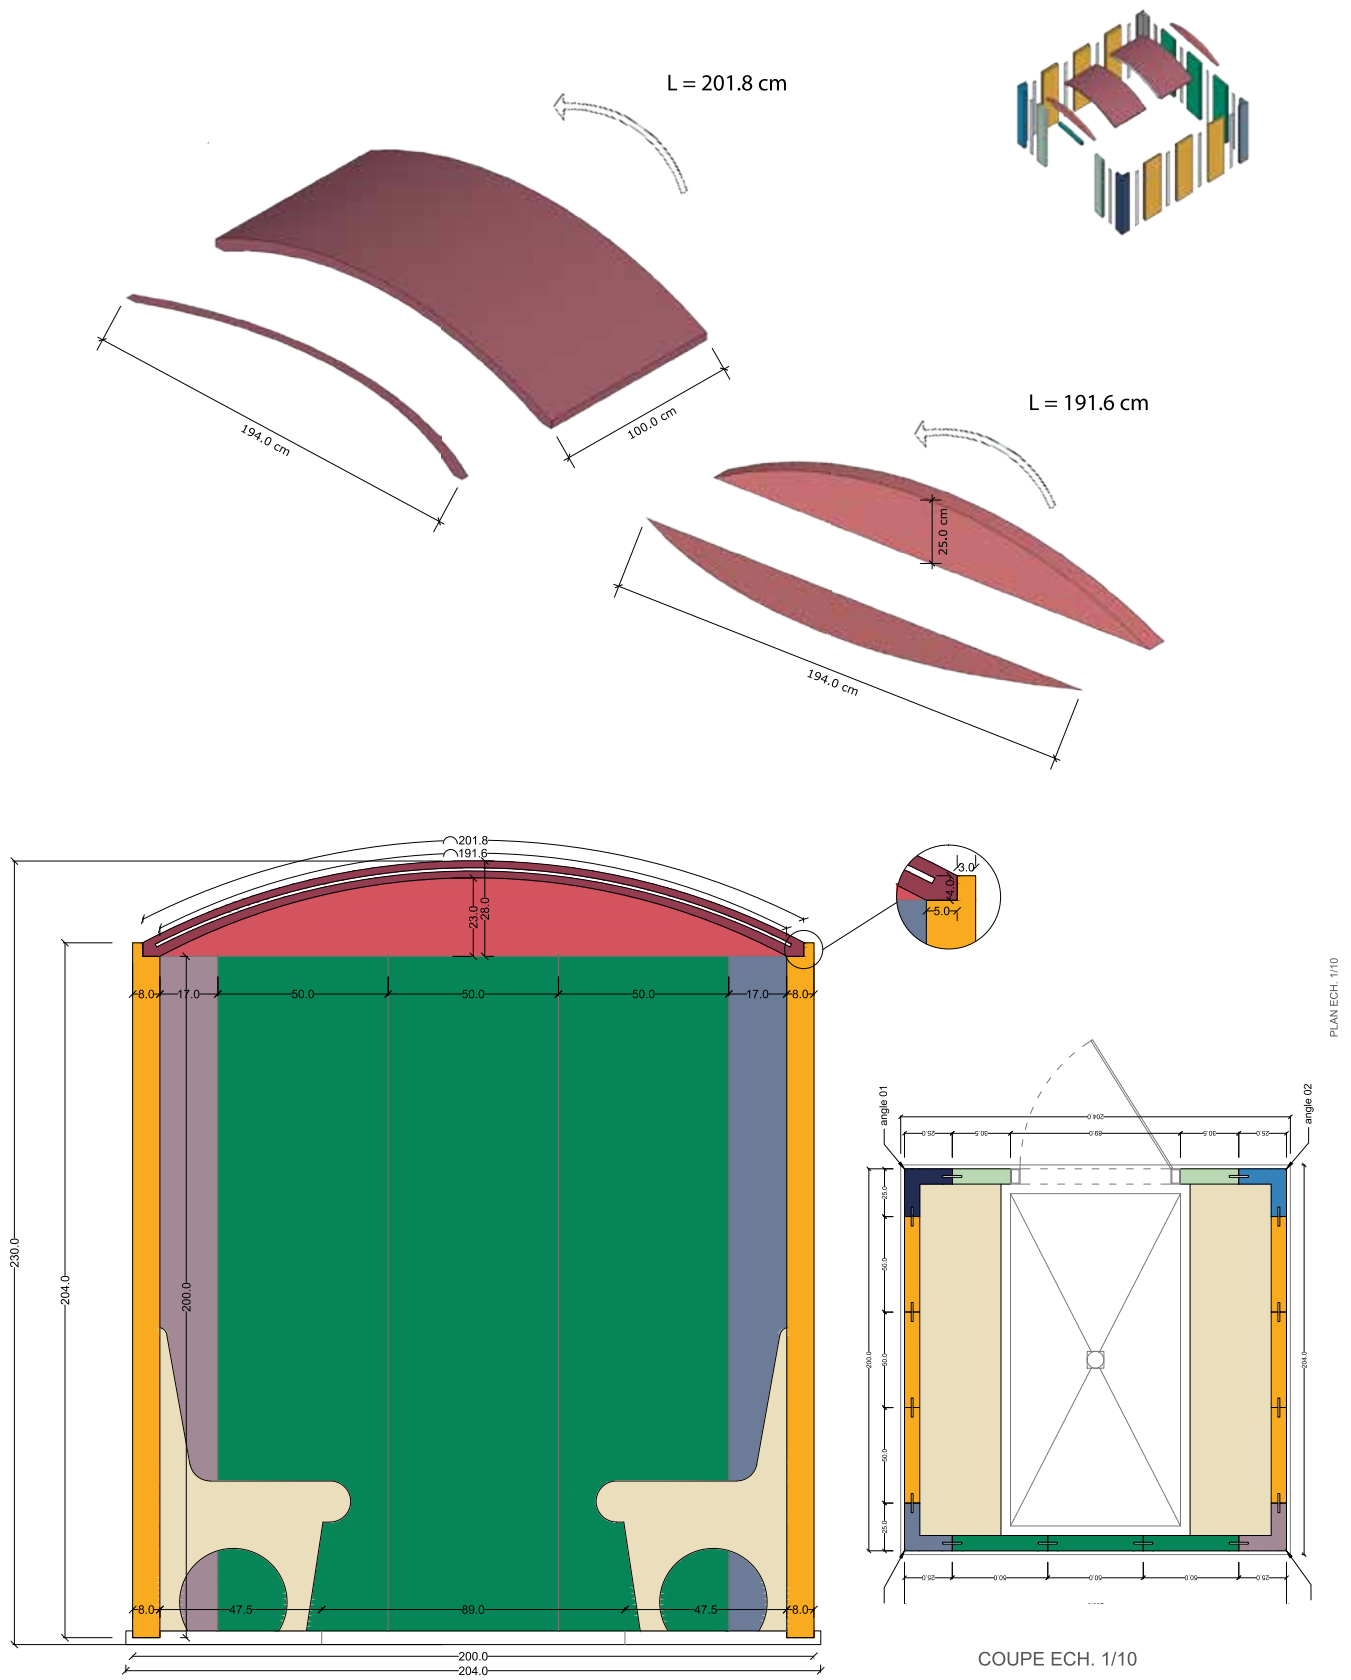

EXAMPLE OF PLAN
Custom-made plans by an architect



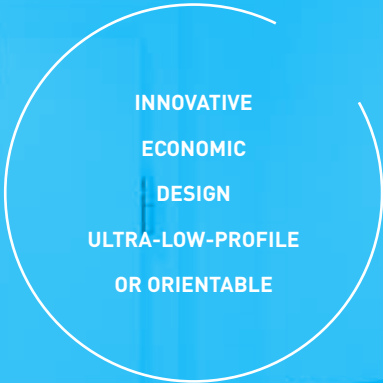

INNOVATIVE
ECONOMIC
DESIGN
ULTRA-LOW-PROFILE
OR ORIENTABLE

FLOOR DRAIN SOLUTIONS

The traditional solutions used to make walk-in showers are often used without sealing accessories, for reasons of savings and speed of installation. In order to meet this double requirement, we offer an economical and easy-to-install and waterproof product. Our company offers you a complete range of channels and two floor drain systems that will meet the requirements of professionals and bring you security in the installation and life of your walk-in shower

These systems are offered to you with an integrated waterproof mat which will allow you to ensure waterproofing quickly, and thus guarantee your site. The traps are all available in diameter 40 (adhesive or screwable). The traps all also provide a drainage system for infiltrated water under tiles and a grid raising system to adapt to all tiles -





FLOOR DRAIN SOLUTIONS STANDARD OUTLET




ORIENTABLE TRAP
HORIZONTAL / VERTICAL



WATERPROOF MAT


ADJUSTABLE FRAME
ACCORDING TO TILE
THICKNESS

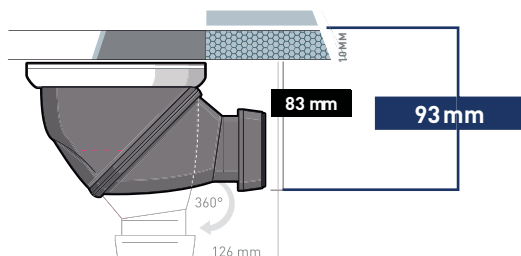

INNOVATION
ORIENTABLE TRAP
WATERPROOFING
SYSTEM
GRID HEIGHT
ADJUSTMENT

JAMES FLOOR DRAIN

A walk-in floor drain, with an integrated waterproof mat, utilizing a 360° orientable trap which enables connection in all directions (vertical, horizontal, intermediary).



STANDARD GRID
PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS

SQUARE GRID 2



ROUND GRID




DIAGONAL GRID

REF	DESCRIPTION	UNDERLAY SIZE (MM)	GRID WIDTH (MM)	GRID LENGTH (MM)	UNDERLAY THICKNESS (MM)
RC 20 ACIER	360° FLOOR DRAIN	200 X 200	115	115	10




FLOOR DRAIN SOLUTIONS STANDARD OUTLET

ORIENTABLE TRAP

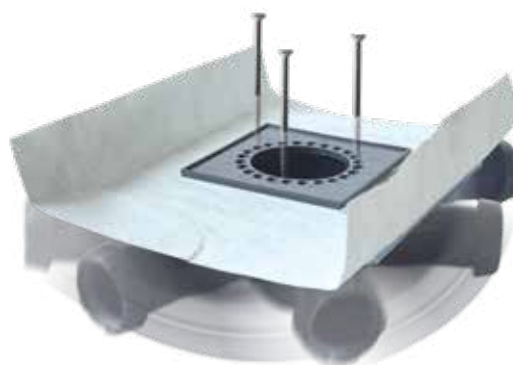

ADJUSTABLE FRAME
ACCORDING TO TILE
THICKNESS

WATERPROOF MAT

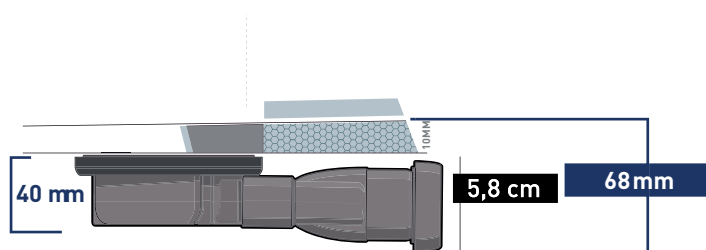

INNOVATION
SLIM TRAP
WATERPROOFING
SYSTEM
GRID HEIGHT
ADJUSTMENT

SLIM FLOOR DRAIN

A walk-in floor drain, with an integrated waterproof mat, utilizing an Ultra-Low-Profile trap with a maximum displacement of 6.8 cm




STANDARD GRID
PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS

SQUARE GRID 2



ROUND GRID





DIAGONAL GRID

REF	DESCRIPTION	UNDERLAY SIZE (MM)	GRID WIDTH (MM)	GRID LENGTH (MM)	UNDERLAY THICKNESS (MM)
RC 20 SLIM	ULTRA-LOW-PROFILE FLOOR DRAIN	200 X 200	115	115	10



FLOOR DRAIN SOLUTIONS CHANNEL OUTLET

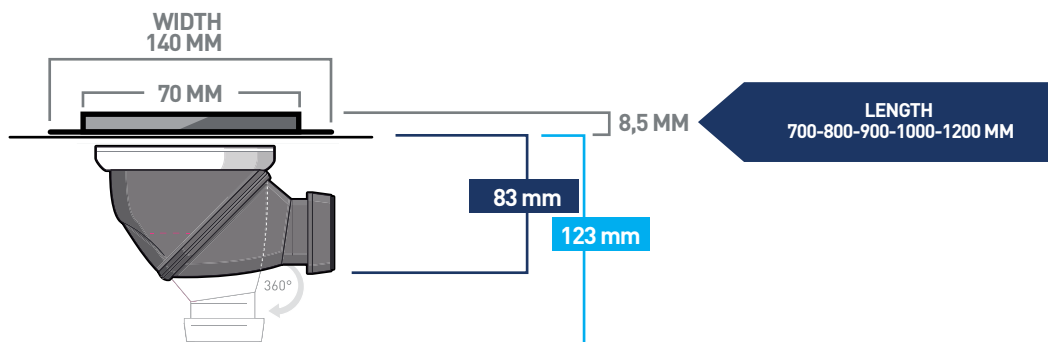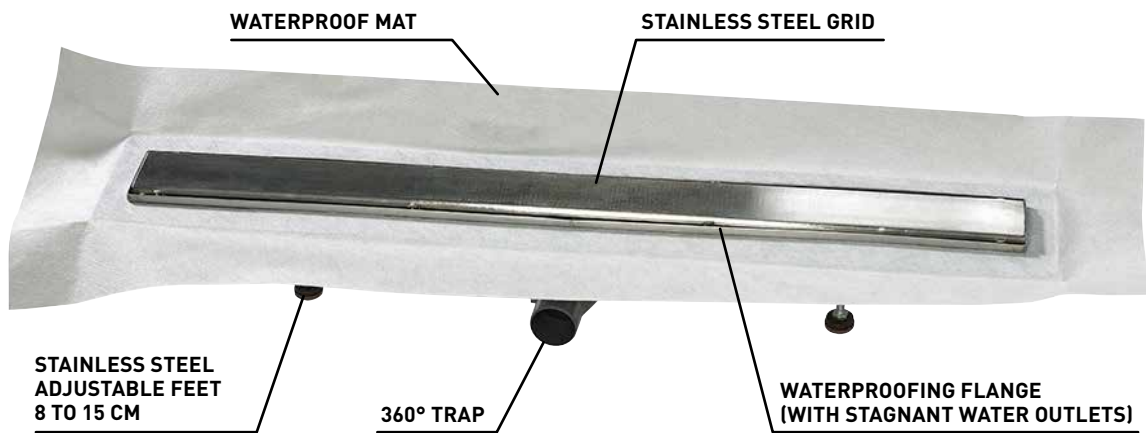

VERSOPRIMO SHOWER CHANNEL

We offer professionals a traditional range of walk-in solutions. The channels are manufactured entirely in Stainless Steel and enable the installation of a custom-made walk-in shower using a screed. Available in lengths from 70 to 120 cm, the channels will allow you to follow the trend of shower channels at a lower cost. All Channels are delivered with 4 adjustable feet, a waterproof flap to ensure the connection to the screed and are designed with a drainage system for lost water infiltrated under tiles. We offer with these channels the 360° Wirquin James trap which will allow you an easy connection with a significant flowrate.



REF	TOTAL LENGTH (MM)	GRID LENGTH (MM)	TOTAL WIDTH (MM)	GRID WIDTH (MM)	DISPLACEMENT UNDER CHANNEL - HORIZONTAL VERSION (MM)	DISPLACEMENT UNDER CHANNEL - VERTICAL VERSION (MM)
LD 70	750	700	140	70	83	123
LD 80	850	800				
LD 90	950	900				
LD 100	1050	1000				
LD 120	1250	1200				

Flow rate in Litres per minute > 40 Litres
Diameter of outlet - 40 mm
Type of outlet - Glue or Screwable
Height of Grid Frame - 8mm


**BESPOKE LENGTHS
AVAILABLE ON
REQUEST**

STANDARD GRID PROVIDED




FULL GRID (STANDARD)

OPTIONAL GRIDS




ROUND LINE GRID



SQUARE LINE GRID



FLOOR DRAIN SOLUTIONS CHANNEL OUTLET

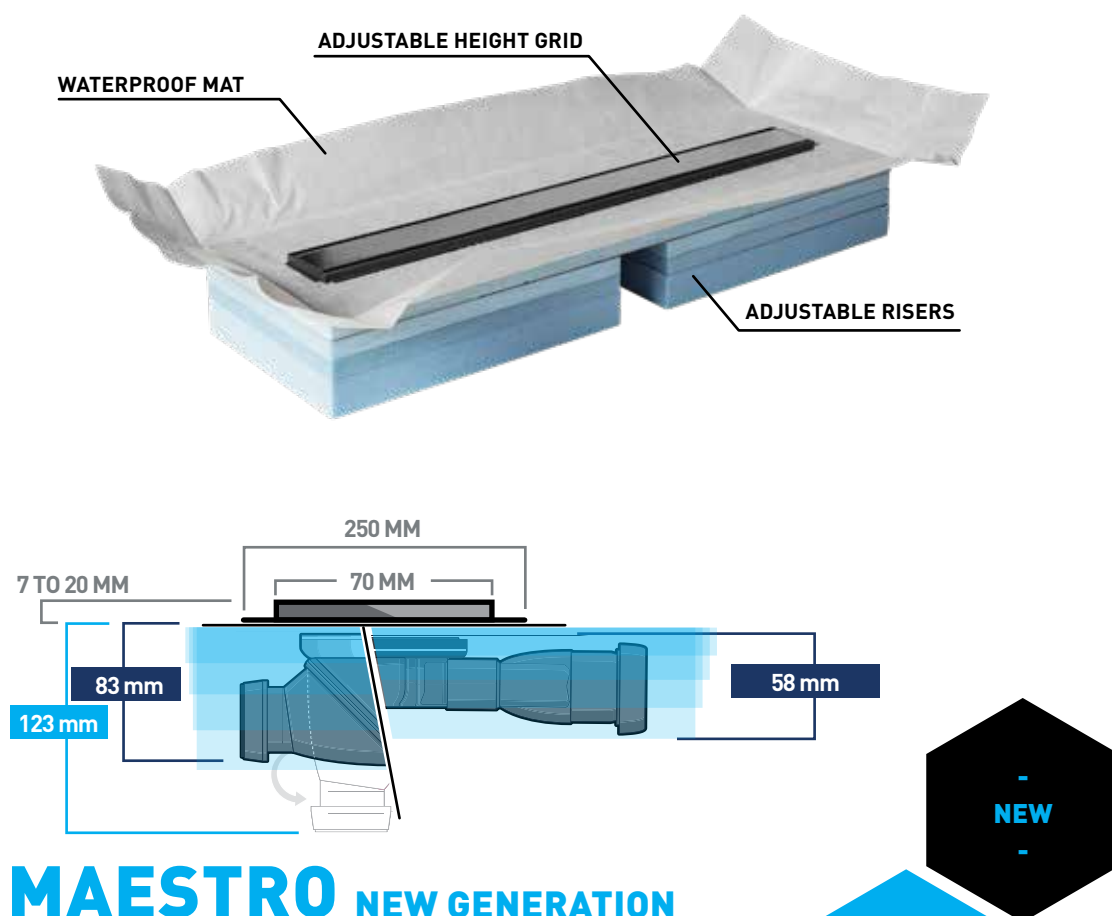


MAESTRO NEW GENERATION SHOWER CHANNEL

Discover our new system, largely inspired by the walk-in floor drain, that meets a long-term trend: Channels...

Designed with a mini-underlay on the principle of a shower tray, the channel is mounted on a waterproof mat, offered with a stainless-steel grid, but also compatible with colour grids or tileable grids. The grids are adjustable to the height of the tiling by a system of clips. The walk-in shower channel rests on polystyrene risers which will ensure stability over time and which are adjustable according to the desired height. The channel is available in two versions: JAMES trap with vertical / horizontal swivelling outlet or SLIM (ultra-low profile) which makes it one of the lowest profile channels on the market.


WATERPROOF
READY TO INSTALL
ULTRA-LOW PROFILE
STAINLESS GRID
HEIGHT ADJUSTABLE

STANDARD GRID PROVIDED




FULL GRID (STANDARD)

OPTIONAL GRIDS



ROUND LINE GRID



SQUARE LINE GRID



TILEABLE GRID

REF	DESCRIPTION	TOTAL LENGTH (MM)	GRID LENGTH (MM)	TOTAL WIDTH (MM)	GRID WIDTH (MM)	DISPLACEMENT UNDER CHANNEL (MM)	WEIGHT (KG)	QUANTITY PER BOX
LD 70 JAMES	Floor Drain channel with 360° trap	750	700	250	70	83	3	1 Piece
LD 70 SLIM	Floor Drain channel with slim ultra-low-profile trap	750	700	250	70	45	3	1 Piece



HYGIENIC
ECONOMIC
ACCESSIBLE TO EVERYONE
EASY TO INSTALL
CUSTOMIZABLE
AESTHETIC

TILEABLE SHOWER TRAY

SOLUTIONS





HYGIENIC
-
ECONOMIC
-
ACCESSIBLE TO EVERYONE
-
EASY TO INSTALL
-
CUSTOMIZABLE
-
AESTHETIC

ENHANCED
MECHANICAL
RESISTANCE



Guaranteed
Piercing
Resistance

CAN BE CUT



READY TO TILE


TILEABLE SHOWER TRAY SOLUTIONS

Our company provides you with a range full of innovations and professional products for making a long-lasting walk-in shower.

Designed with materials similar to tileable panels, our shower trays are made of an alloy of extruded polystyrene foam and reinforced on each side of the shower tray with fiberglass mesh and a layer of polymerized cement mortar. Our shower trays are then equipped with an integrated waterproof mat that protrudes 10 cm on each side to offer an economical and secure installation.


The different types of tileable shower trays:

SQUARE GRID SOLUTIONS

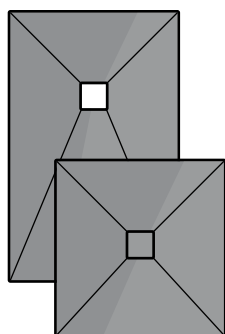


FLATBOARD
SLIMBOARD
COMPACT BOARD
FORMAT : SQUARE OR RECTANGULAR

CHANNEL SOLUTIONS

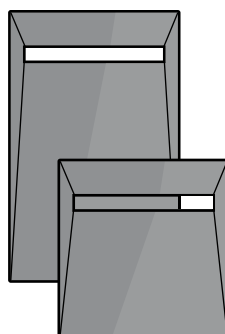


LINEBOARD
COMPACT LINE BOARD
FORMAT : SQUARE OR RECTANGULAR

MONOSLOPE CHANNEL SOLUTIONS

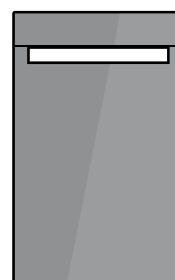

MONOBOARD
FORMAT : RECTANGULAR

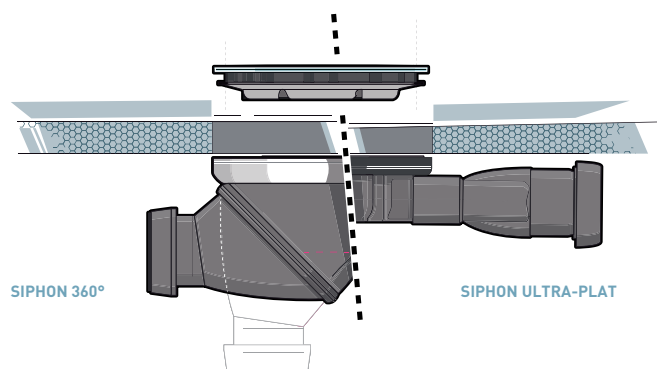

DESCRIPTION	TEST	RESULT
Compressive Force	(ASTM C579)	0.5 N/mm ²
Fire Characteristics	EN 13501-1	CLASS E
Density		36 ± 0.02 kg/m ³
Grip	BS EN 1384	0.3 N/mm ²
Water absorption in immersion	DIN 53428	0.02% byVol
Water absorption (capillary)	DIN 53428	NIL


Water Seal	50mm in accordance with EN274 Standard
	83mm (Horizontal Outlet) - James
Displacement under Tray	123mm (Vertical Outlet) - James
	58mm - Slim
Flowrate	Approx 40 Litres per minute
Outlet Diameter	40mm
Grid Size	115 x 115mm
Channel Size	700mm

Technical features of standard trays

WATERPROOF MAT


INNOVATION

The trays are equipped with a waterproof mat that is crimped onto the waste and bonded to the tray. The mat provides integration to the walls and creates a peripheral seal, ensuring a watertight installation

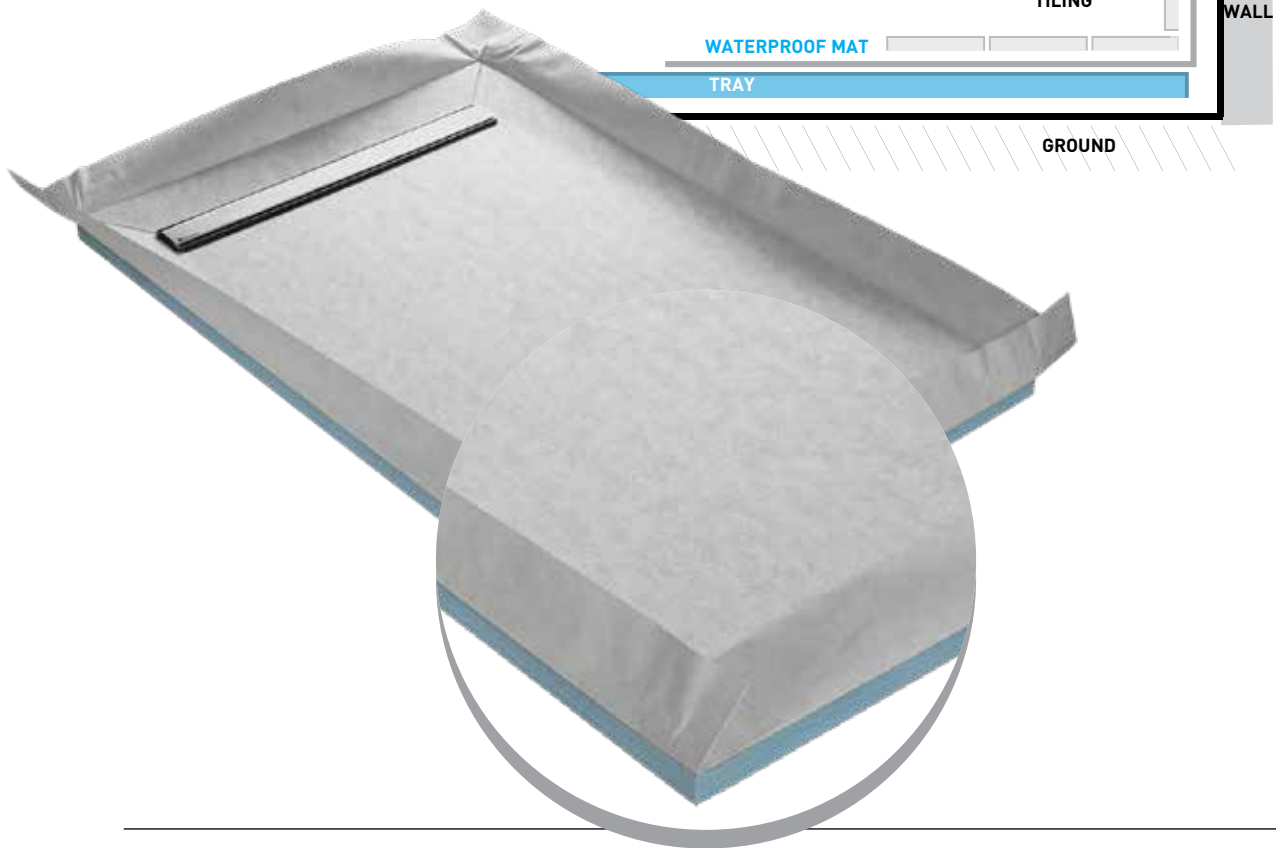


PERFORATION RESISTANCE

The mortar and fibre reinforce the surface under the mat to provide a very high perforation resistance by distributing the weight over a larger surface. This guarantees the installation of mosaics as well as the resistance of the product during the tiling installation

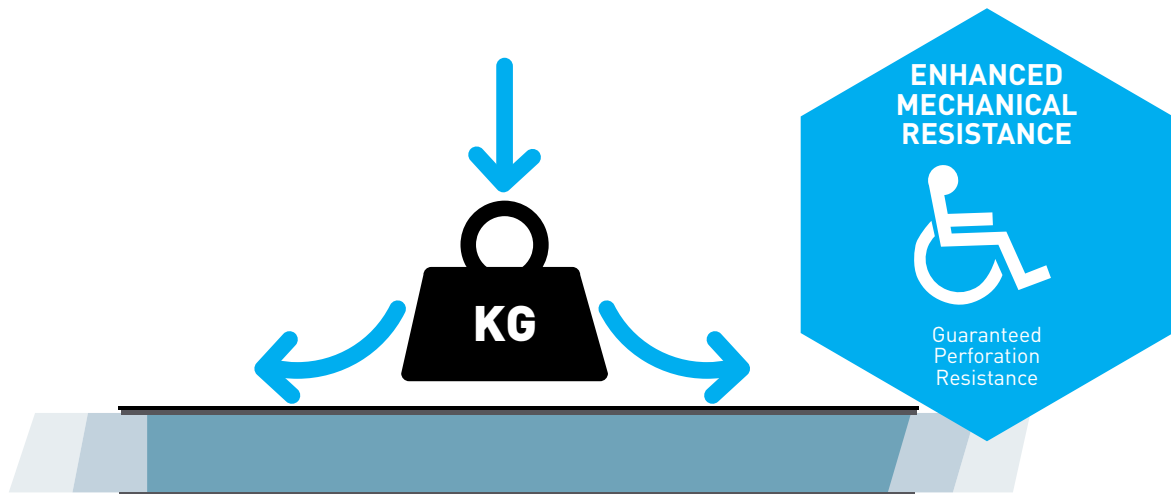


OUTLETS TWO PRODUCTS TO CHOOSE FROM

The traps are all available in 40mm diameter (glue or screwable). The traps also all provide a drainage system for infiltrated water under tiles and a grid raising system to adapt to all tiles. 360 ° or ultra-low profile, the assurance of finding the ideal trap for your site constraints.

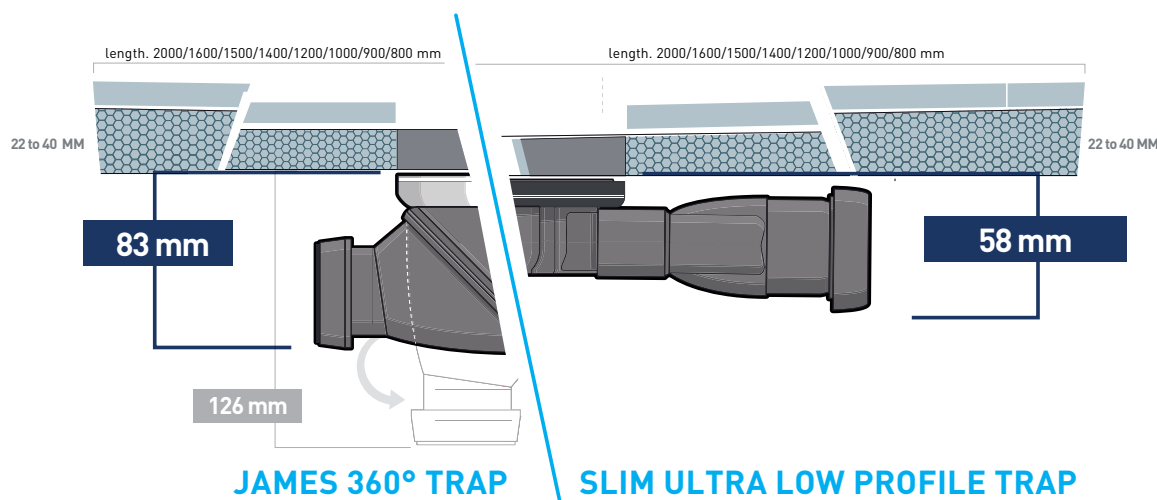


OUR RANGE OF ACCESSORIES

FOR THE INSTALLATION OF CONSTRUCTION PANELS



WATERPROOF TAPE

Waterproof tape 10 m x 12.5 cm, used to seal the joints between the shower tray and the walls, or between the walls. This strip is equipped with an elastomer layer and a polyester mesh layer to allow a good joint and a perfect seal. Available in rolls of 50 m. REF. ACC002



WATERPROOF CORNERS

Available in regular or inverted formats, the sealing corners provide waterproofing in addition to the strips or mats, in the most difficult to seal corners. REF. ACC003



POLYMERIZED WATERPROOF MORTAR

Polymerized waterproof adhesive mortar which ensures the bonding and sealing of the reinforcing strips and waterproof strips. Delivered in a 5 kg bag - Available in larger packaging. REF. ACC008




UNIVERSAL SHOWER TRAY RISER


Universal 200 x 120 cm hybrid riser (5+3 cm). Designed with a sheet in 5cm and one in 3cm, this riser will adapt to all sizes of shower trays and all depths of traps. REF. ACC016

GRIDS


STANDARD OUTLET




This year's square grid and timeless design is available in stainless steel as well as in trendy colours such as matt black, white or slate grey. Breaking with the traditional stainless-steel finish, these colours will fit elegantly into your bathroom and blend with all the tiles. Also available in colour on The Diagonal, Square 2 and Round models.

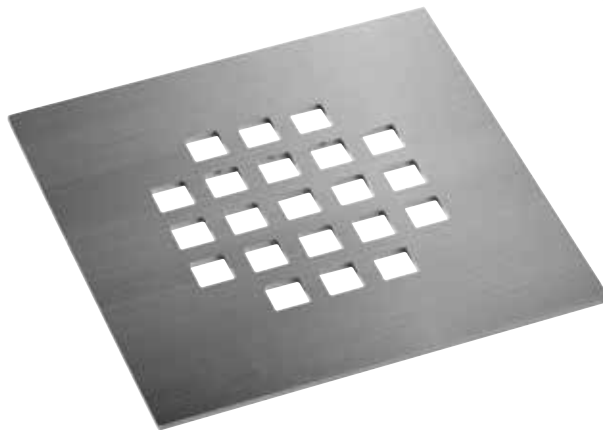


STAINLESS STEEL GRID
(DELIVERED STANDARD WITH OUR PRODUCTS)

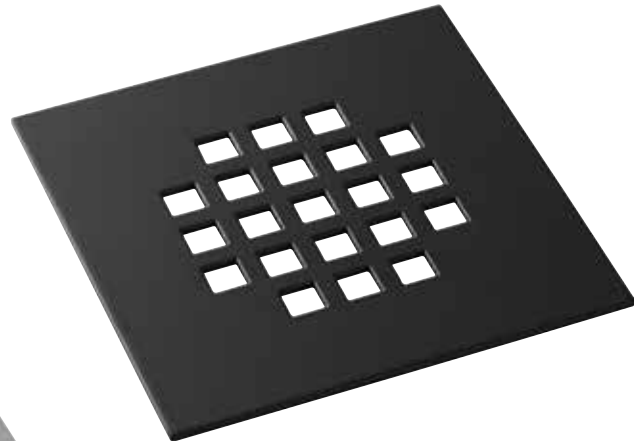

MATT BLACK GRID RAL 9005

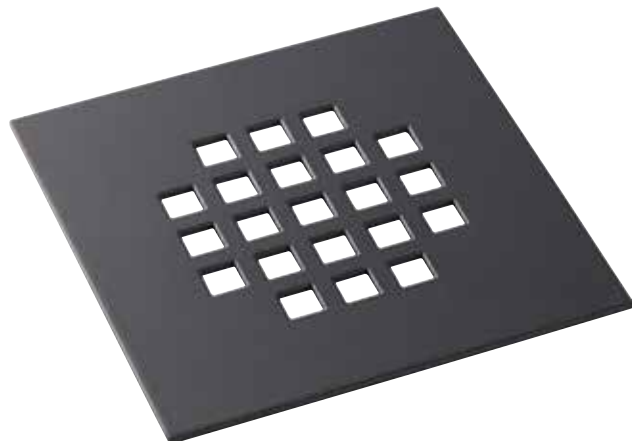

SLATE GREY GRID RAL 7015

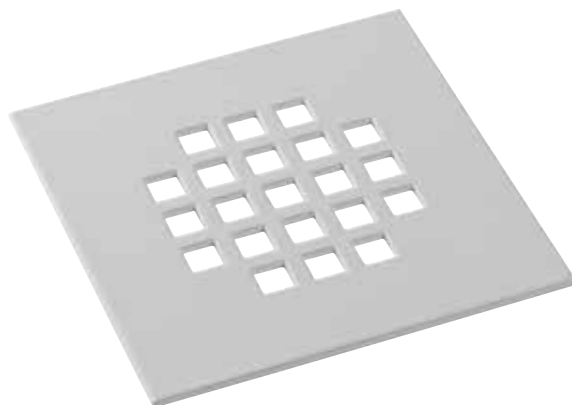

WHITE GRID RAL 9010



STANDARD GRID PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS

SQUARE GRID 2




ROUND GRID




DIAGONAL GRID

GRIDS

CHANNEL OUTLET




Like the square grids, our models of channel grids are offered to you this year in trendy colours to enhance the range and meet all finishing requirements.

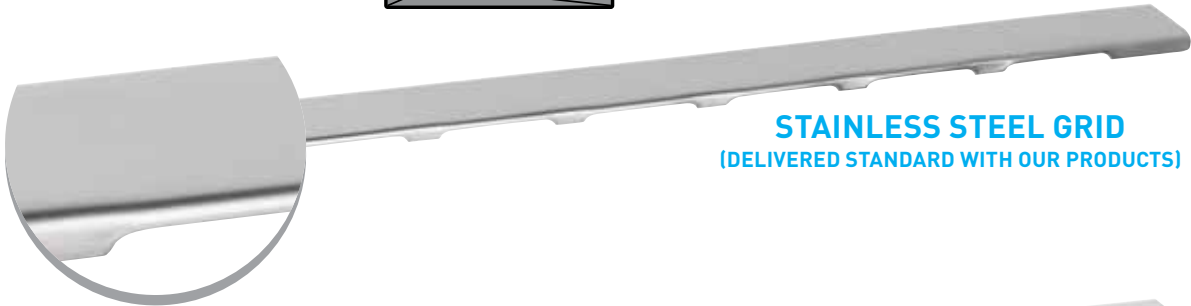


STAINLESS STEEL GRID
(DELIVERED STANDARD WITH OUR PRODUCTS)



WHITE GRID RAL 9010

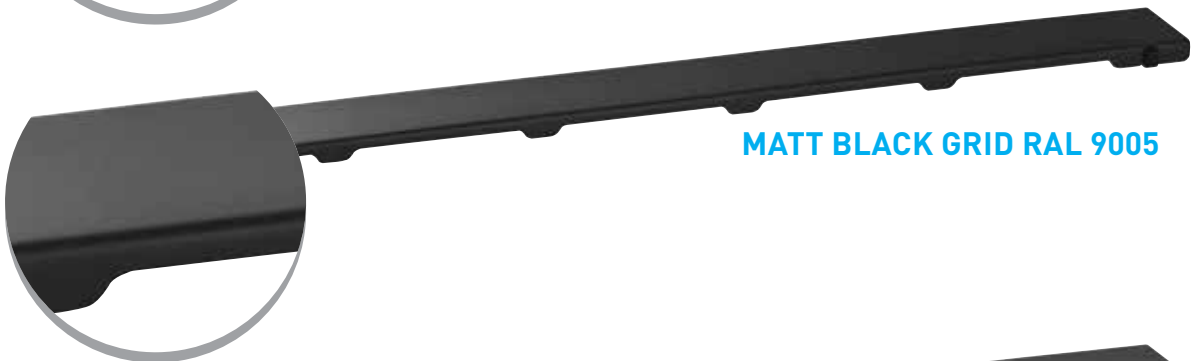

MATT BLACK GRID RAL 9005

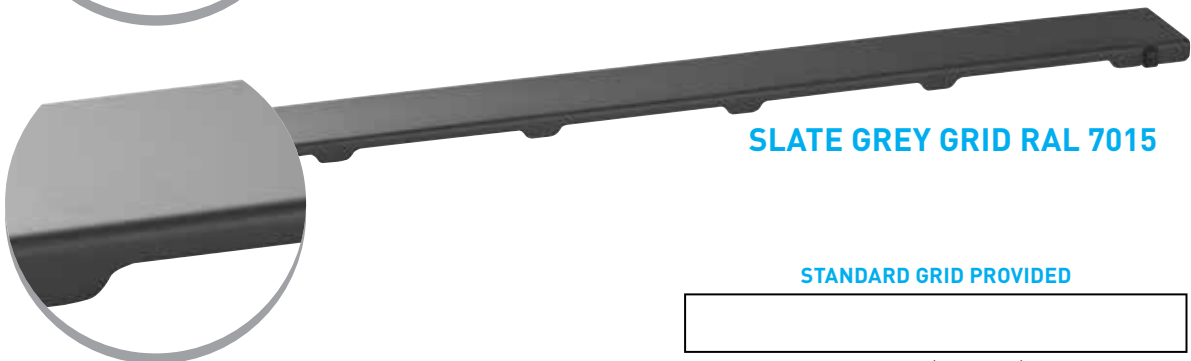


SLATE GREY GRID RAL 7015

STANDARD GRID PROVIDED




FULL GRID (STANDARD)


OPTIONAL GRIDS



ROUND LINE GRID




SQUARE LINE GRID



TILEABLE GRID




TILEABLE SHOWER TRAY SOLUTIONS STANDARD OUTLET

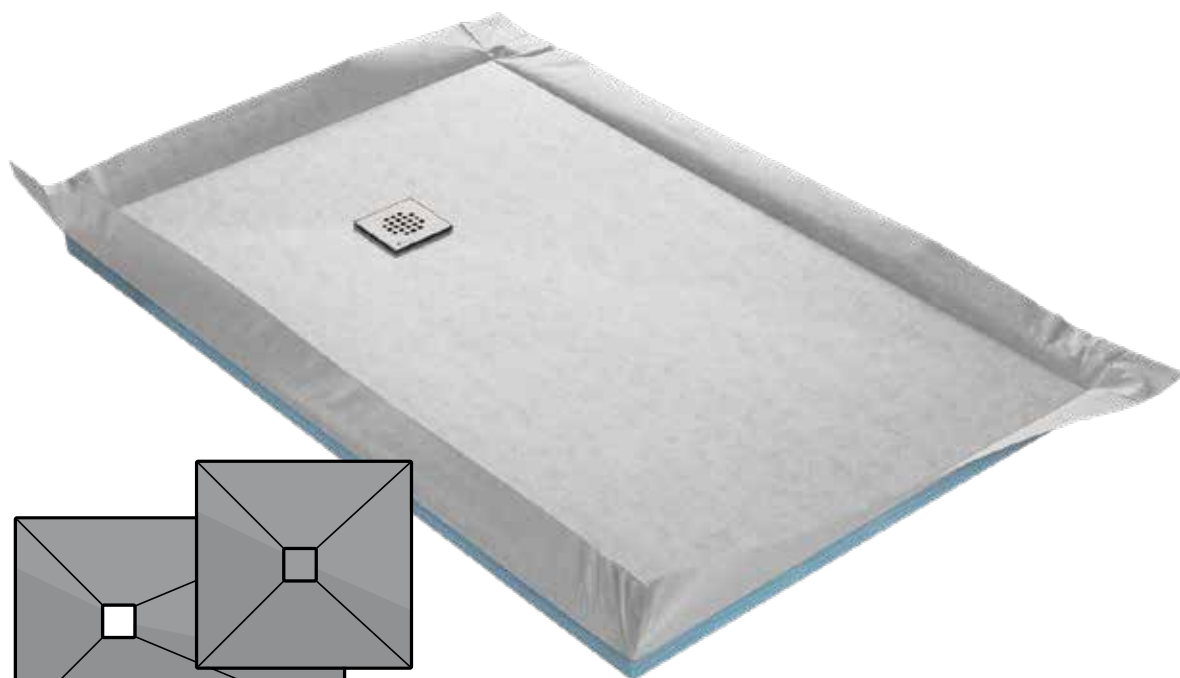

FLATBOARD

TILEABLE SHOWER TRAY

Standard tileable tray with 360 ° or ultra-low-profile trap and pre-assembled waterproof mat

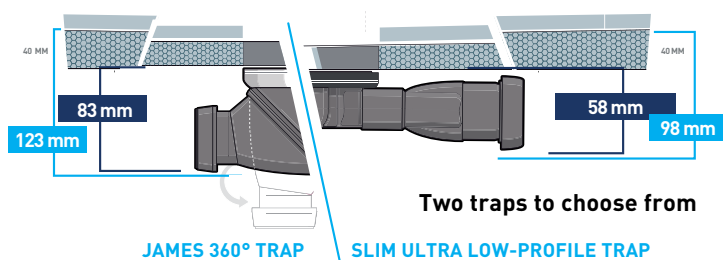

Two traps to choose from

JAMES 360° TRAP

SLIM ULTRA LOW-PROFILE TRAP

LIGHT
EXTRA LOW PROFILE
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES
360° WASTE

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	POSITION OF TRAP
RC 80 FLAT	TILEABLE SHOWER TRAY 800X800	CENTRE	800	800	40	400/400
RC 90 FLAT	TILEABLE SHOWER TRAY 900X900		900	900	40	450/450
RC 100 FLAT	TILEABLE SHOWER TRAY 1000X1000		1000	1000	40	500/500
RC 120 FLAT	TILEABLE SHOWER TRAY 1200X1200		1200	1200	40	600/600
RC 150 FLAT	TILEABLE SHOWER TRAY 1500X1500		1500	1500	40	750/750
RC 12090 CENTRE	TILEABLE SHOWER TRAY 1200X900		1200	900	40	450/600
RC 18590 CENTRE	TILEABLE SHOWER TRAY 1850X900		1850	900	40	450/925
RC 12090 FLAT	TILEABLE SHOWER TRAY 1200X900	OFFSET BATH FORMAT	1200	900	40	450/320
RC 14090 FLAT	TILEABLE SHOWER TRAY 1400X900		1400	900	40	450/320
RC 16090 FLAT	TILEABLE SHOWER TRAY 1600X900		1600	900	40	450/320
RC 150100 FLAT	TILEABLE SHOWER TRAY 1500X1000		1500	1000	40	500/320
RC 18590 FLAT	TILEABLE SHOWER TRAY 1850X900		1850	900	40	450/320
RC 200100 FLAT	TILEABLE SHOWER TRAY 2000X1000		2000	1000	40	500/320



STANDARD GRID PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS


SQUARE GRID 2




ROUND GRID



DIAGONAL GRID




TILEABLE SHOWER TRAY SOLUTIONS STANDARD OUTLET

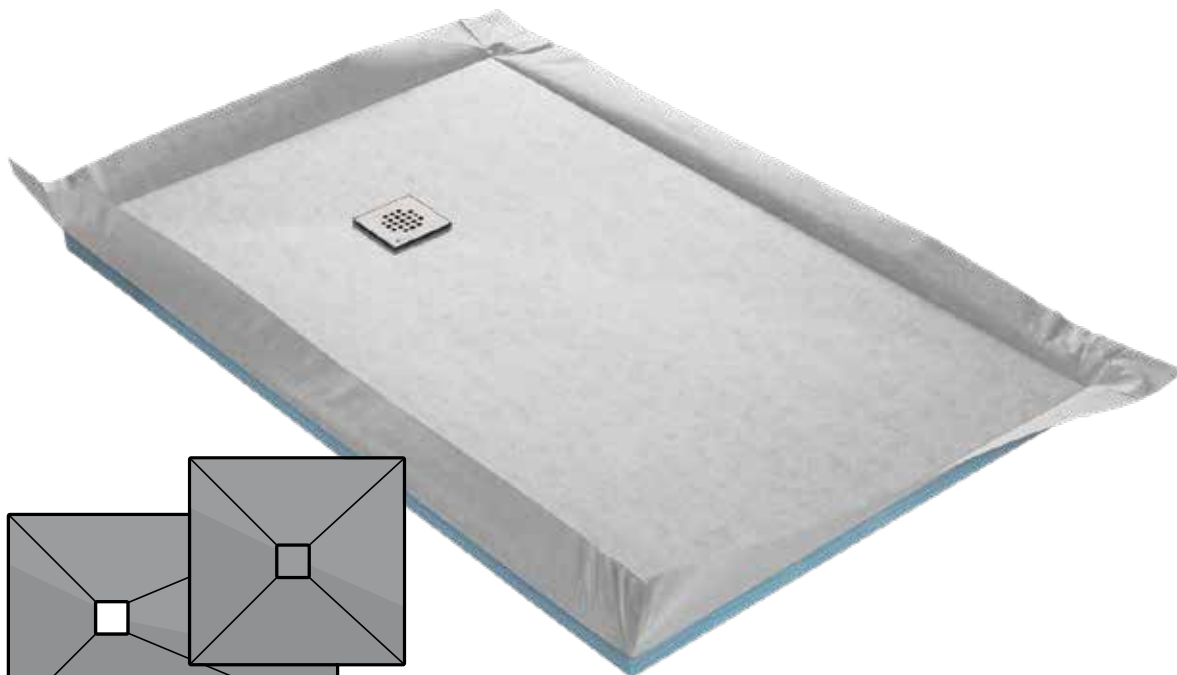

SLIMBOARD

TILEABLE SHOWER TRAY

22 mm ultra-low profile tileable tray with 40 mm ultra-low-profile trap and integrated waterproof mat.
Special space saving solution for renovations

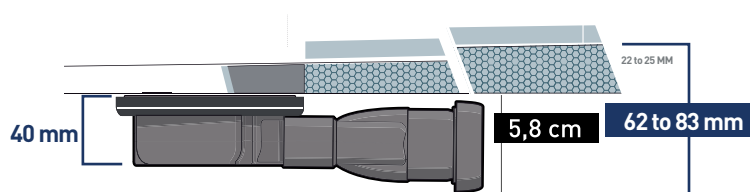

INNOVATION
ULTRA LOW-PROFILE
LIGHT
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES




STANDARD GRID
PROVIDED

SQUARE GRID (STANDARD)




OPTIONAL GRIDS

SQUARE GRID 2



ROUND GRID




DIAGONAL GRID

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	POSITION OF TRAP
RC 90 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 900X900	CENTRE	900	900	22	400/400
RC 100 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 1000X1000		1000	1000	22	450/450
RC 120 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 1200X1200		1200	1200	22	500/500
RC 12090 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 1200X900	OFFSET BATH FORMAT	1200	900	22	600/600
RC 150100 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 1500X1000		1500	1000	25	500/320
RC 18590 SLIM	TILEABLE SHOWER TRAY ULTRA-LOW-PROFILE 1850X900		1850	900	25	450/320




TILEABLE SHOWER TRAY SOLUTIONS STANDARD OUTLET

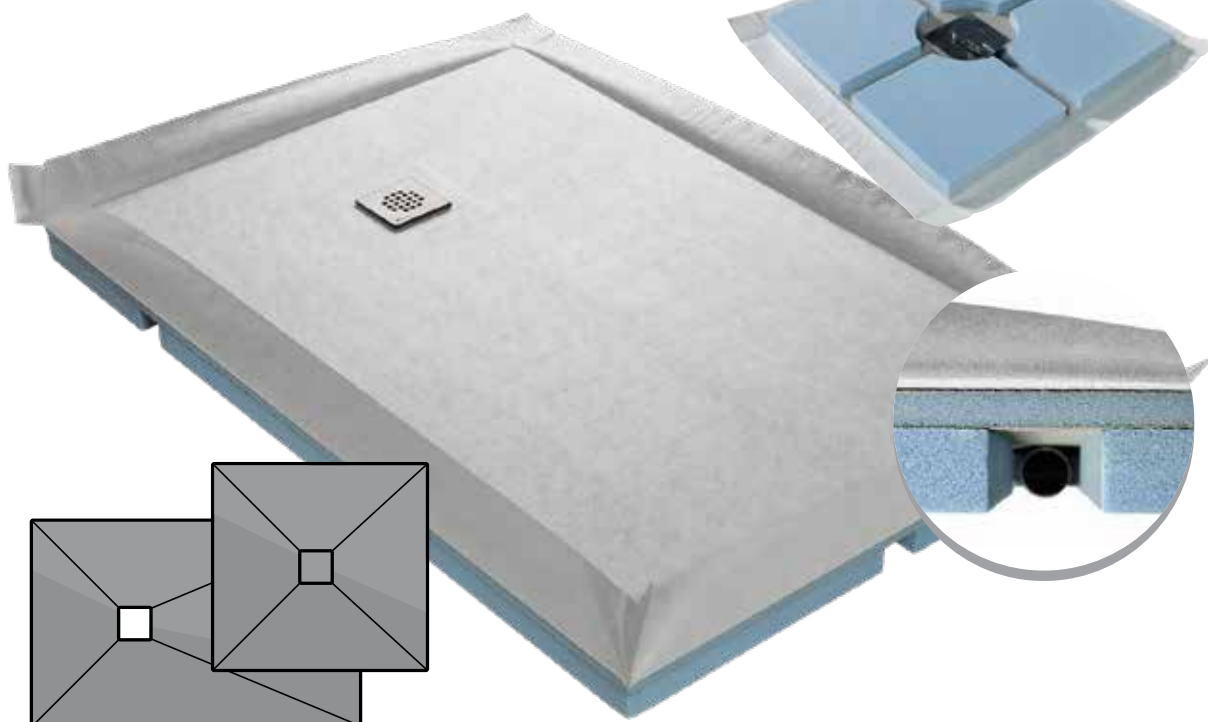

COMPACTBOARD

TILEABLE SHOWER TRAY

Standard tileable tray with ultra-low-profile trap, integrated riser and waterproof mat



-
NEW
-

INTEGRATED
WATERPROOF MAT
ULTRA LOW -PROFILE
2 CM SHOWER TRAY
INTEGRATED 4.5 CM
RISER THAT CAN BE CUT
ULTRA LOW-PROFILE
TRAP



STANDARD GRID
PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS

SQUARE GRID 2



ROUND GRID




DIAGONAL GRID

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	POSITION OF TRAP
RC 90 COMPACT	COMPACTBOARD ULTRA-LOW-PROFILE SHOWERTRAY 67 MM	SQUARE FORMAT CENTRE TRAP	900	900	67	400/400
RC 100 COMPACT			1000	1000	67	450/450
RC 120 COMPACT			1200	1200	67	500/500
RC 12090 COMPACT	COMPACTBOARD ULTRA-LOW-PROFILE SHOWERTRAY 70 MM	RECTANGULAR SHAPE OFFSET TRAP	1200	900	67	600/600
RC 150100 COMPACT			1500	1000	70	500/320
RC 18590 COMPACT			1850	900	70	450/320




TILEABLE SHOWER TRAY SOLUTIONS CHANNEL OUTLET

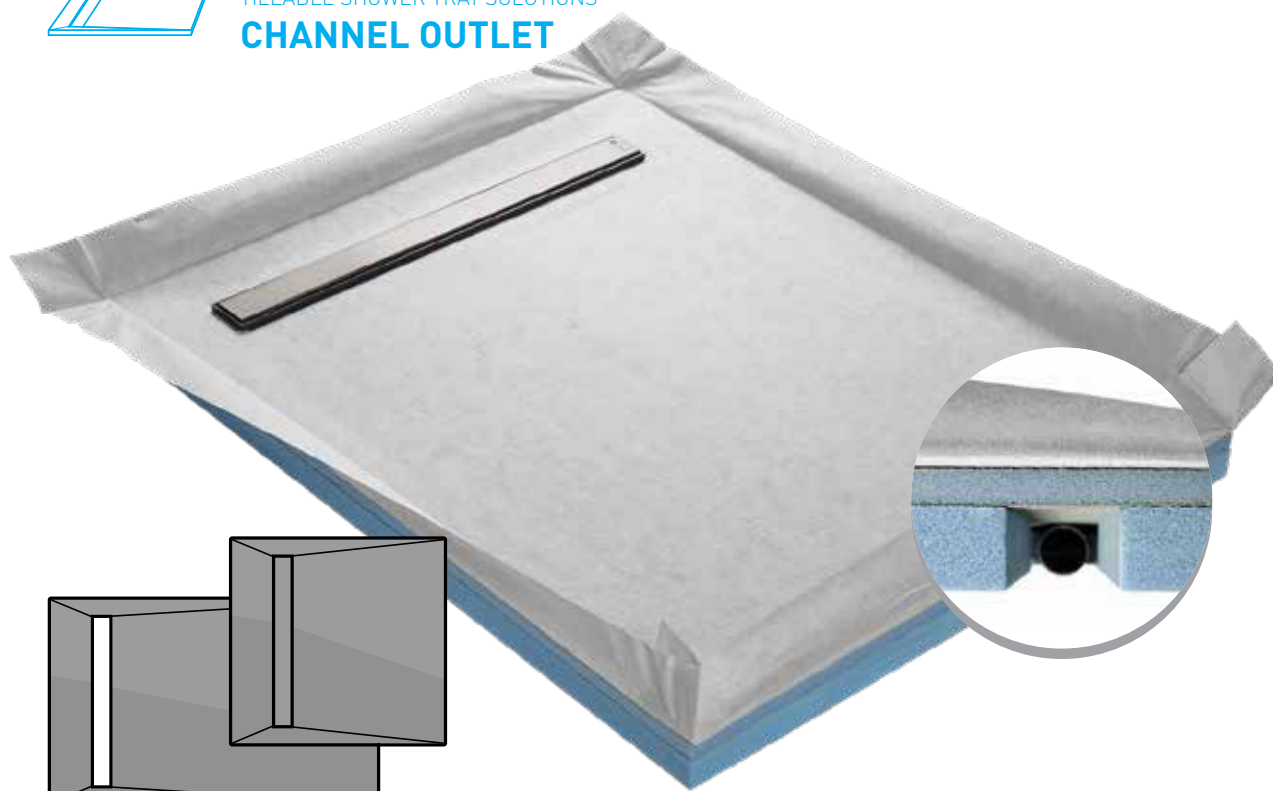

COMPACTBOARD LINE

TILEABLE SHOWER TRAY

Tileable shower tray with channel grid and ultra-low-profile trap and integrated waterproof mat. Special space saving solution for renovation following the Channel trend




-
NEW
-

INNOVATION
ULTRA LOW-PROFILE
LIGHT
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES


REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	DIS- PLACE- MENT (MM)	POSITION OF TRAP
RC 90 COMPACT - LINE	COMPACTLINE 900 X 900 CHANNEL SHOWERTRAY WITH INTEGRATED RISER	RECTANGULAR SHAPE OFFSET TRAP	900	900	67	450/135
RC 100 COMPACT - LINE	COMPACTLINE 1000 X 1000 CHANNEL SHOWERTRAY WITH INTEGRATED RISER		1000	1000	67	500/135
RC 120 COMPACT - LINE	COMPACTLINE 1200 X 1200 CHANNEL SHOWERTRAY WITH INTEGRATED RISER		1200	1200	67	600/135
RC 12090 COMPACT - LINE	COMPACTLINE 1200 X 900 CHANNEL SHOWERTRAY WITH INTEGRATED RISER		1200	900	67	450/135
RC 150100 COMPACT - LINE	COMPACTLINE 1500 X 1000 CHANNEL SHOWERTRAY WITH INTEGRATED RISER		1500	1000	70	500/135
RC 18590 COMPACT - LINE	COMPACTLINE 1850 X 900 CHANNEL SHOWERTRAY WITH INTEGRATED RISER		1850	900	70	450/135

STANDARD GRID PROVIDED



FULL GRID (STANDARD)


OPTIONAL GRIDS



ROUND LINE GRID




SQUARE LINE GRID



TILEABLE GRID



TILEABLE SHOWER TRAY SOLUTIONS CHANNEL OUTLET

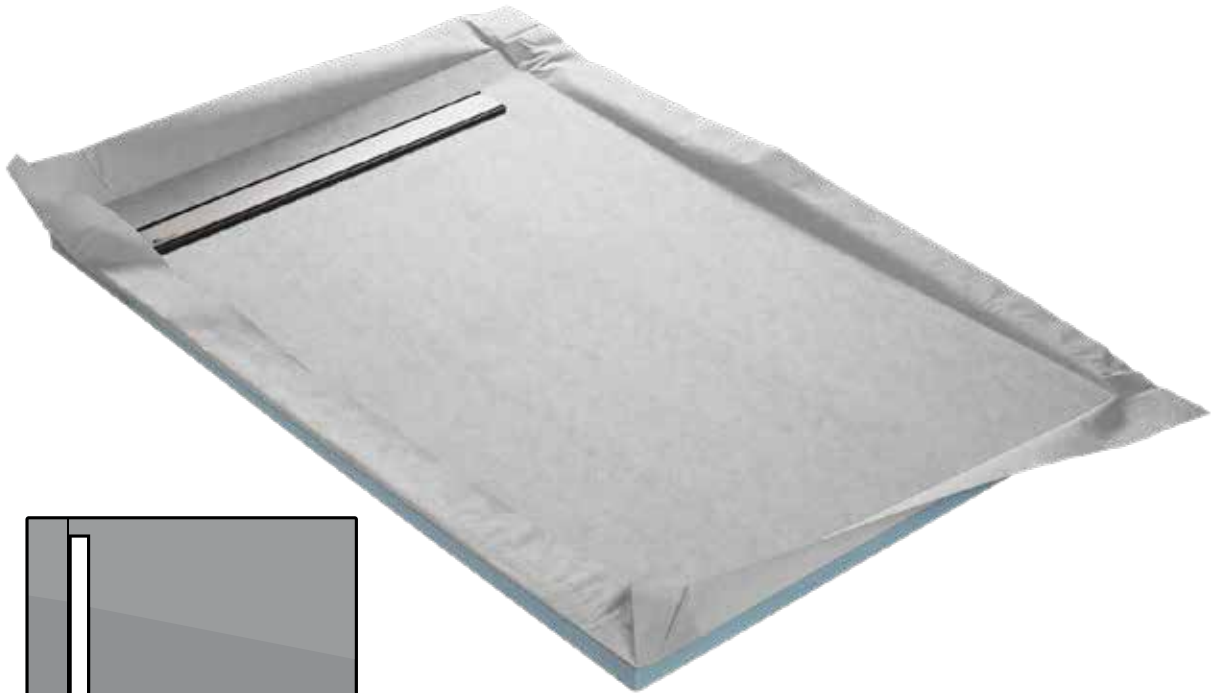

MONOBOARD

TILEABLE SHOWER TRAY


Tileable shower tray with channel grid and ultra-low-profile trap and integrated waterproof mat.

Special design solution for large size tiles


(Also available with 360° trap on request)

**LARGE
FORMAT
TILE
SOLUTION**

**LIGHT
EXTRA-LOW-PROFILE
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES
ULTRA LOW-PROFILE
TRAP**

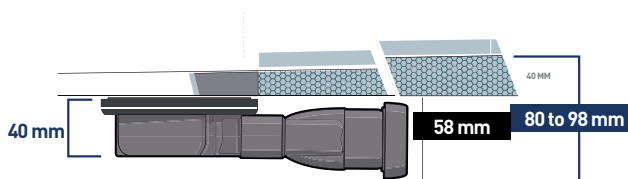


STANDARD GRID PROVIDED




FULL GRID (STANDARD)


OPTIONAL GRIDS



ROUND LINE GRID



SQUARE LINE GRID




TILEABLE GRID

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	POSITION OF TRAP
RC 12090 MONO	TILEABLE CHANNEL SHOWER TRAY MONOSLOPE 1200 X 900	RECTANGULAR SHAPE OFFSET TRAP	1200	900	40	450/135
RC 14090 MONO	TILEABLE CHANNEL SHOWER TRAY MONOSLOPE 1400 X 900		1500	1000	40	450/135
RC 150100 MONO	TILEABLE CHANNEL SHOWER TRAY MONOSLOPE 1500 X 1000		1500	1000	40	500/135
RC 185100 MONO	TILEABLE CHANNEL SHOWER TRAY MONOSLOPE 1850 X 1000		1850	1000	40	500/135




TILEABLE SHOWER TRAY SOLUTIONS CHANNEL OUTLET

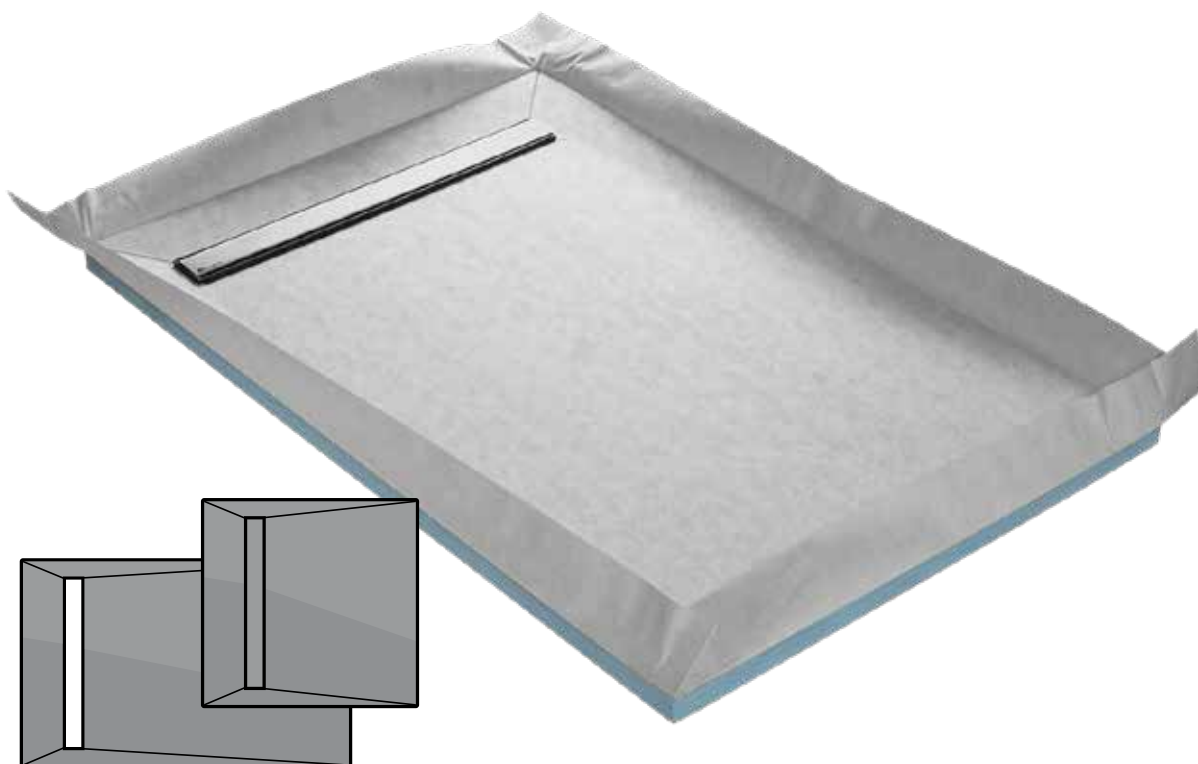

LINEBOARD

TILEABLE SHOWER TRAY


4 slopes, tileable shower tray with channel grid, ultra-low-profile trap and integrated waterproof mat.
Designer solution.
(Also available with 360° trap on request)

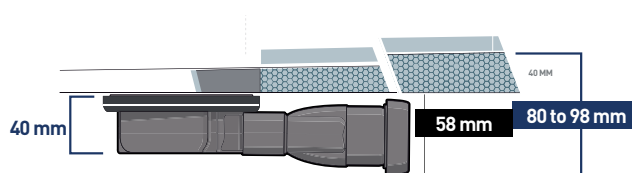

LIGHT
EXTRA-LOW PROFILE
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES
ULTRA LOW-PROFILE
TRAP

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	POSITION OF TRAP
RC 90 LINE	TILEABLE SHOWER TRAY 900X900	OFFSET BATH FORMAT	900	900	40	450/135
RC 100 LINE	TILEABLE SHOWER TRAY 1000X1000		1000	1000	40	500/135
RC 120 LINE	TILEABLE SHOWER TRAY 1200X1200		1200	1200	40	600/135
RC 12090 LINE	TILEABLE SHOWER TRAY 1200X900		1200	900	40	450/135
RC 14090 LINE	TILEABLE SHOWER TRAY 1400X900		1400	900	40	450/135
RC 150100 LINE	TILEABLE SHOWER TRAY 1500X1000		1500	1000	40	500/135
RC 18590 LINE	TILEABLE SHOWER TRAY 1850X900		1850	900	40	450/135

STANDARD GRID PROVIDED



FULL GRID (STANDARD)


OPTIONAL GRIDS



ROUND LINE GRID



SQUARE LINE GRID



TILEABLE GRID




TILEABLE SHOWER TRAY SOLUTIONS STANDARD OUTLET



FLATBOARD COMPLETE KIT

The tileable shower tray is often associated with many accessories, such as the polystyrene riser, the waterproofing kit, not to mention the wall waterproofing.

In addition to the traditional offer, our company has developed a kit for novices that includes not only all the elements to make a walk-in shower, but an educational installation video for all to understand

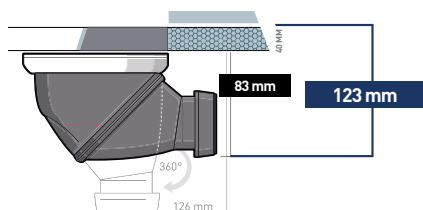

CONTENTS OF THE KIT

- Tileable shower tray with integrated waterproof mat
- 360 ° trap with grid-height spacer
- Stainless steel grid
- Extruded polystyrene riser system to fill the cavity
- Waterproof adhesive mortar to glue the risers and the shower tray
- Waterproof ready-to-tile wall mats to ensure watertight continuity up to 2.50 m
- Assembly video presenting all the stages of the construction of a walk-in shower

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	QUANTITY PER PALLET
KIT 90 JAMES	TILEABLE SHOWER TRAY KIT 900X900	CENTRE	900	900	40	8
KIT 100 JAMES	TILEABLE SHOWER TRAY KIT 1000X1000		1000	1000	40	8
KIT 120 JAMES	TILEABLE SHOWER TRAY KIT 1200X1200		1200	1200	40	8
KIT 12090 JAMES	TILEABLE SHOWER TRAY KIT 1200X900	OFFSET BATH FORMAT	1200	900	40	8
KIT 18590 JAMES	TILEABLE SHOWER TRAY KIT 1850X900		1400	900	40	8

LIGHT
EXTRA-LOW-PROFILE
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES
360° TRAP



STANDARD GRID PROVIDED

SQUARE GRID (STANDARD)



OPTIONAL GRIDS

SQUARE GRID 2



ROUND GRID



DIAGONAL GRID




TILEABLE SHOWER TRAY SOLUTIONS CHANNEL OUTLET



LINEBOARD COMPLETE KIT

As per our complete Flatboard kit,
we offer a complete kit with the channel grid option

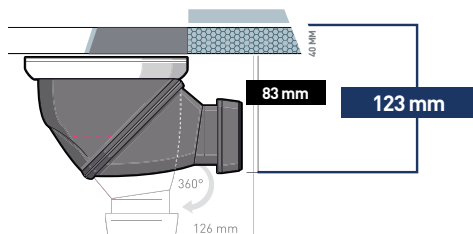


CONTENTS OF THE KIT

- Tileable shower tray with integrated waterproof mat
- 360 ° trap with grid-height spacer
- Stainless steel grid
- Extruded polystyrene riser system to fill the cavity
- Waterproof adhesive mortar to glue the risers and the shower tray
- Waterproof ready-to-tile wall mats to ensure watertight continuity up to 2.50 m
- Assembly video presenting all the stages of the construction of a walk-in shower

REF	DESCRIPTION	FORMAT	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	QUANTITY PER PALLET
KIT 90 CANIV	TILEABLE SHOWER TRAY KIT 900X900	OFFSET BATH FORMAT	900	900	40	8
KIT 100 CANIV	TILEABLE SHOWER TRAY KIT 1000X1000		1000	1000	40	8
KIT 120 CANIV	TILEABLE SHOWER TRAY KIT 1200X1200		1200	1200	40	8
KIT 12090 CANIV	TILEABLE SHOWER TRAY KIT 1200X900		1200	900	40	8
KIT 18590 CANIV	TILEABLE SHOWER TRAY KIT 1850X900		1400	900	40	8


LIGHT
EXTRA-LOW-PROFILE
CAN BE CUT
INTEGRATED
WATERPROOF MAT
COMPATIBLE WITH ALL
TILES
360° TRAP

STANDARD GRID PROVIDED



FULL GRID (STANDARD)


OPTIONAL GRIDS



ROUND LINE GRID



SQUARE LINE GRID



TILEABLE GRID





SUMMARY TABLE

TILEABLE SHOWER TRAYS



FLATBOARD® SHOWER TRAYS
SQUARE OR RECTANGULAR
360° ORIENTABLE
(OR ULTRA-LOW-PROFILE) TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)	F DISPLACEMENT UNDER TRAY (MM)	T TOTAL DISPLACEMENT INCLUDING TRAY (MM)
RC 80 FLAT	800	800	400/400	40	"83 (JAMES 360° TRAP) / 58 (SLIM ULTRA-LOW- PROFILE TRAP)"	"123 (JAMES 360° TRAP) / 98 (SLIM ULTRA- LOW-PROFILE TRAP)"
RC 90 FLAT	900	900	450/450			
RC 100 FLAT	1000	1000	500/500			
RC 120 FLAT	1200	1200	600/600			
RC 150 FLAT	1500	1500	750/750			
RC 12090 FLAT	1200	900	450/320			
RC 14090 FLAT	1400	900	450/320			
RC 16090 FLAT	1600	900	450/320			
RC 150100 FLAT	1500	1000	500/320			
RC 18590 FLAT	1850	900	450/320			
RC 200100 FLAT	2000	1000	500/320			
RC 12090 CENTRE	1200	900	450/600			
RC 18590 CENTRE	1850	900	450/925			

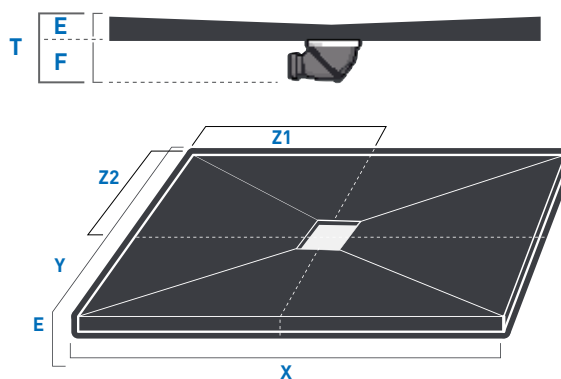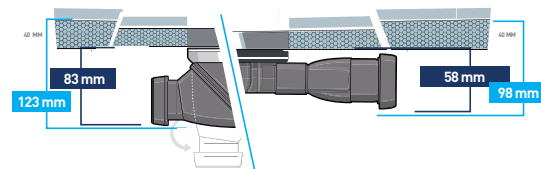



SLIMBOARD® SHOWER TRAYS
SQUARE OR RECTANGULAR
ULTRA-LOW-PROFILE TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)	F DISPLACEMENT UNDER TRAY (MM)	T TOTAL DISPLACEMENT INCLUDING TRAY (MM)
RC 90 SLIM	900	900	450/450	22	40 TO 58	62 TO 83
RC 100 SLIM	1000	1000	500/500			
RC 120 SLIM	1200	1200	600/600			
RC 12090 SLIM	1200	900	450/320			
RC 150100 SLIM	1500	1000	500/320	25	40 TO 58	62 TO 83
RC 18590 SLIM	1850	900	450/320			

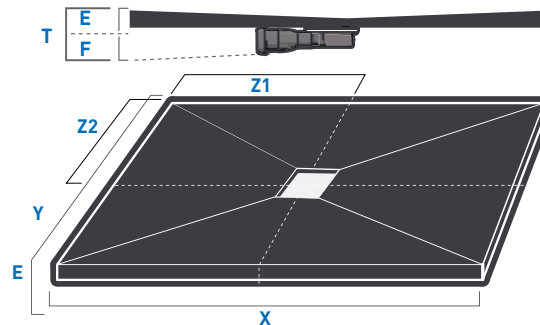
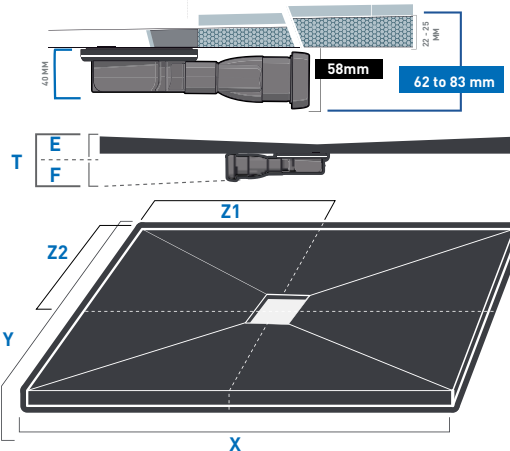


COMPACTBOARD® SHOWER TRAYS
SQUARE OR RECTANGULAR
ULTRA-LOW-PROFILE TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)
RC 90 COMPACT	900	900	450/450	67
RC 100 COMPACT	1000	1000	500/500	
RC 120 COMPACT	1200	1200	600/600	
RC 12090 COMPACT	1200	900	450/320	
RC 150100 COMPACT	1500	1000	500/320	70
RC 18590 COMPACT	1850	900	450/320	

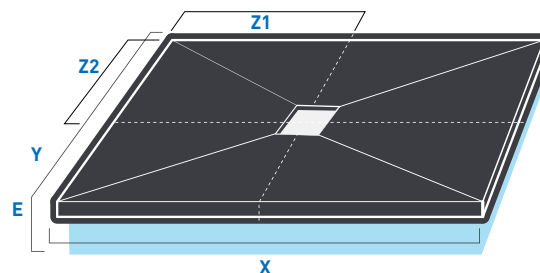



SUMMARY TABLE TILEABLE SHOWER TRAYS

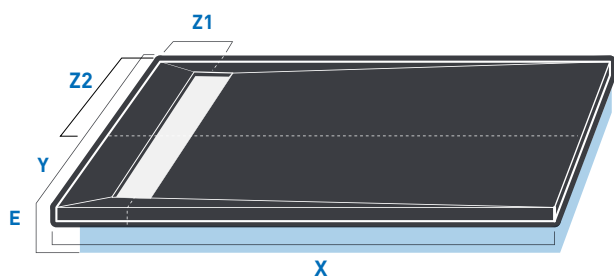



COMPACTLINE® SHOWER TRAYS SQUARE OR RECTANGULAR ULTRA-LOW-PROFILE TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)
RC 90 COMPACT - LINE	900	900	450/135	67
RC 100 COMPACT - LINE	1000	1000	500/135	67
RC 120 COMPACT - LINE	1200	1200	600/135	70
RC 12090 COMPACT - LINE	1200	900	450/135	67
RC 150100 COMPACT - LINE	1500	1000	500/135	70
RC 18590 COMPACT - LINE	1850	900	450/135	70

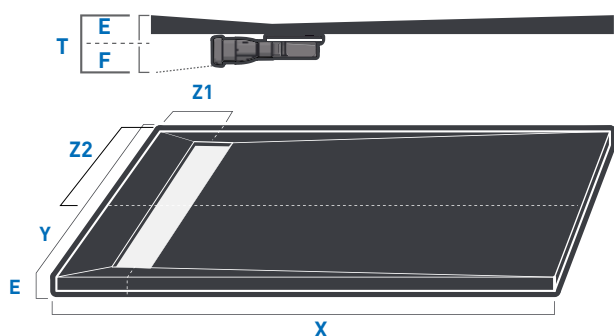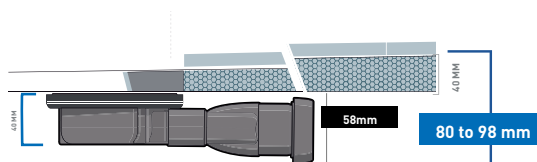

LINEBOARD® SHOWER TRAYS SQUARE OR RECTANGULAR ULTRA-LOW-PROFILE CHANNEL TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)	F DISPLACEMENT UNDER TRAY (MM)	T TOTAL DISPLACEMENT INCLUDING TRAY (MM)
RC 90 LINE	900	900	450/135	40	40 TO 58	80 TO 98
RC 100 LINE	1000	1000	500/135			
RC 120 LINE	1200	1200	600/135			
RC 12090 LINE	1200	900	450/135			
RC 150100 LINE	1500	1000	500/135			
RC 18590 LINE	1850	900	450/135			

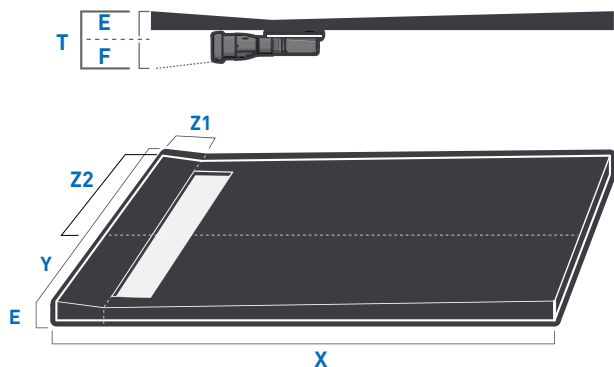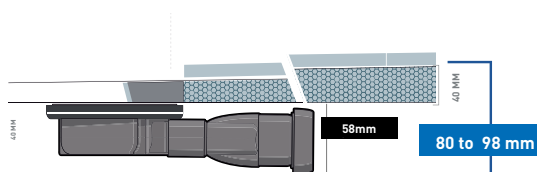

MONOBOARD® SHOWER TRAYS SQUARE OR RECTANGULAR ULTRA-LOW-PROFILE CHANNEL TRAP VERSION

REF	X LENGTH (MM)	Y WIDTH (MM)	Z2 / Z1 POSITION OF TRAP	E THICKNESS OF TRAY (MM)	F DISPLACEMENT UNDER TRAY (MM)	T TOTAL DISPLACEMENT INCLUDING TRAY (MM)
RC 12090 LINE	1200	900	450/135	40	40 TO 58	80 TO 98
RC 14090 LINE	1400	900	450/135			
RC 150100 LINE	1500	1000	500/135			
RC 185100 LINE	1850	1000	500/135			



SUMMARY DIMENSION TABLES

COMPLETE KITS

COMPLETE KIT FLATBOARD

REF	THICKNESS (MM)	LENGTH (MM)	WIDTH (MM)
KIT 90 JAMES	40	900	900
KIT 100 JAMES	40	1000	1000
KIT 120 JAMES	40	1200	1200
KIT 12090 JAMES	40	1200	900
KIT 18590 JAMES	40	1400	900

COMPLETE KIT LINEBOARD

REF	THICKNESS (MM)	LENGTH (MM)	WIDTH (MM)
KIT 90 CANIV	40	900	900
KIT 100 CANIV	40	1000	1000
KIT 120 CANIV	40	1200	1200
KIT 12090 CANIV	40	1200	900
KIT 18590 CANIV	40	1400	900



SUMMARY TABLE

FLOOR DRAIN SOLUTIONS

FLOOR DRAIN

REF	DESCRIPTION	UNDERLAY SIZE (MM)	GRID WIDTH (MM)	GRID LENGTH (MM)	UNDERLAY THICKNESS (MM)
RC 20 ACIER	360° FLOOR DRAIN	200 X 200	115	115	10
RC 20 SLIM	ULTRA-LOW-PROFILE FLOOR DRAIN	200 X 200	115	115	10

SHOWER CHANNEL

REF	TOTAL LENGTH (MM)	GRID LENGTH (MM)	TOTAL WIDTH (MM)	GRID WIDTH (MM)	DISPLACEMENT UNDER CHANNEL - HORIZONTAL VERSION (MM)	DISPLACEMENT UNDER CHANNEL - VERTICAL VERSION (MM)
LD 70	750	700	140	70	83	123
LD 80	850	800				
LD 90	950	900				
LD 100	1050	1000				
LD 120	1250	1200				

REF	DESCRIPTION	TOTAL LENGTH (MM)	GRID LENGTH (MM)	TOTAL WIDTH (MM)	GRID WIDTH (MM)	DISPLACEMENT UNDER CHANNEL (MM)	WEIGHT (KG)	QUANTITY PER BOX
LD 70 JAMES	FLOOR DRAIN CHANNEL WITH 360° TRAP	750	700	250	70	83	3	1 Piece
LD 70 SLIM	FLOOR DRAIN CHANNEL WITH SLIM ULTRA-LOW-PROFILE TRAP	750	700			45		



SUMMARY DIMENSION TABLES

CONSTRUCTION PANELS

STANDARD PANELS

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	U VALUE (W/m2K)	R VALUE (m2.K/ W)	QUANTITY PER PALLET
4 EB 125	PANEL 1250 X 600 X 4	4	600	1250	0.98	9.9	0.06	165
6 EB 125	PANEL 1250 X 600 X 6	6		1250	1.02	7	0.12	150
10 EB 250	PANEL 2500 X 600 X 10	10		2500	2.25	3.5	0.25	215
125 EB 250	PANEL 2500 X 600 X 12.5	12.5			2.33	2.7	0.33	150
20 EB 250	PANEL 2500 X 600 X 20	20			2.7	1.5	0.56	106
30 EB 250	PANEL 2500 X 600 X 30	30			3.15	1	0.86	75
40 EB 250	PANEL 2500 X 600 X 40	40			3.6	0.7	1.16	60
50 EB 250	PANEL 2500 X 600 X 50	50			4.05	0.57	1.47	45
80 EB 250	PANEL 2500 X 600 X 80	80			4.13	0.5	2.33	25

BATH SKIRTS

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
30 EB 185 55	SKIRT WITHOUT FEET	30	550	1850	2.4	75
30 EB 177			600	1770	2.4	75
30 TAB 90	SKIRT WITH FEET	30	600	900	1.2	75
30 TAB 180				1800	2.4	75

CONCEALED FRAME CLADDING

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT (KG)
TOILET BOARD	CONCEALED FRAME CLADDING - PRE-CUT	20	1200	1550	4
TOILET BOX	TILEABLE SUPPORT FRAME CLADDING KIT	30	600	1250	4

ANGULAR PANELS

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
20 ANG 150	ANGULAR PANEL 15 X 15 CM	20	150 x 150	2500	1.6	75
20 ANG 200	ANGULAR PANEL 20 X 20 CM		200 x 200		2	75
20 ANG 300	ANGULAR PANEL 30 X 30 CM		300 x 300		3.2	75
20 ANG 400200	ANGULAR PANEL 40 X 20 CM		400 x 200			75

GROOVED PANELS

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
30 JAGL 250	GROOVED PANEL - ALONG LENGTH	30	600	2500	2.5	75
30 JAGW 250	GROOVED PANEL - ALONG WIDTH					

TILEABLE CORNERS

REF	DESCRIPTION	THICKNESS (MM)	WIDTH (MM)	LENGTH (MM)	WEIGHT PER PANEL (KG)	QUANTITY PER PALLET
TILE CORNER	TILEABLE SHELF FOR BATHROOM	30	240	240	0.5	1 Piece

TILEABLE NICHE

REF	DESCRIPTION	THICKNESS (MM)	DEPTH (MM)	LENGTH (MM)	WIDTH (MM)	WEIGHT (KG)	QUANTITY PER BOX
NICHE 4020	TILEABLE NICHE FOR BATHROOM	10	100	400	200	2	1 Piece
NICHE 4030					300		
NICHE 4040					400		
NICHE 8025				800	250	2.5	


MERCHANDISING TOOLS

AT YOUR DISPOSAL

PYRAMID FOR TILEABLE PANELS

30 x 30 cm pyramid with all thicknesses of panels to be tiled.
Ideal for counters and technical corners in showrooms.

REF PYRAMID



MINI TILEABLE SHOWER TRAY

50 x 50 cm model to present tileable shower trays with integrated waterproof mat and trap. Ideal for counters and for external reps.

REF RC50FLAT (James trap) or RC50SLIM (Slim trap)



SHORT MERCHANDISING DISPLAY FOR THIN BOARDS

Low cabinet of 1.4m with a 60x60cm small footprint.
Ideal to integrate in technical corners. Possible to fit up to 100 thin panels in 4mm and 6mm

REF MEUBLE 60



TALL MERCHANDISING DISPLAY - 1 METRE

Tall cabinet of 2.70m x 1.00 m x 60cm. Ideal to integrate in technical corners. Allows the integration of 1.25 m and 2.50 m high panels of different thicknesses for optimized stock.

REF MEUBLE 100



TALL MERCHANDISING DISPLAY - 2 METRE

Tall cabinet of 2.70m x 2.00 m x 60cm. Ideal to integrate in technical corners. Allows the integration of 1.25 m and 2.50 m high panels of different thicknesses for optimized stock.

REF MEUBLE 200



TERMS AND CONDITIONS



STANDARD CONDITIONS OF AGREEMENT FOR U-TILE SA (PTY) LTD

1. The Customer agrees that (a) this Agreement represents the entire Agreement between the Customer and U TILE SA (PTY) LTD (Pty) Limited (hereinafter called U TILE SA (PTY) LTD) and that no alterations or additions to this Agreement may be effected unless agreed to by both parties, reduced to writing and signed by the Customer and a duly authorized representative of U TILE SA (PTY) LTD; (b) this Agreement will govern all future contractual relationships between the parties; (c) this Agreement is applicable to all existing debts between the parties; (d) this Agreement is final and binding and is not subject to any suspension or dissolutive conditions; (e) any conflicting conditions stipulated by the Customer are expressly excluded; (f) these terms supersede all previous conditions of agreement without prejudice to any securities or guarantees held by U TILE SA (PTY) LTD and (g) these terms apply to all servants and subcontractors of U TILE SA (PTY) LTD.

2. This Agreement only becomes final and binding on receipt of the acceptance of any order by U TILE SA (PTY) LTD at its business address in Port Elizabeth.

3. The signatory hereby binds himself / herself in his / her personal capacity as Shareholder (in the case of a company), Member (in the case of close corporations) or Owner or Partner as co-debtor jointly and severally for the full amount due to U TILE SA (PTY) LTD and agrees that these Standard Conditions will apply in the exact same way to him / her.

4. The Customer acknowledges that it does not rely on any representations made by U TILE SA (PTY) LTD in regard to the goods and services or any of its qualities leading up to this Agreement other than those contained in this Agreement. All specifications, price lists, performance figures, advertisements, brochures and other technical data furnished by U TILE SA (PTY) LTD in respect of the goods or services orally or in writing will not form part of the Agreement in any way unless agreed to in writing by U TILE SA (PTY) LTD.

5.1 The Customer agrees that neither U TILE SA (PTY) LTD nor any of its employees will be liable for any negligent or innocent misrepresentations made to the Customer.

5.2 It is the sole responsibility of the Customer to determine that the goods or services ordered are suitable for the purposes of intended use.

5.3 The Customer agrees to pay all costs resulting from any acts or omissions of the Customer including suspension of work, modification of requirements, failure or delay in giving particular requisite to enable work to proceed on schedule or requirements that work be completed earlier than agreed.

5.4 U TILE SA (PTY) LTD reserves the right at its sole discretion to provide alternative goods at the prevailing prices to those ordered by the Customer should such goods be superseded, replaced or its manufacture terminated.

6.1 All quotations will remain valid for a period of 30 days from the date of the quotation or until the date of issue of a new Price List, whichever occurs first.

6.2 All quotations are subject to the availability of the goods or services and subject to correction of good faith errors by U TILE SA (PTY) LTD and the prices quoted are subject to any increases in the cost price, including currency fluctuations, of U TILE SA (PTY) LTD before acceptance of the order.

6.3 If the Customer disputes the amount of increase, the amount of the increase may be certified by any independent auditor and such certificate shall be final and binding on the Customer.

6.4 The Customer hereby confirms that the goods or services on the Tax Invoice issued duly represent the goods or services ordered by the Customer at the prices agreed to by the Customer and, where delivery / performance has already taken place, that the goods or services were inspected and that the Customer is satisfied that these conform in all respects to the quality and quantity ordered and are free from any defects.

6.5 Notwithstanding the provisions of section 1 above, all orders or agreed variations to orders, whether oral or in writing, shall be binding and subject to these standard conditions of agreement and may not be cancelled.

6.6 U TILE SA (PTY) LTD shall be entitled in its sole discretion to split the delivery / performance of the goods or services ordered in the quantities and on the dates it decides.

6.7 U TILE SA (PTY) LTD shall be entitled to invoice each delivery / performance actually made separately.

6.8 Any delivery note or waybill or job card (copy or original) signed by the Customer or a third party engaged to transport the goods and held by U TILE SA (PTY) LTD shall be conclusive proof that delivery was made to the Customer.

6.9 The risk of damage to, destruction or theft of goods shall pass to the Customer on acceptance of any order placed in terms of this Agreement and the Customer undertakes to comprehensively insure the goods until paid for in full. U TILE SA (PTY) LTD may recover insurance premiums from the Customer for such uninsured goods.

6.10 Delivery, installation and performance times quoted are merely estimates and are not binding on U TILE SA (PTY) LTD.

6.11 If U TILE SA (PTY) LTD agrees to engage a third party to transport the goods, U TILE SA (PTY) LTD is hereby authorised to engage a third party on the Customer's behalf and on the terms deemed fit by U TILE SA (PTY) LTD.

6.12 The Customer indemnifies U TILE SA (PTY) LTD against any claims that may arise from such agreement in clause 6.11 against U TILE SA (PTY) LTD.

6.13 Repair times and repair costs given are merely estimates and are not binding on U TILE SA (PTY) LTD.

6.14 Any item handed in for repair may be sold by U TILE SA (PTY) LTD to defray the cost of such repairs if the item remains uncollected within 30 days of the repairs being completed.

6.15 All goods taken on an approval or consignment basis by the Customer are deemed sold if not returned within 10 days of issue in the original condition, in the original packaging and with all accessories and manuals intact.

6.16 The Customer acknowledges all copyrights and shall not duplicate copyrighted material and that each infringing attempt shall immediately render the full prevailing price payable to U TILE SA (PTY) LTD.

6.17 The Customer shall indemnify U TILE SA (PTY) LTD against any claims, costs and expenses arising out of the infringement of copyright, patent, trademark or design supplied by the Customer.

Services carry no guarantee.

7.2 No claim under this Agreement shall arise unless the Customer has, within 3 days of the alleged breach or defect occurring, given U TILE SA (PTY) LTD 30 days written notice by prepaid registered post to rectify any defect or breach of Agreement.

7.3 To be valid, claims must be supported by the original Tax Invoice.

7.4 The Customer shall return any defective moveable goods to the premises of U TILE SA (PTY) LTD at the Customer's own cost and packed in the original or suitable packaging.

and all risks for the duration of repair remain with the Customer.

8.1 Under no circumstances shall U TILE SA (PTY) LTD be liable for any consequential damages for any Delictual liability of any nature whatsoever.

8.2 Under no circumstances shall U TILE SA (PTY) LTD be liable for any damage arising from any misuse, abuse or neglect of the goods or services.

9. Delivery of the goods or services to the Customer shall take place at the place of business of U TILE SA (PTY) LTD.

10.1 The Customer agrees that the amount contained in a Tax Invoice issued by U TILE SA (PTY) LTD shall be due unconditionally (a) cash on order; or (b) if the Customer is a Credit Approved Customer, within the granted credit period as specified on the Credit Application after a Tax Invoice has been issued by U TILE SA (PTY) LTD.

10.2 The Customer agrees to pay the amount on the Tax Invoice at the offices of U TILE SA (PTY) LTD or at such other place U TILE SA (PTY) LTD may designate in writing.

10.3 The risk of payment by cheque through the post rests with the Customer.

11.1 The Customer has no right to withhold payment for any reason whatsoever and agrees that no extension of payment of any nature shall be extended to the Customer and any such extension will not be applicable or enforceable unless agreed to by U TILE SA (PTY) LTD, reduced to writing and signed by the Customer and a duly authorized representative of U TILE SA (PTY) LTD.

11.2 The Customer is not entitled to set off any amount due to the Customer by U TILE SA (PTY) LTD against this debt.

11.3 All discounts shall be forfeited if payment in full is not made on the due date.

12.1 The Customer agrees that the amount due and payable to U TILE SA (PTY) LTD may be

determined and proven by a certificate issued and signed by any director or manager or member or partner. Such certificate shall be binding and shall be prima facie proof of the indebtedness of the Customer.

12.2 Any printout of computer evidence tendered by any party shall be admissible evidence and no party shall object to the admissibility of such evidence purely on grounds that such evidence is computer evidence or that the requirements of the Computer Evidence Act have not been met.

13.1 The Customer agrees that interest shall be payable at the maximum legal interest rate prescribed in terms of the Usury Act on any moneys past due date to U TILE SA (PTY) LTD and that interest shall be calculated daily and compounded monthly from the date of acceptance of the order.

13.2 The Customer expressly agrees that no debt owed to U TILE SA (PTY) LTD by the Customer shall become prescribed before the passing of a period of ten years from the date the debt falls due.

14.1 The Customer agrees that if an account is not settled in full (a) against order; or (b) within the period agreed in clause 10.1 above in the case of a Credit Approved Customer; U TILE SA (PTY) LTD is: (i) entitled to immediately institute action against the Customer at the sole expense of the Customer; or (ii) to cancel the agreement and take possession of any goods delivered to the Customer and claim damages. These remedies are without prejudice to any other right U TILE SA (PTY) LTD may be entitled to in terms of this agreement or in law. U TILE SA (PTY) LTD reserves its right to stop supply immediately on cancellation or on non-payment.

14.2 A Credit Approved Customer will forthwith lose this approval when payment is not made according to the conditions of 10.1(b) and all amounts then outstanding shall immediately become due and payable.

15.1 In the event of cancellation, the Customer shall be liable to pay (a) the difference between the selling price and the value of the goods at the time of repossession and (b) all other costs incurred in the repossession of the goods. The value of repossessed or retained pledged goods shall be deemed to be the value placed on them by any sworn valuator after such repossession, and such valuation shall be conclusive proof of the value. If the goods are not recovered for any reason whatsoever, the value shall be deemed to be nil.

15.2 The Customer irrevocably authorises U TILE SA (PTY) LTD to enter its premises to repossess any goods delivered and indemnifies U TILE SA (PTY) LTD completely against any damage whatsoever relating to the removal of repossessed goods.

15.3 In the event of cancellation U TILE SA (PTY) LTD is entitled not to produce any unmade balance of a contract and to recover any loss sustained thereby from the Customer.

16.1 All goods supplied by U TILE SA (PTY) LTD remain the property of U TILE SA (PTY) LTD until such goods have been fully paid for whether such goods are attached to other property or not.

16.2 The Customer is not entitled to sell or dispose of any goods unpaid for without the prior written consent of U TILE SA (PTY) LTD. The Customer shall not allow the goods to become encumbered in any manner prior to the full payment thereof and shall advise third parties of the rights of U TILE SA (PTY) LTD in the goods.

16.3 If any goods supplied to the Customer are of a generic nature and have become the property of the Customer by operation of law (confusio or commixtio) the Customer shall be obliged on notice of cancellation of the agreement to retransfer the same quantity of goods in ownership to U TILE SA (PTY) LTD.

16.4 The Customer agrees to accept any quantity that does not exceed or fall short of the quantity ordered by no more than 0% as good and complete performance and may request U TILE SA (PTY) LTD to pay only the proportionate contract price for the actual quantity dispatched which request will not be unreasonably withheld.

17.1 The Customer shall be liable to U TILE SA (PTY) LTD for all legal expenses on the attorney-and-own client scale of an attorney and counsel incurred by U TILE SA (PTY) LTD in the event of (a) any default by the Customer or (b) any litigation in regard to the validity and enforceability of this agreement. The Customer shall also be liable for any tracing, collection or valuation fees incurred as well as for any costs, including stamp duties, for any form of security that U TILE SA (PTY) LTD may demand.

17.2 The Customer shall pay three thousand Rand into court or furnish sufficient security in lieu of costs in any action instituted by or against the Customer.

17.3 The Customer agrees that U TILE SA (PTY) LTD will not be required to furnish security in terms of Rule 62 of the Rules of Court of the Magistrate's Courts or in terms of Rule 47 of the Law of the Supreme Court 59 of 1959.

18. The Customer agrees that no indulgence whatsoever by U TILE SA (PTY) LTD will affect the terms of this agreement or any of the rights of U TILE SA (PTY) LTD and such indulgence shall not constitute a waiver by U TILE SA (PTY) LTD in respect of any of its rights herein. Under no circumstances will U TILE SA (PTY) LTD be estopped from exercising any of its rights in terms of this Agreement.

19. The Customer hereby consents that U TILE SA (PTY) LTD shall have the right to institute any legal action in either the Magistrate's Court or the High Court at its sole discretion.

20.1 Any document shall be deemed duly presented to and accepted by the Customer (i) within 3 days of prepaid registered mail to any of the Customer's business or postal addresses or to the personal address of any director, member or owner of the Customer; or (ii) within 24 hours of being faxed to any of the Customer's fax numbers or any director, member's or owner's fax numbers; or (iii) on being delivered by hand to the Customer or any director, member or owner of the Customer; or (iv) within 48 hours if sent by overnight courier; (v) within 24 hours of being telexed to the Customer's telex number or (vi) within 7 days of being sent by surface mail.

20.2 The Customer chooses its address for legal execution as the business address or the physical addresses of any Director (in the case of a company), Member (in the case of close corporations) or of the Owner(s) or Partner(s).

20.3 The Customer undertakes to inform U TILE SA (PTY) LTD in writing within 7 days of any change of Director, Member, Shareholder, Owner or Partner or address or 14 days prior to selling or alienating the Customer's business and failure to do so will constitute a material breach of this agreement. Upon receipt of such written notification, U TILE SA (PTY) LTD reserves the right, at its sole discretion, to withdraw any credit facility advanced to the Customer.

20.4 The Customer hereby consents to the storage and use by U TILE SA (PTY) LTD of the personal information that it has provided to U TILE SA (PTY) LTD for establishing its credit rating and to U TILE SA (PTY) LTD disclosing such information to credit control companies, banks and other institutions involved in rating credit. The Customer agrees that U TILE SA (PTY) LTD will not be held liable for the good faith disclosure of any of this information to such a third party and that no further specific consent need be obtained for the transfer of such information to a specific third party.

20.5 The Customer hereby consents that U TILE SA (PTY) LTD can provide personal information of the Customer to third parties, if the Customer has indicated U TILE SA (PTY) LTD as a trade reference to third parties and the Customer agrees that U TILE SA (PTY) LTD will not be liable for the good faith disclosure of any of this information to such third parties.

20.6 The Customer hereby agrees that the credit facility is a variable credit facility and that U TILE SA (PTY) LTD shall be entitled to increase its credit limit from time to time.

21. The Customer agrees to the Standard Rates of U TILE SA (PTY) LTD for any goods or services rendered, which rates may be obtained on request.

22. The invalidity of any part of this Agreement shall not affect the validity of any other part.

23. Any order is subject to cancellation by U TILE SA (PTY) LTD due to Acts of God from any cause beyond the control of U TILE SA (PTY) LTD, including (without restricting this clause to these instances): inability to secure labour, power, materials or supplies, or by reason of an act of God, war, civil disturbance, riot, state of emergency, strike, lockout, or other labour disputes, fire, flood, drought or legislation.

24. Any order is subject to cancellation by U TILE SA (PTY) LTD if the Customer breaches any term of this Agreement or makes any attempt of compromise, liquidation, sequestration, termination or judgement is recorded against the Customer or any of its principals.

25. The Customer agrees that U TILE SA (PTY) LTD will be immediately and irrevocably released from any contractual damages and penalty obligations should any event in clause 23 or 24 occur.

26. This Agreement and its interpretation is subject to South African law and the Customer consents to the exclusive jurisdiction of the South African Courts referred to in 19.



WWW.U-TILE.CO.ZA